PANEL CUTOUT

$[117.0^{+0.4}_{0.0}]$
$4.61^{+0.02}_{-0.00}$

$[91.0^{+0.4}_{0.0}]$
$3.58^{+0.02}_{-0.00}$

[2.0 MAX]
R0.08 MAX

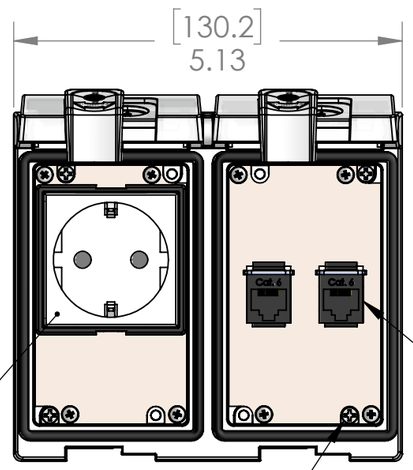


SCHUKO EU1-16R
16A, 250V RECPT

(2X) RJ45 Cat 6 Jack
EXTERIOR/INTERIOR

(X4) USE PH2 SCREW DRIVER ON MOUNTING SCREWS. (REF. MOUNTING SCREW TORQUE)

ROTATE TWO TURNS COUNTER CLOCKWISE TO RELEASE THE TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO THEIR CLAMPING POSITION AS MOUNTING SCREWS TIGHTEN. DO NOT OVER-TORQUE!

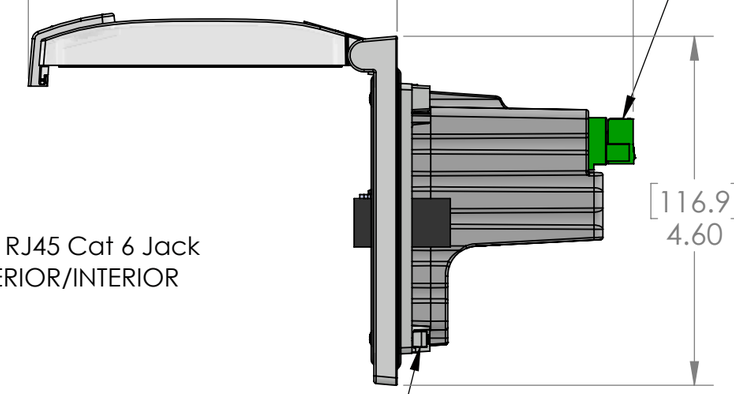


3 POLE PLUGGABLE TERMINAL BLOCK FOR INCOMING POWER

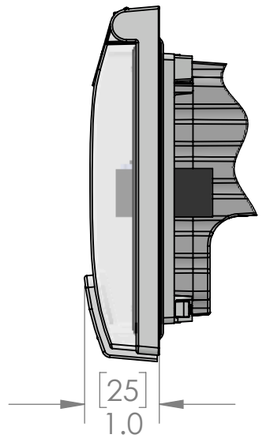


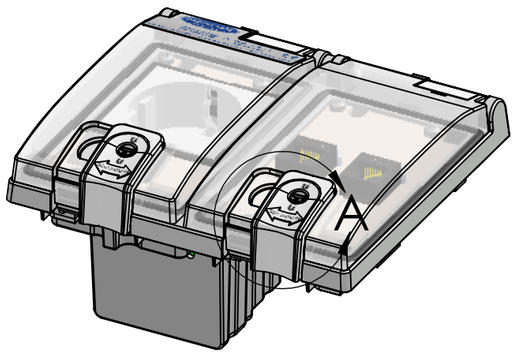


SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

LOCK




DETAIL A
SCALE 1 : 1

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

| PIC RATINGS/SPECIFICATIONS | |
|---|---|
| VOLTS: | 250V |
| AMPS: | 15A |
| SCCR: | 10kA |
| NEMA/UL \| EN 60529: | 4, 12 \| IP65 |
| PANEL THICKNESS: | 5.0mm max |
| MOUNTING SCREW TORQUE: | 0.8N-m |
| TERMINAL BLOCK TORQUE: | 0.5N-m |
| INCOMING POWER WIRE SIZE: | 0.25 - 2.5 sq mm / 24-12AWG |
| WIRE STRIP LENGTH: | 7 - 8 mm |

| | |
|---|---|
| OPERATING TEMPERATURE: | (-5°C / +50° C (+23° F / +122° F )) |

| HOUSING MATERIALS | |
|---|---|
| BODY: | NICKEL PLATED ZINC |
| GASKETS: | PUR FIPG |
| FRONT COVER: | POLYCARBONATE |
| LATCH & LOCK: | PBT |
| BACK COVER: | POLYPROPYLENE |


**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.


UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | DCG |
| DRAWN DATE | 08/29/2024 |
| CHECKED BY | RP |
| CHECK DATE | 08/30/2024 |

COMMENTS:

MENCOM CORPORATION

TITLE:

EURO (SCHUKO) 16A RCPT; 2 RJ45; LP2

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | LP2-EP-2RJ45 | C |

SCALE: 1:2 | WEIGHT: | SHEET 1 OF 1