PANEL CUTOUT

[117.0 +0.4 0.0]
4.61 +0.02 -0.00

[91.0 +0.4 0.0]
3.58 +0.02 -0.00

[2.0 MAX]
R0.08 MAX

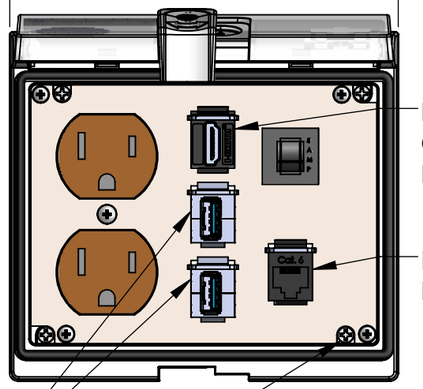

[130.2]
5.13

HDMI KEYSTONE CONNECTOR
CONFIGURED FEMALE EXTERIOR /
FEMALE INTERIOR

RJ45 Cat 6 Jack
EXTERNAL/INTERNAL

(2X)USB 3.0 TYPE A CONFIGURED
FEMALE EXTERIOR / FEMALE INTERIOR

(X4) USE PH2 SCREW
DRIVER ON MOUNTING
SCREWS. (REF. MOUNTING
SCREW TORQUE)

ROTATE TWO TURNS COUNTER
CLOCKWISE TO RELEASE THE
TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO
THEIR CLAMPING POSITION AS
MOUNTING SCREWS TIGHTEN.
DO NOT OVER-TORQUE!

[123.6]
4.87

[79.7]
3.14

3 POLE PLUGGABLE
TERMINAL BLOCK
FOR INCOMING POWER

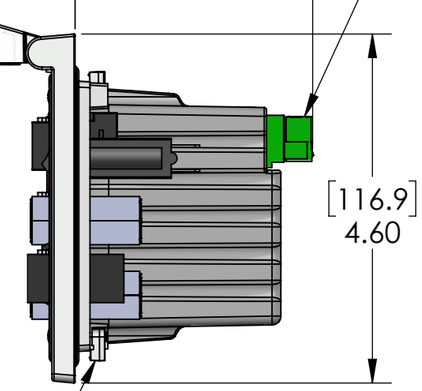

[116.9]
4.60

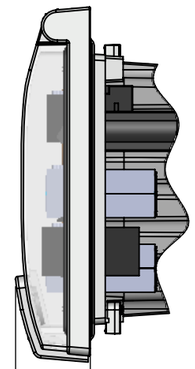

[25.1]
0.99

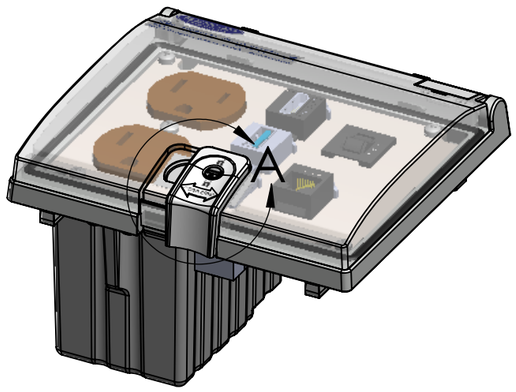

SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

LOCK

DETAIL A
SCALE 1 : 1

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	5A
SCCR:	0.2kA
NEMA/UL | EN 60529:	4, 12 | IP65
PANEL THICKNESS:	5.0mm max
MOUNTING SCREW TORQUE:	0.8N-m
TERMINAL BLOCK TORQUE:	0.5N-m
INCOMING POWER WIRE SIZE:	0.25 - 2.5 sq mm / 24-12AWG
WIRE STRIP LENGTH:	7 - 8 mm

c UL us
LISTED
ENCL. ACC.
5JR2

OPERATING TEMPERATURE:	(-10°C / +60° C (+14° F / +140° F))
HOUSING MATERIALS	
BODY:	NICKEL PLATED ZINC
GASKETS:	PUR FIPG
FRONT COVER:	POLYCARBONATE
LATCH & LOCK:	PBT
BACK COVER:	POLYPROPYLENE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	DCG
DRAWN DATE	07/13/2021
CHECKED BY	DCG
CHECK DATE	07/16/2021

COMMENTS:

MENCOM CORPORATION

TITLE:
CC;DP;HDMI;RJ45;2USB-AA;5R;LP3

SIZE	DWG. NO.	REV
B	LP3-DP-HDMI-RJ45-2USB-AFAF-5R	B
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1