
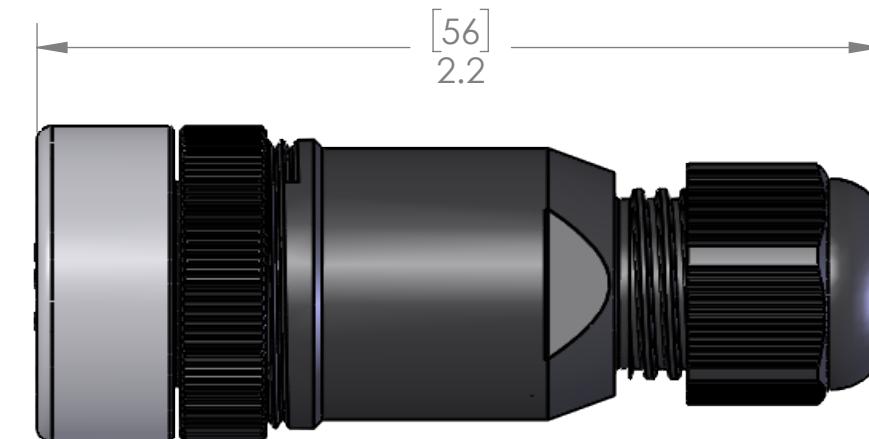


D

D

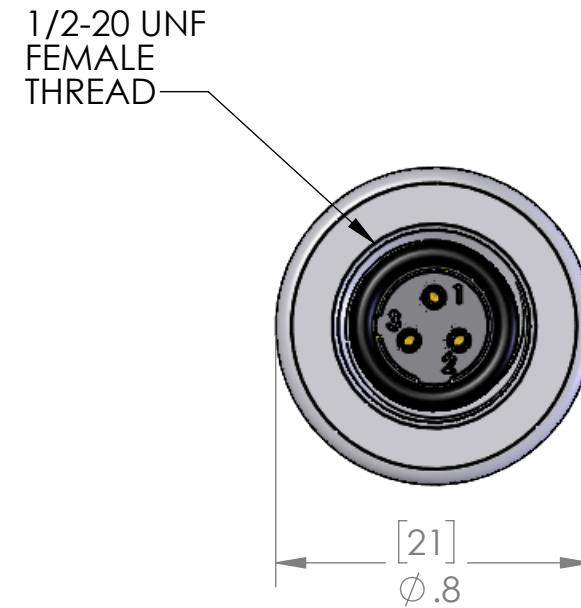

MATERIALS:	
BODY:	POLYAMIDE
COUPLING:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
GROMMET:	NBR
O-RING:	FPM & NBR
SPECIFICATIONS:	
WIRE RANGE:	18-24AWG [1.0 - 0.25sqmm]
CABLE RANGE:	0.118 - 0.255 [3 - 6.5mm]
CONNECTION:	SCREW TERMINALS
VOLTS:	250V
AMPS:	4A
SEAL:	IP67
TEMP RANGE:	STATIC: -40°C - +105°C
	DYNAMIC: -20°C - +105°C

Voltage rating is 250V or the rating of the cable, whichever is less.

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM	MENCOM CORPORATION			
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	07/25/2023				
CHECKED BY	CHECK DATE	JJH 07/25/2023				
MATERIAL	FINISH					
COMMENTS:				SIZE DWG. NO. REV		
				B MAC-3FP-FW07 B		
DO NOT SCALE DRAWING				SCALE: 2:1 WEIGHT: SHEET 1 OF 1		

8

7

6

5

4

3

2

1

A