REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	10/15/2007	

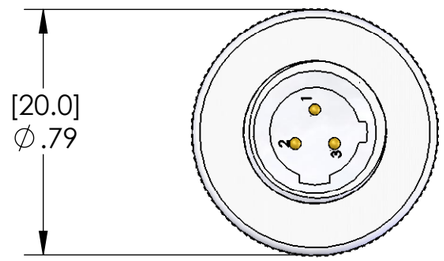

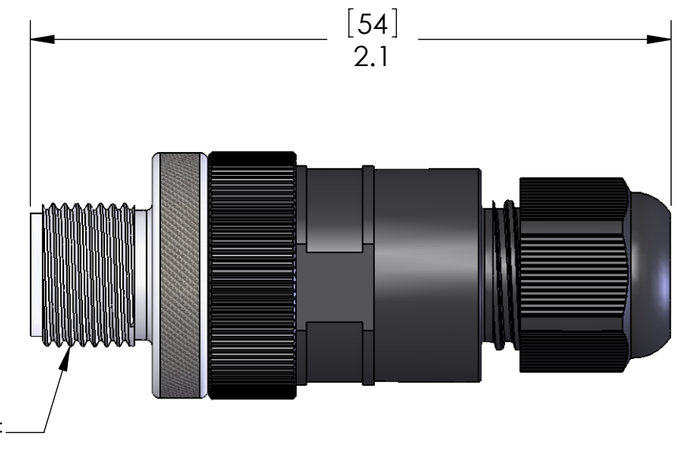

CABLE RANGE: 0.157" - 0.236" (4 - 6mm)

WIRES ARE TERMINATED
VIA SCREW TERMINALS

SPECIFICATIONS:	
VOLTS:	250V
AMPS:	4A
SEALING:	IP67
WIRE RANGE:	18 - 24AWG (1.0 - 0.34sqmm)

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD COPPER ALLOY
COUPLING:	NICKEL PLATED COPPER ALLOY
INSERT:	POLYAMIDE
O-RING:	NBR
GLAND SEAL:	NBR

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

	NAME
DRAWN	BEM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:
3 POLE FIELD WIREABLE

SIZE	DWG. NO.	REV
B	MAC-3MP-FW07	A

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1