FEMALE	WIRING	MALE
PIN #		PIN #
1	----------	1
2	----------	2
3	----------	3
4	----------	4

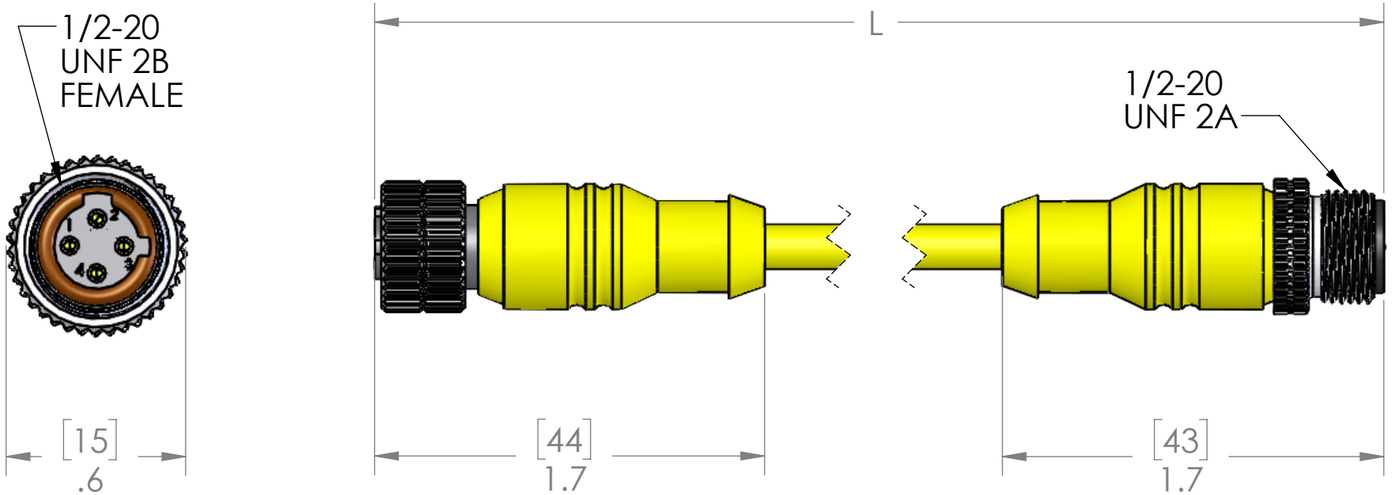

P/N	L	STD?
MAC-4MFP-1M	40" [1M]	YES
MAC-4MFP-2M	79" [2M]	YES
MAC-4MFP-4M	157" [4M]	NO
MAC-4MFP-5M	197" [5M]	YES
MAC-4MFP-6M	236" [6M]	NO
MAC-4MFP-10M	393" [10M]	YES
MAC-4MFP-15M	590" [15M]	YES
MAC-4MFP-20M	786" [20M]	NO
MAC-4MFP-30M	1179" [30M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

VOLTS	300V
AMPS	4A
TEMP:	105°C

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	08/02/2023
CHECKED BY	JJH
CHECK DATE	08/03/2023

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MAC-4MFP-ZZ	C
SCALE: 1.5:1	WEIGHT:	SHEET 1 OF 1