| PIN # | COLOR |
|---|---|
| | |
| 1 | RED w/WHITE |
| 2 | RED |
| 3 | GREEN / YELLOW |
| 4 | RED w/YELLOW |
| 5 | RED w/BLACK |

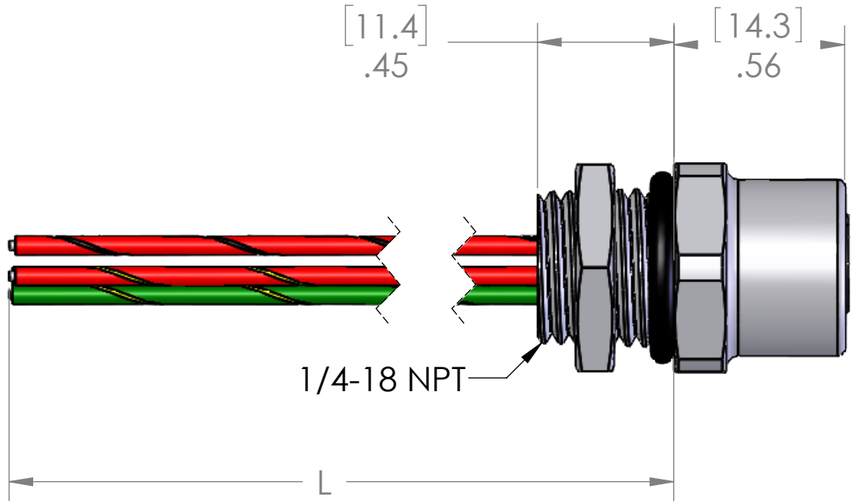


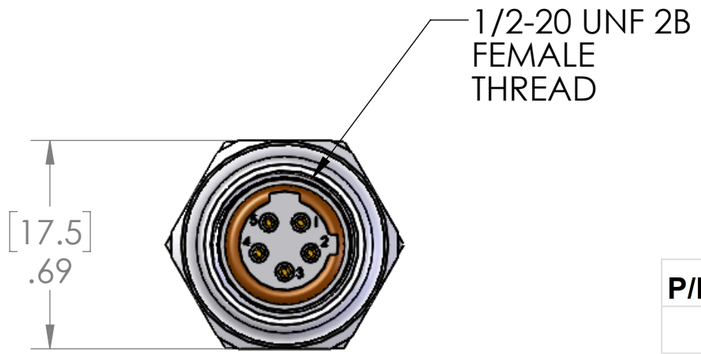


| P/N | L |
|---|---|
| | |
| MAC-5FR-4 | 12" [0.3m] |
| MAC-5FR-4-0.5M | 20" [0.5m] |
| MAC-5FR-4-0.6M | 24" [0.6m] |
| MAC-5FR-4-1M | 40" [1.0m] |
| MAC-5FR-4-2M | 79" [2.0m] |
| MAC-5FR-4-3M | 118" [3.0m] |
| MAC-5FR-4-4M | 157" [4.0m] |
| MAC-5FR-4-5M | 193" [5.0m] |
| MAC-5FR-4-6M | 236" [6.0m] |

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

| MATERIALS | |
|---|---|
| SHELL: | NICKEL PLATED BRASS |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| WIRES: | |
| STYLE: | UL 1007/1569 |
| AWG: | 22 AWG |
| JACKET: | PVC |
| VOLTAGE: | 300V |
| INSERT: | POLYAMIDE |
| O-RING: | FPM |
| NUT: | ZINC PLATED STEEL |
| | |
| APPROVALS | |
| US: | UL LISTED |
| CANADA: | C-UL LISTED |
| ROHS: | YES |
| CE & UKCA: | YES |
| | |
| RATINGS | |
| PROTECTION CLASS: | UL TYPE 4 & 12, IEC IP69 |

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

| | |
|---|---|
| VOLTS | 300V |
| AMPS | 4A |
| TEMP: | 105°C |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | ADM |
| DRAWN DATE | 08/04/2023 |
| CHECKED BY | JJH |
| CHECK DATE | 08/07/2023 |

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MAC-5FR-4-ZZ | REV B

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1