FEMALE PIN #	WIRING	MALE PIN #
1	----------	1
2	----------	2
3	----------	3
4	----------	4
5	----------	5

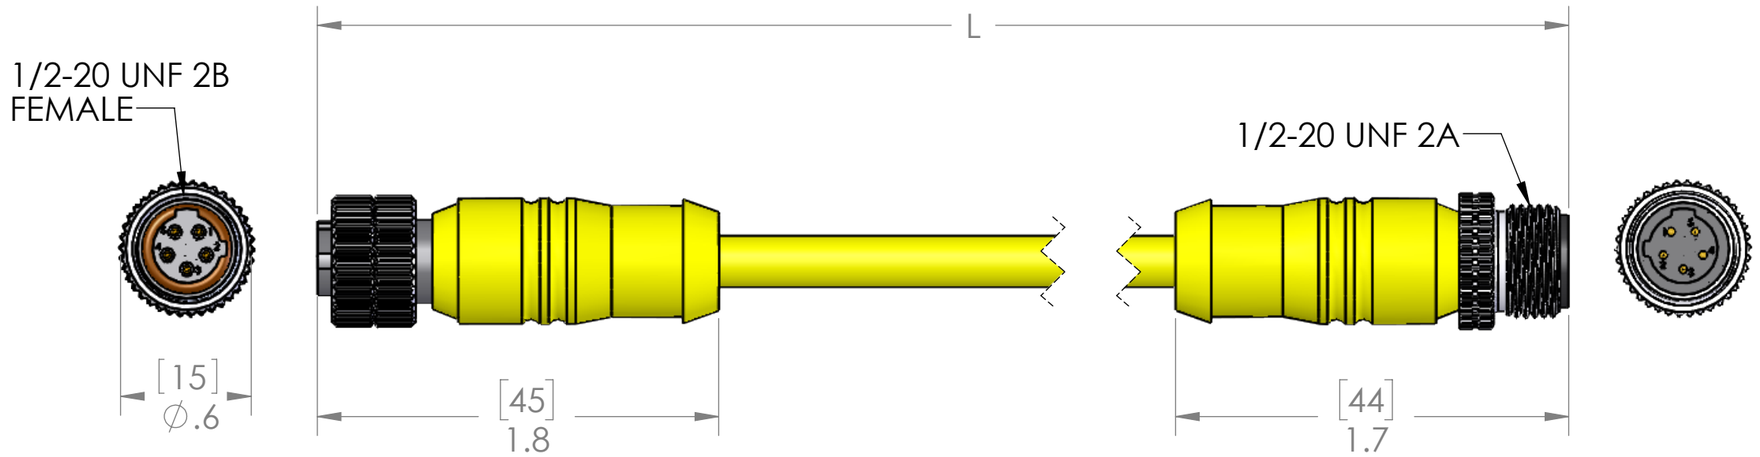

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

P/N	L	STD?
MAC-5MFP-1M	40" [1m]	YES
MAC-5MFP-2M	79" [2m]	YES
MAC-5MFP-3M	118" [3m]	NO
MAC-5MFP-4M	157" [4m]	NO
MAC-5MFP-5M	197" [5m]	YES
MAC-5MFP-6M	236" [6m]	NO
MAC-5MFP-10M	393" [10m]	YES
MAC-5MFP-15M	591" [15m]	YES
MAC-5MFP-20M	787" [20m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	08/03/2023
CHECKED BY	JJH
CHECK DATE	08/04/2023

COMMENTS:

MENCOM CORPORATION
TITLE:
SIZE B | DWG. NO. MAC-5MFP-ZZ | REV B
SCALE: 1.5:1 | WEIGHT: | SHEET 1 OF 1