
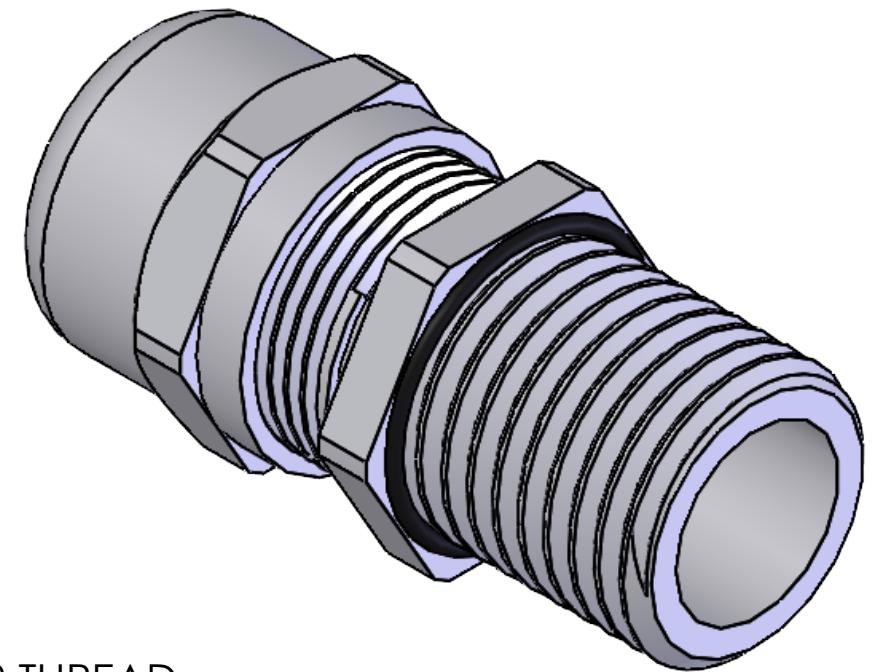
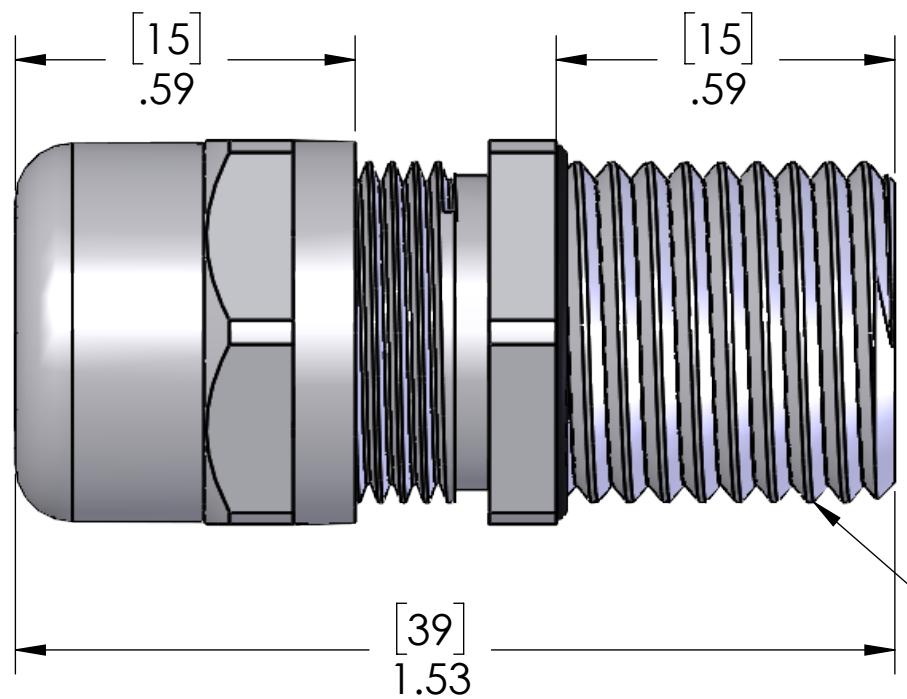


8 7 6 5 4 3 2 1

D

D

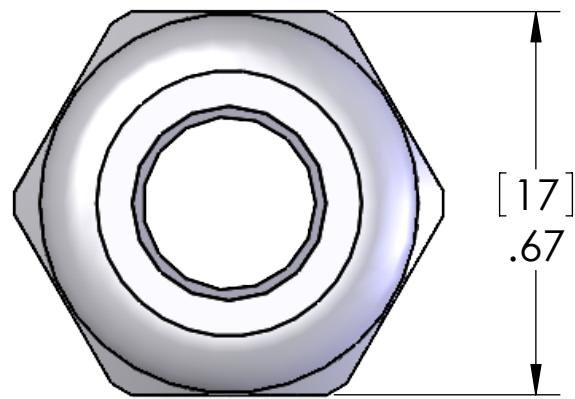

SEAL RATED TO: IP 68 - 5 BAR

LOCK NUT INCLUDED BUT NOT SHOWN

SPECIFICATIONS:

TIGHTENING TORQUE: 6.25 Nm

TEMPERATURE: -20°C - +100°C

MATERIALS:

BODY: NICKEL PLATED BRASS

INSERT: POLYAMIDE

GROMMET: NEOPRENE

LOCK NUT: NICKEL PLATED BRASS

O-RING: BUNA-N

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DRAWN BY

DCG

DRAWN DATE

06/03/2022

CHECKED BY

APR

CHECK DATE

06/03/2022