

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN NEW CAD	4/19/2016	


D

C


B

A


[69.8]
Ø 2.75

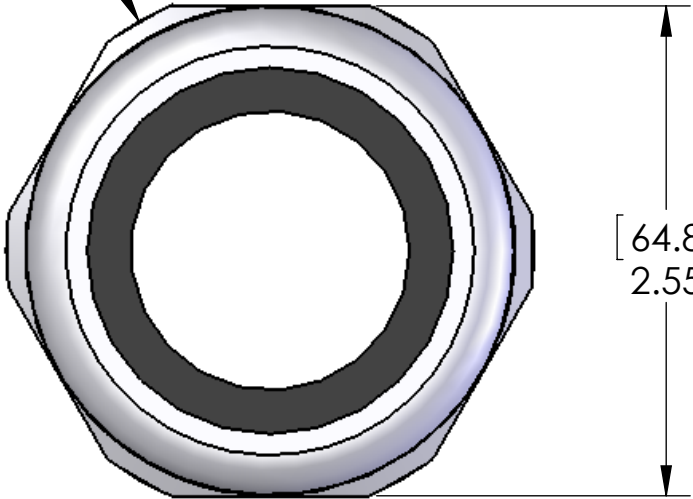

[64.8]
2.55

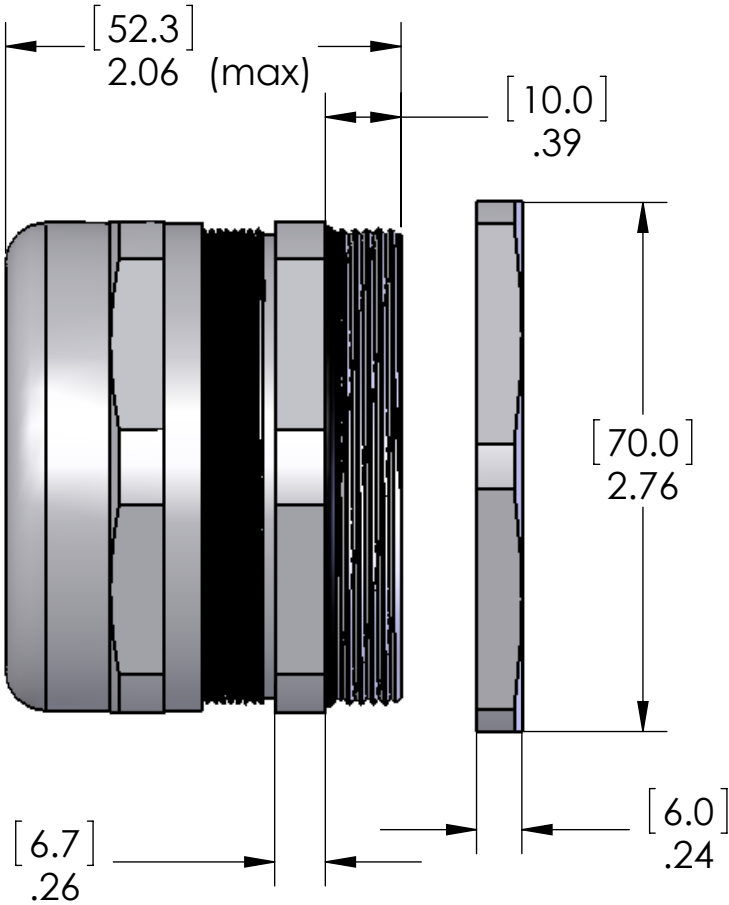

(VIEW WITH INCLUDED LOCKNUT)

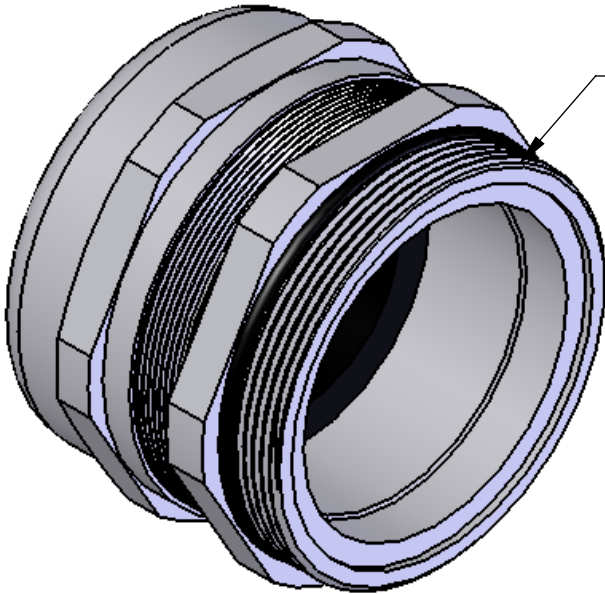

M63x1.5

D

C

B

A

SPECIFICATIONS:	
SEAL RATING:	IP68-5bar / IP69K
SEALING/CLAMPING RANGE:	27.0 - 48.0mm
TIGHTENING TORQUE:	13.5 Nm
TEMPERATURE:	-20°C - +100°C

MATERIALS:	
BODY:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
GROMMET:	NEOPRENE
LOCK NUT:	NICKEL PLATED BRASS
O-RING:	BUNA-N

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		NAME	MENCOM CORPORATION		
		DRAWN	TITLE: M63x1.5 CBL GLND		
		CHECKED			
		ENG APPR.			
		MFG APPR.			
MATERIAL		Q.A.	SIZE B		
FINISH		COMMENTS:			
DO NOT SCALE DRAWING		SCALE: 1:1		WEIGHT:	SHEET 1 OF 1
		DWG. NO. MCG-M63		REV A	