




REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	12/2/2004	
B	TABLE ADDED	6/1/2006	

D

C

B

A

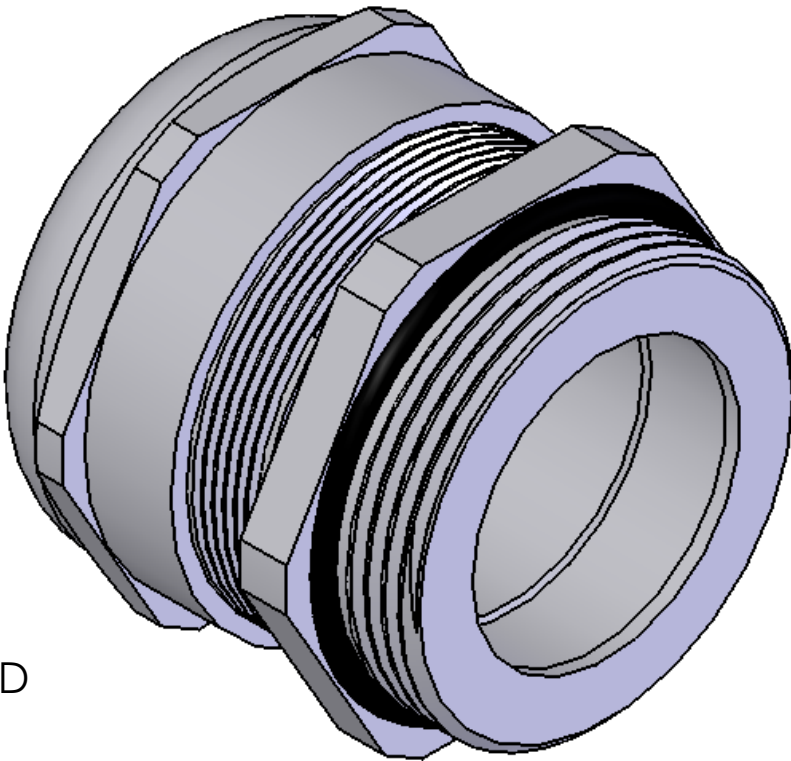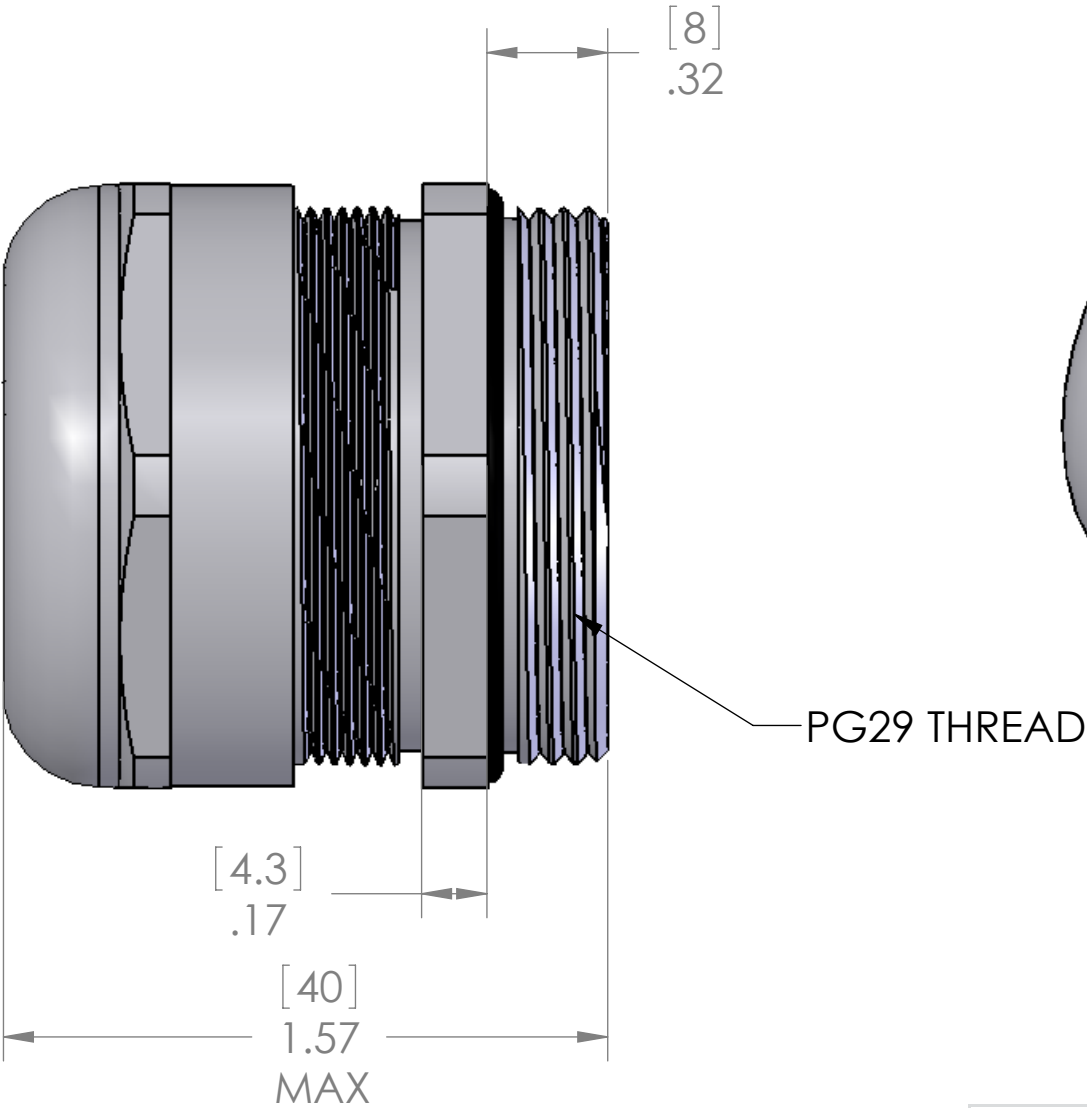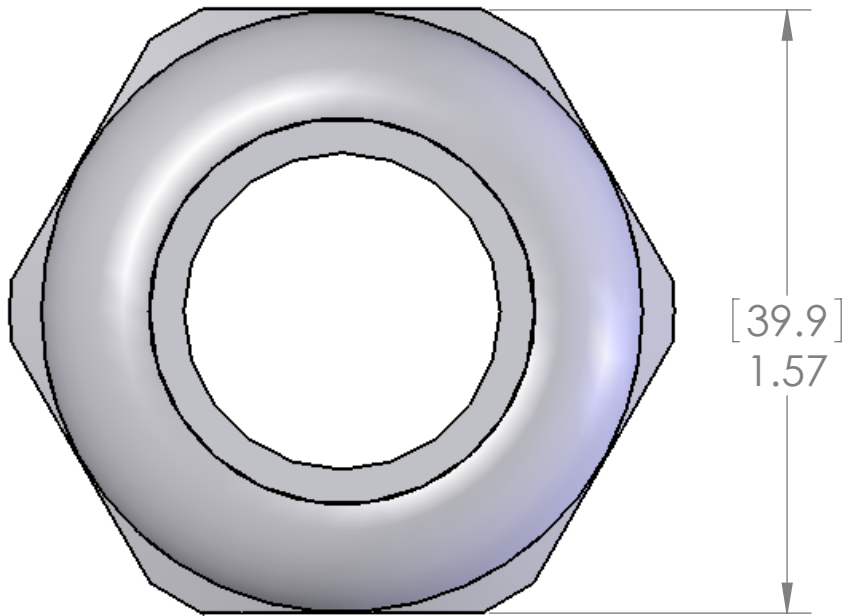

D

C

B

A

SPECIFICATIONS:	(B)
TIGHTENING TORQUE:	10 Nm
TEMPERATURE:	-20°C - +100°C

MATERIALS:	
BODY:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
GROMMET:	NEOPRENE
LOCK NUT:	NICKEL PLATED BRASS
O-RING:	BUNA-N

LOCK NUT INCLUDED BUT NOT SHOWN

SEAL RATED AT IP 68

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

PART NUMBER	SEALING RANGE
MCGB-29	0.709" - 0.984" [18 - 25MM]
MCGB-29R	0.472" - 0.787" [12 - 20MM]

		UNLESS OTHERWISE SPECIFIED:	NAME	MENCOM CORPORATION			
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	TITLE:		
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.				
		MATERIAL	COMMENTS:		SIZE	DWG. NO.	REV
		FINISH			B	MCGB-29	B
		DO NOT SCALE DRAWING			SCALE: 2:1	WEIGHT:	SHEET 1 OF 1