


PIN #	COLOR	PIN #	COLOR
1	VIOLET	11	BLACK
2	RED	12	GREEN / YELLOW
3	GRAY	13	YELLOW w/BROWN
4	RED w/BLUE	14	BROWN w/GREEN
5	GREEN	15	WHITE
6	BLUE	16	YELLOW
7	GRAY w/PINK	17	PINK
8	WHITE w/GREEN	18	GRAY w/BROWN
9	WHITE w/YELLOW	19	BROWN
10	WHITE w/GRAY		

BLUE, BROWN &
GREEN/YELLOW ARE 18AWG

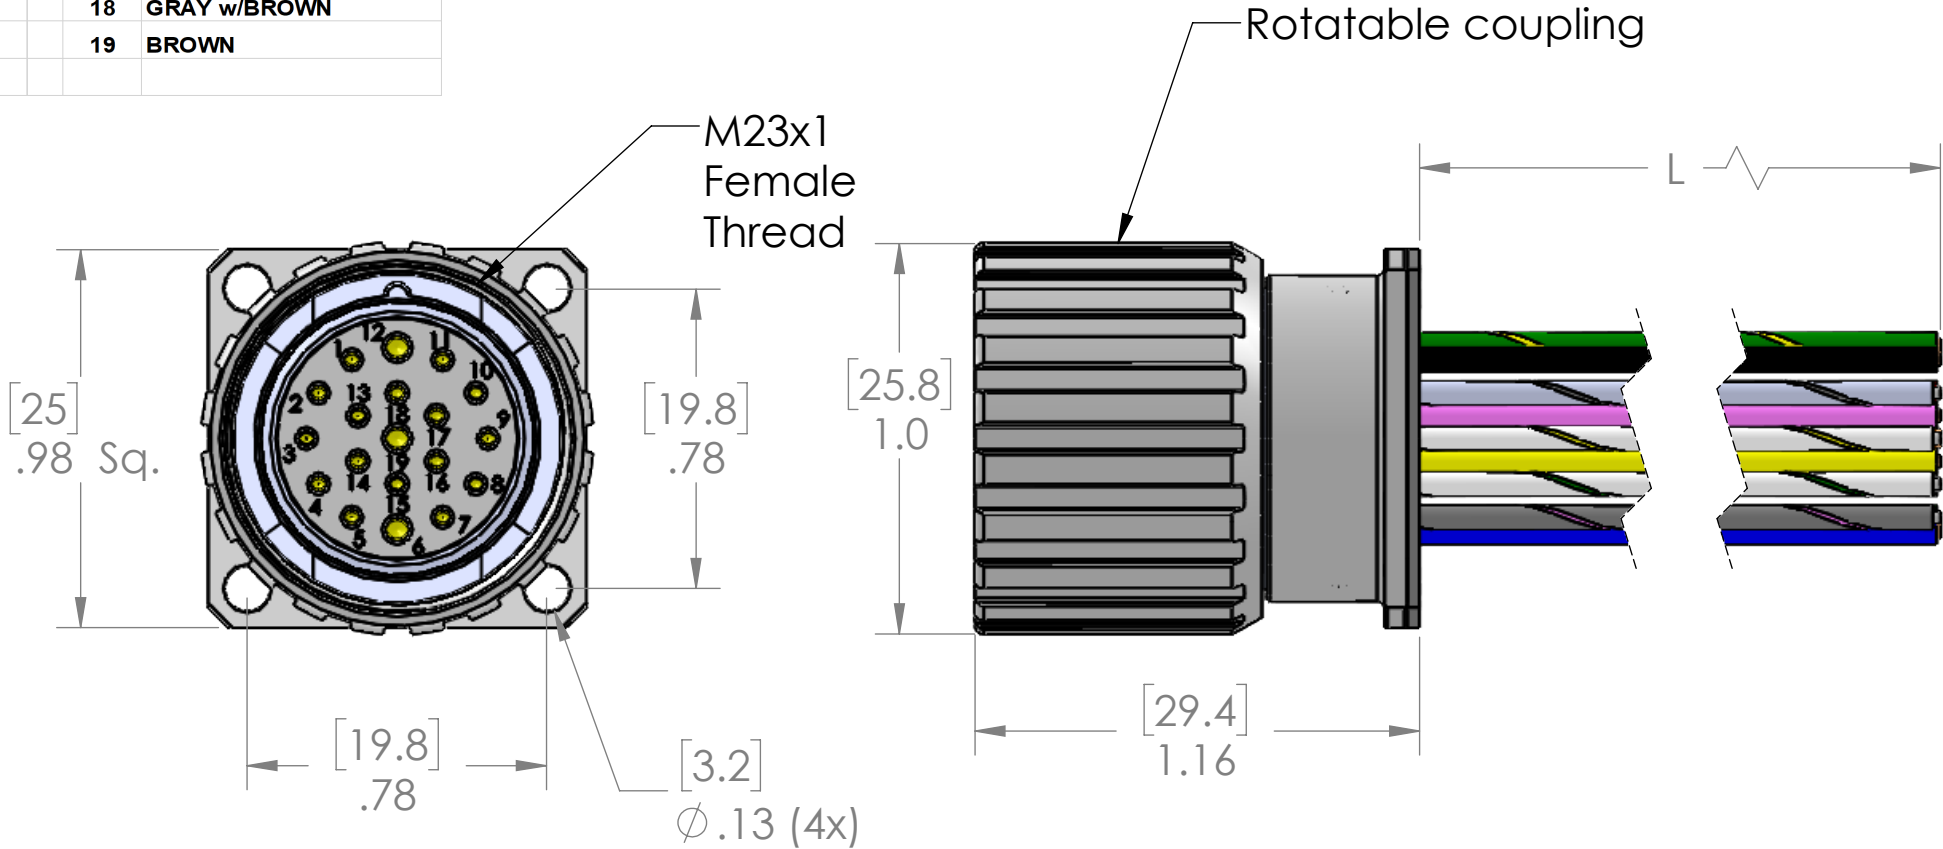

MATERIALS	
SHELL:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 & 22 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	PBT
O-RING:	NBR
GASKET:	NBR
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	IEC IP69

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 6 & 19	150V, 10A
ALL OTHERS	150V, 1A
OR	
PIN 12	GROUND
PINS 6 & 19	150V, 9A
ALL OTHERS	150V, 2A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	150V
AMPS	SEE TABLE
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	08/30/2023
	CHECKED BY	JJH
	CHECK DATE	08/31/2023
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

TABLE A	
P/N	L
MCV-19FRF-0.3M-PM32	12" [0.3M]
MCV-19FRF-0.5M-PM32	20" [0.5M]
MCV-19FRF-0.6M-PM32	24" [0.6M]
MCV-19FRF-1M-PM32	40" [1M]
MCV-19FRF-2M-PM32	79" [2M]
MCV-19FRF-3M-PM32	118" [3M]
MCV-19FRF-5M-PM32	197" [5M]
MCV-19FRF-10M-PM32	393" [10M]

OTHER LENGTHS AVAILABLE
CONSULT FACTORY

MENCOM CORPORATION

TITLE:		
SIZE	DWG. NO.	REV
B	MCV-19FRF-ZZ-PM32	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1