

PIN #	WIRING	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
	ETC.	
19	-----	19

PINS 6, 12 & 19 ARE 18AWG.
ALL OTHERS ARE 22AWG

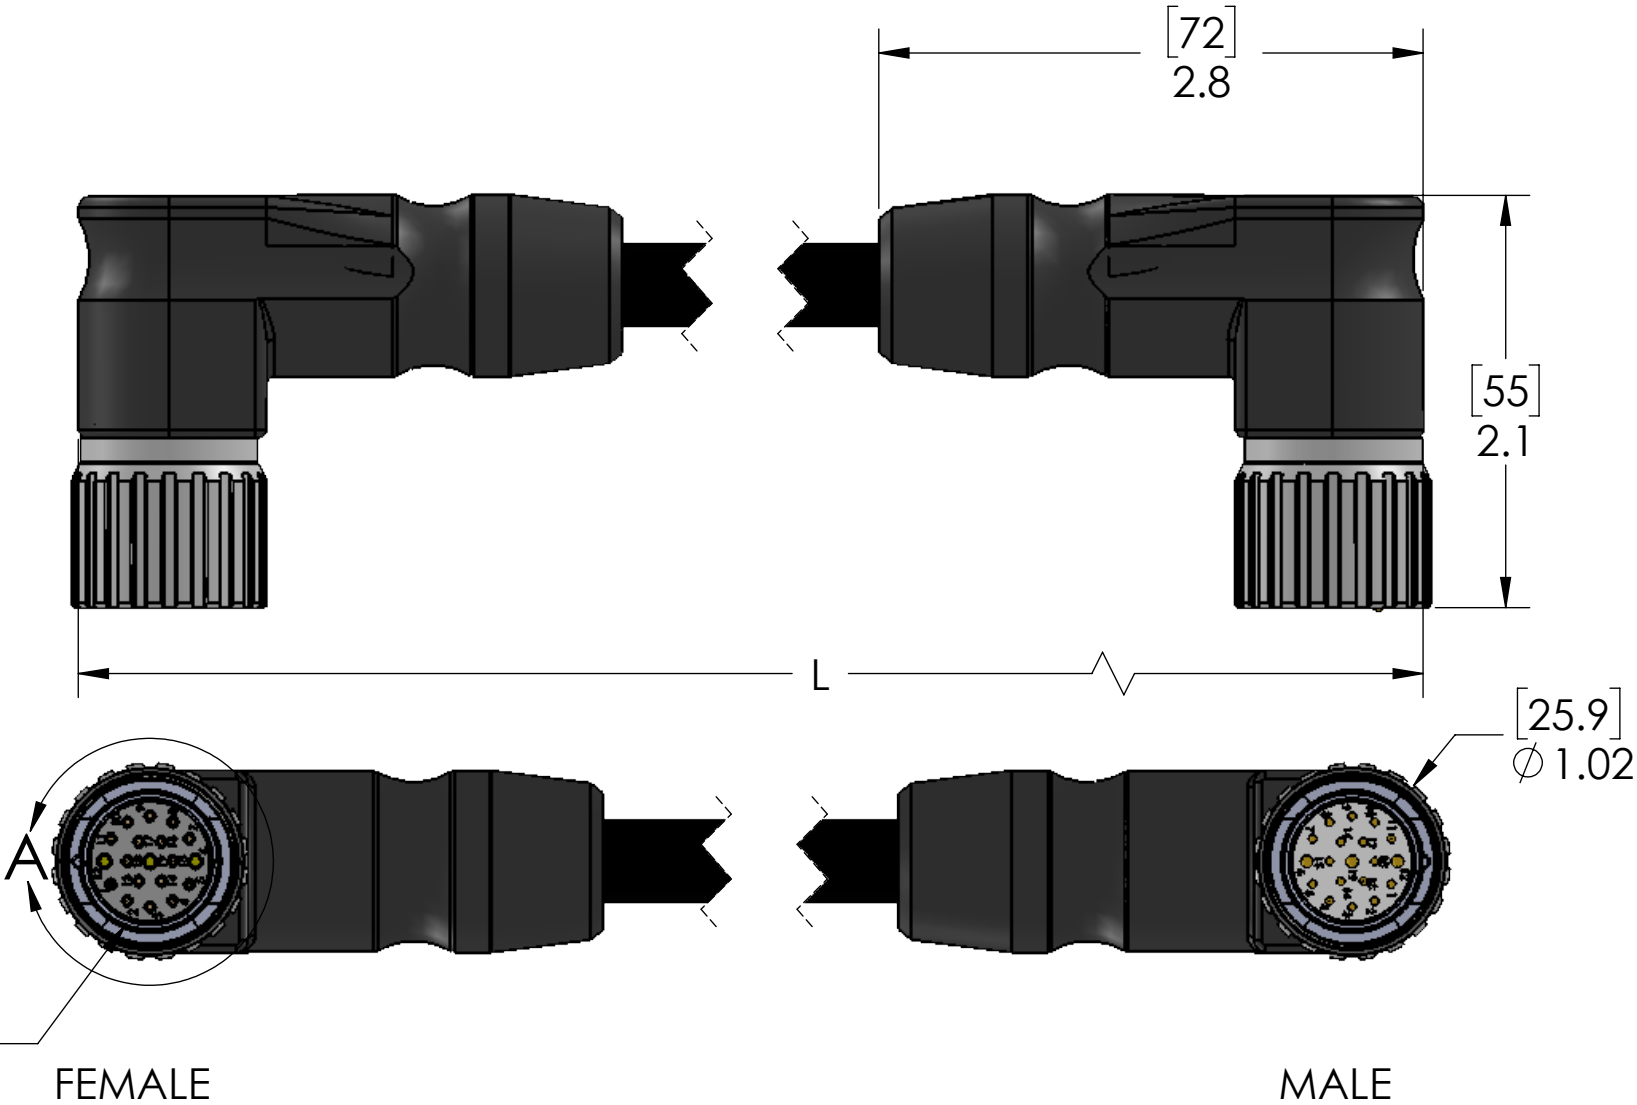
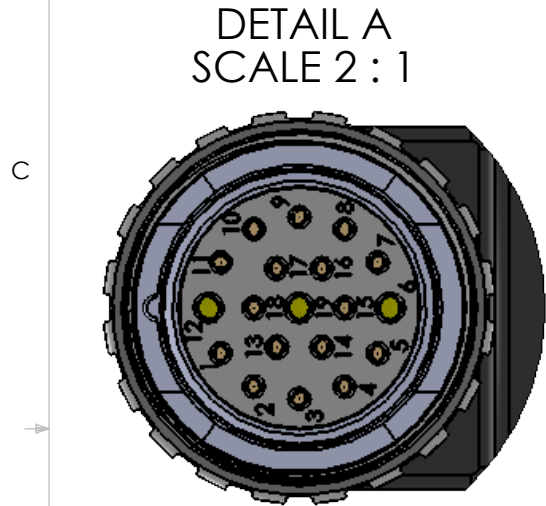


TABLE A		
P/N	L	STD?
MCVP-19MFP-1M-R	40" [1m]	YES
MCVP-19MFP-2M-R	79" [2m]	YES
MCVP-19MFP-3M-R	118" [3m]	NO
MCVP-19MFP-4M-R	157" [4m]	NO
MCVP-19MFP-5M-R	197" [5m]	YES
MCVP-19MFP-6M-R	236" [6m]	NO
MCVP-19MFP-8M-R	315" [8m]	NO
MCVP-19MFP-10M-R	393" [10m]	YES
MCVP-19MFP-15M-R	590" [15m]	YES
MCVP-19MFP-20M-R	786" [20m]	NO

LENGTHS THAT ARE NOT LISTED AS
STANDARD MAY REQUIRE MINIMUM ORDERS

MATERIALS:	
BODY:	BLACK PUR
INSERT:	PBT
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLINGS:	NICKEL PLATED BRASS
O-RINGS:	NBR
CABLE:	18/3, 22/16 AWM PUR JACKET w/FOIL SHIELD
APPROVALS:	
US:	UL LISTED
CANADA:	C-UL LISTED

Please note that to better
serve the varying needs of
our customers, these
parts have been UL
tested for two different
amperage ratings as
shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 6 & 19	150V, 10A
ALL OTHERS	150V, 1A
OR	
PIN 12	GROUND
PINS 6 & 19	150V, 9A
ALL OTHERS	150V, 2A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	150V
AMPS	10A/1A OR 9A/2A
TEMP:	80°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	09/22/2016
	CHECKED BY	
	CHECK DATE	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 19 PL M-F EXT CBL R/A		
SIZE B	DWG. NO. MCVP-19MFP-ZZ-R	REV B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1