

WIRING TABLE	
1-1	11-11
2-2	12-12
3-3	13-13
4-4	14-14
5-5	15-15
6-6	16-16
7-7	17-17
8-8	18-18
9-9	19-19
10-10	

PINS 6, 12 & 19 ARE 18AWG.  
ALL OTHERS ARE 22AWG

DETAIL B  
SCALE 2 : 1

DETAIL A  
SCALE 2 : 1

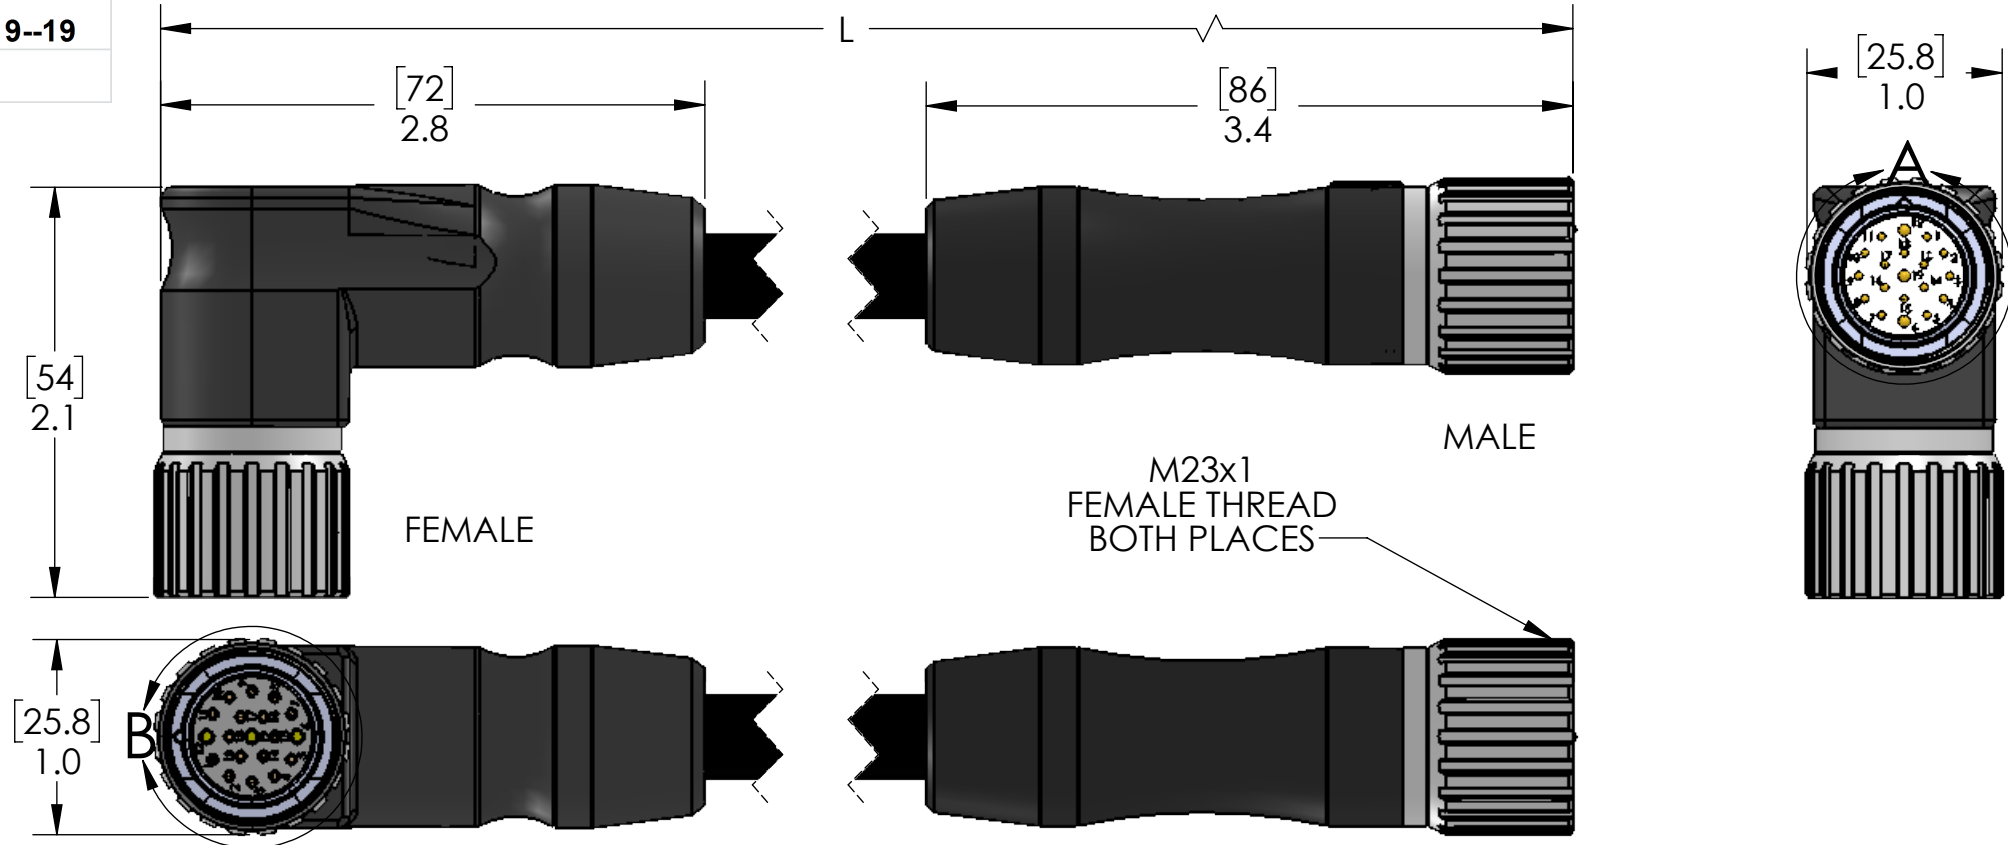
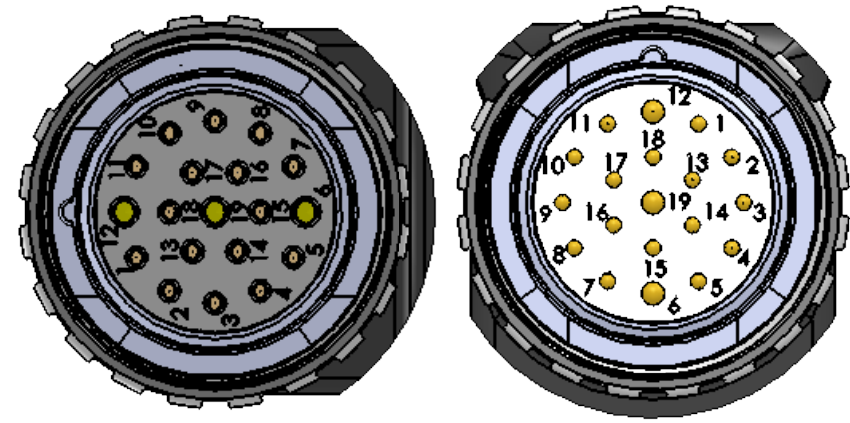


TABLE A		
P/N	L	STD?
MCVP-19MFRP-0.3M	12" [0.3m]	NO
MCVP-19MFRP-0.5M	20" [0.5m]	NO
MCVP-19MFRP-1M	40" [1m]	YES
MCVP-19MFRP-2M	79" [2m]	YES
MCVP-19MFRP-3M	118" [3m]	NO
MCVP-19MFRP-4M	157" [4m]	NO
MCVP-19MFRP-5M	197" [5m]	YES
MCVP-19MFRP-6M	236" [6m]	NO
MCVP-19MFRP-8M	315" [8m]	NO
MCVP-19MFRP-10M	393" [10m]	YES
MCVP-19MFRP-15M	590" [15m]	YES
MCVP-19MFRP-20M	786" [20m]	NO
MCVP-19MFRP-30M	1188" [30m]	NO
MCVP-19MFRP-40M	1575" [40m]	NO
MCVP-19MFRP-50M	1965" [50m]	NO

LENGTHS THAT ARE NOT LISTED AS STANDARD MAY REQUIRE MINIMUM ORDERS

<b>MATERIALS:</b>	
<b>BODY:</b>	BLACK PUR
<b>INSERT:</b>	PBT
<b>CONTACTS:</b>	GOLD PLATED COPPER ALLOY
<b>COUPLINGS:</b>	NICKEL PLATED BRASS
<b>O-RINGS:</b>	NBR
<b>CABLE:</b>	18/3, 22/16 AWM PUR JACKET w/FOIL SHIELD
<b>APPROVALS:</b>	
<b>US:</b>	UL LISTED
<b>CANADA:</b>	C-UL LISTED

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 6 & 19	150V, 10A
ALL OTHERS	150V, 1A
<b>OR</b>	
PIN 12	GROUND
PINS 6 & 19	150V, 9A
ALL OTHERS	150V, 2A

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	09/22/2016
	CHECKED BY	
	CHECK DATE	
COMMENTS:		
DO NOT SCALE DRAWING		

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	150V
AMPS	10A/1A OR 9A/2A
TEMP:	80°C

MENCOM CORPORATION		
TITLE: 19 PL M-F EXT CBL, FEM RA		
SIZE	DWG. NO.	REV
<b>B</b>	MCVP-19MFRP-ZZ	<b>B</b>
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1