

PIN #	WIRING	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
	ETC.	
19	-----	19

PINS 6, 12 & 19 ARE 18AWG.
ALL OTHERS ARE 22AWG

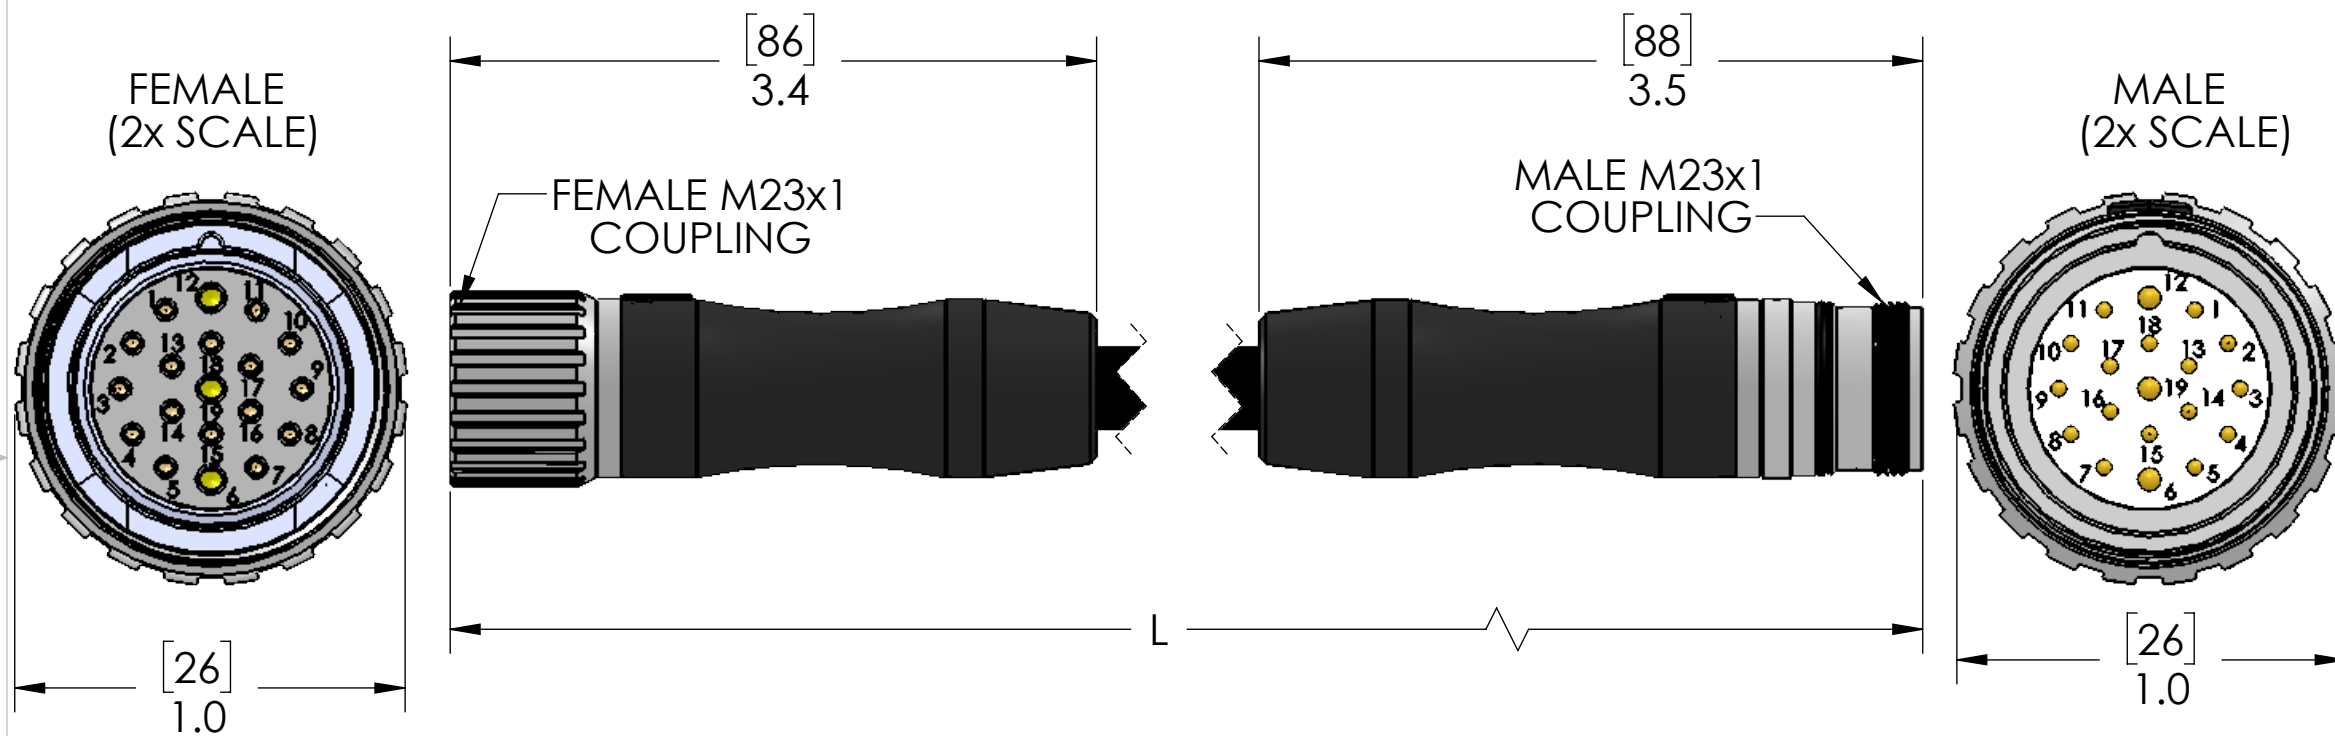


TABLE A		
P/N	L	STD?
MCVP-19MMFP-1M	40" [1m]	YES
MCVP-19MMFP-2M	79" [2m]	YES
MCVP-19MMFP-3M	118" [3m]	NO
MCVP-19MMFP-4M	157" [4m]	NO
MCVP-19MMFP-5M	197" [5m]	YES
MCVP-19MMFP-6M	236" [6m]	NO
MCVP-19MMFP-8M	315" [8m]	NO
MCVP-19MMFP-10M	393" [10m]	YES
MCVP-19MMFP-15M	590" [15m]	YES
MCVP-19MMFP-20M	786" [20m]	YES

LENGTHS THAT ARE NOT LISTED AS STANDARD MAY REQUIRE MINIMUM ORDERS

MATERIALS:	
BODY:	BLACK PUR
INSERT:	PBT
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLINGS:	NICKEL PLATED BRASS
O-RINGS:	NBR
CABLE:	18/3, 22/16 AWM PUR JACKET w/FOIL SHIELD

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 6 & 19	150V, 10A
ALL OTHERS	150V, 1A
OR	
PIN 12	GROUND
PINS 6 & 19	150V, 9A
ALL OTHERS	150V, 2A

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	09/22/2016
	CHECKED BY	
	CHECK DATE	
MATERIAL		COMMENTS:
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 19 PL M-F EXT		
SIZE	DWG. NO.	REV
B	MCVP-19MMFP-ZZ	B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	150V
AMPS	10A/1A OR 9A/2A
TEMP:	80°C