


PIN #	WIRING	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
	ETC.	
19	-----	19

PINS 6, 12 & 19 ARE 18AWG.
ALL OTHERS ARE 22AWG

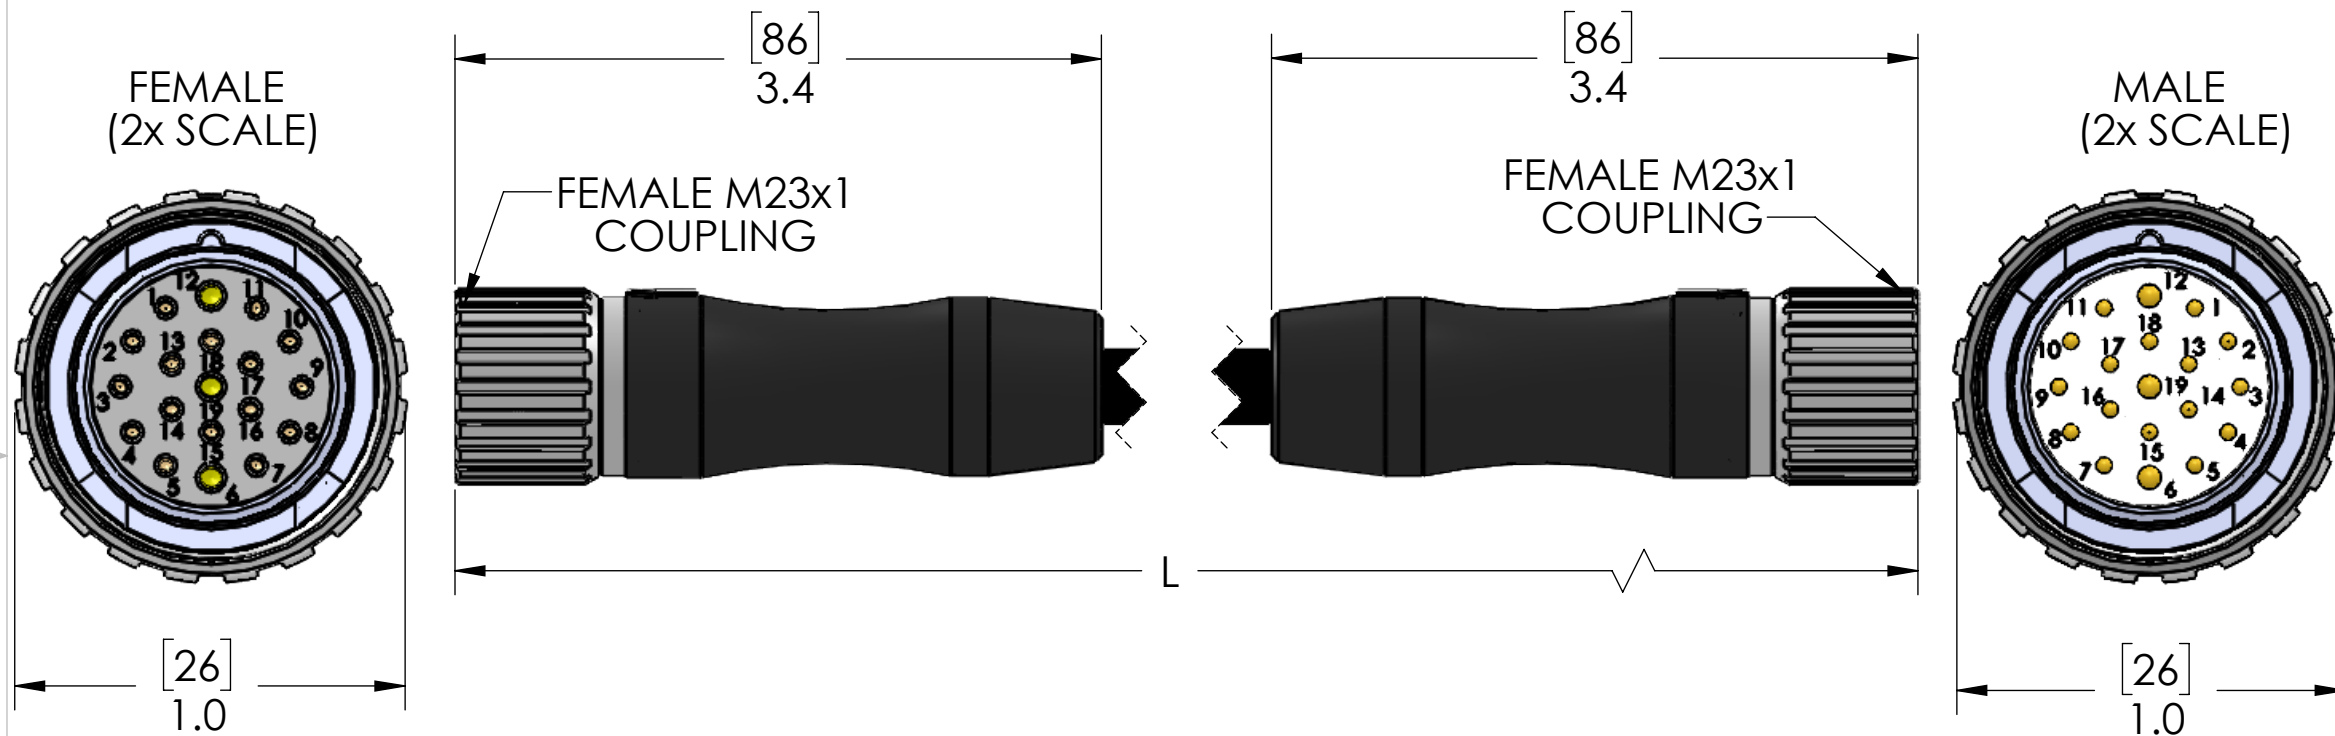

P/N	L	STD?
MCVW-19MFP-1M	40" [1m]	YES
MCVW-19MFP-2M	79" [2m]	YES
MCVW-19MFP-3M	118" [3m]	NO
MCVW-19MFP-4M	157" [4m]	NO
MCVW-19MFP-5M	197" [5m]	YES
MCVW-19MFP-6M	236" [6m]	NO
MCVW-19MFP-7M	276" [7m]	NO
MCVW-19MFP-8M	315" [8m]	NO
MCVW-19MFP-10M	393" [10m]	YES
MCVW-19MFP-15M	590" [15m]	YES
MCVW-19MFP-20M	786" [20m]	YES

BODY:	BLACK PUR
INSERT:	PBT
CONTACTS:	GOLD PLATED COPPER ALLOY
SHELL:	NICKEL PLATED BRASS
O-RINGS:	NBR
CABLE:	18/3, 22/16 HI-FLEX BLACK TPE
APPROVALS:	
US:	UL LISTED
CANADA:	C-UL LISTED

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 6 & 19	150V, 10A
ALL OTHERS	150V, 1A
OR	
PIN 12	GROUND
PINS 6 & 19	150V, 9A
ALL OTHERS	150V, 2A

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	05/16/2019
	CHECKED BY	DWM
	CHECK DATE	05/16/2019
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

LENGTHS THAT ARE NOT LISTED AS STANDARD MAY REQUIRE MINIMUM ORDERS

MENCOM CORPORATION

TITLE:
19 PL M23 M-F TPE EXT CBL

SIZE	DWG. NO.	REV
B	MCVW-19MFP-ZZ	C
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.