

PIN #	WIRING	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
	ETC.	
19	-----	19

PINS 6, 12 & 19 ARE 18AWG.
ALL OTHERS ARE 22AWG

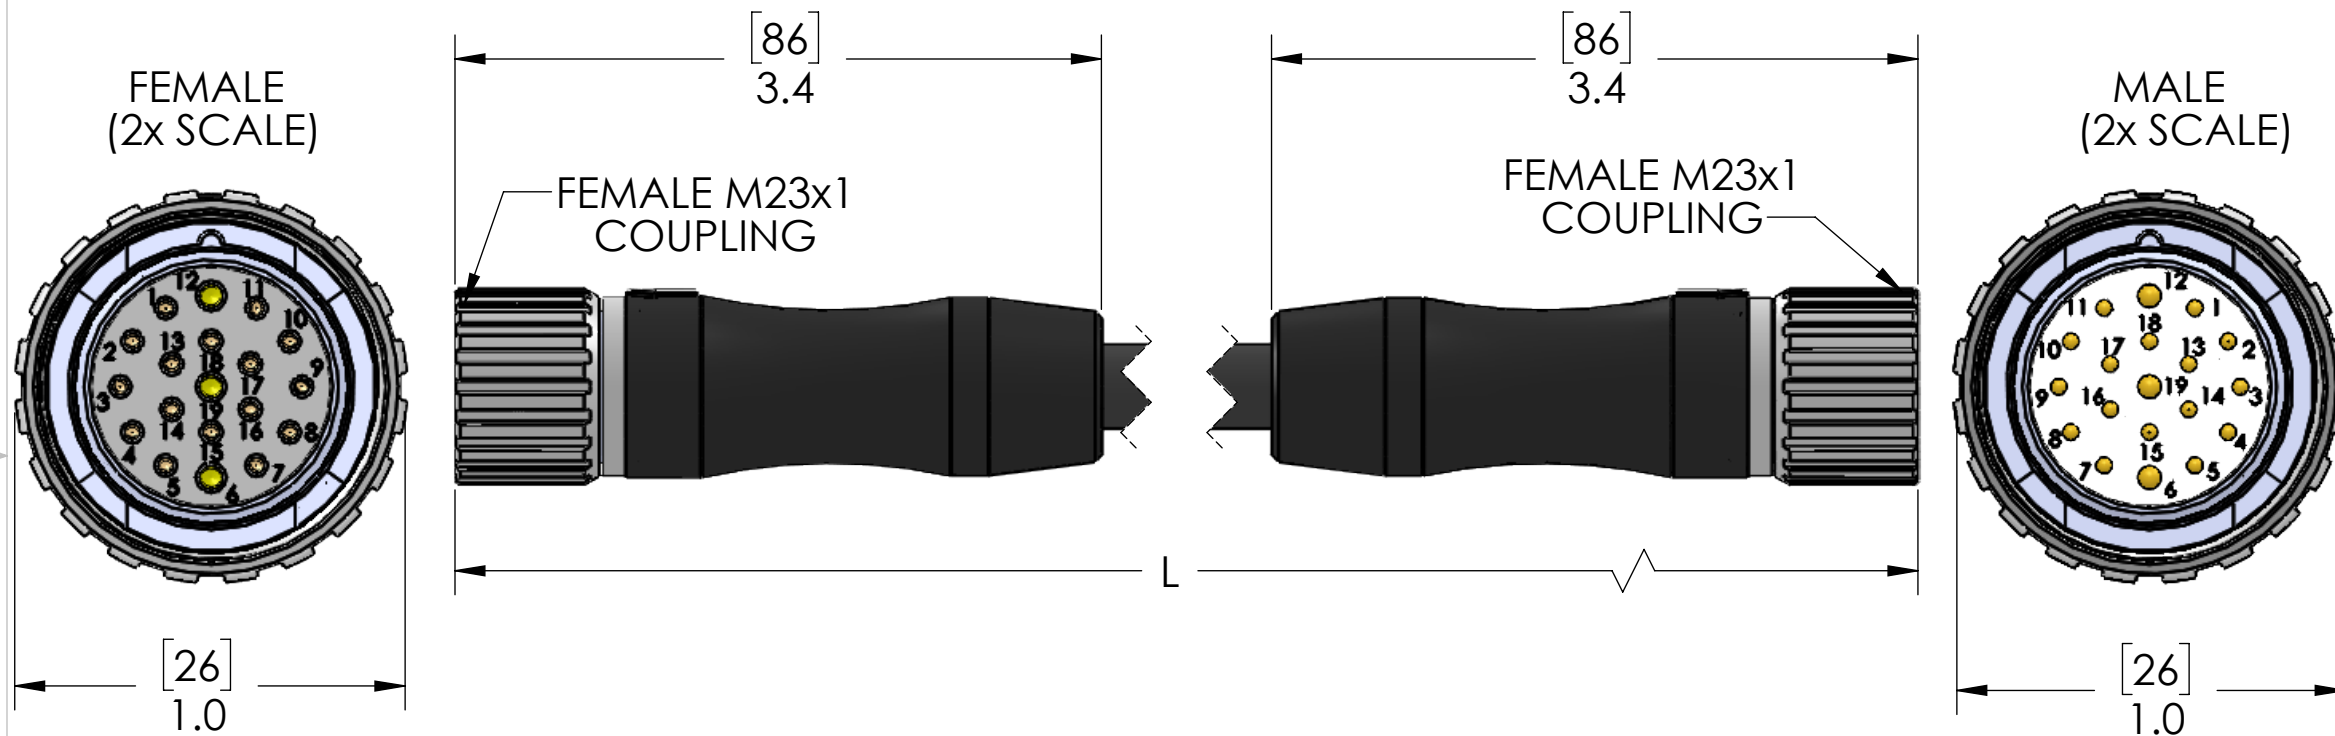


TABLE A		
P/N	L	STD?
MCVWF-19MFP-1M	40" [1m]	YES
MCVWF-19MFP-2M	79" [2m]	YES
MCVWF-19MFP-3M	118" [3m]	NO
MCVWF-19MFP-4M	157" [4m]	NO
MCVWF-19MFP-5M	197" [5m]	YES
MCVWF-19MFP-6M	236" [6m]	NO
MCVWF-19MFP-7M	276" [7m]	NO
MCVWF-19MFP-8M	315" [8m]	NO
MCVWF-19MFP-10M	393" [10m]	YES
MCVWF-19MFP-15M	590" [15m]	YES
MCVWF-19MFP-20M	786" [20m]	YES

LENGTHS THAT ARE NOT LISTED AS STD
MAY REQUIRE MINIMUM ORDERS

MATERIALS:	
BODY:	BLACK PUR
INSERT:	PBT
CONTACTS:	GOLD PLATED COPPER ALLOY
SHELL:	NICKEL PLATED BRASS
O-RINGS:	NBR
CABLE:	18/3, 22/16 HI-FLEX BLACK TPE
FLEXING:	10MM FLEX (MINIMUM BEND RADIUS OF 10X CABLE OD)
APPROVALS:	
US:	UL LISTED
CANADA:	C-UL LISTED

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 6 & 19	150V, 10A
ALL OTHERS	150V, 1A
OR	
PIN 12	GROUND
PINS 6 & 19	150V, 9A
ALL OTHERS	150V, 2A

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
DRAWN BY	ADM
DRAWN DATE	05/16/2019
CHECKED BY	DWM
CHECK DATE	05/16/2019
COMMENTS:	
DO NOT SCALE DRAWING	

MENCOM CORPORATION		
TITLE: 19 PL M23 M-F TPE EXT CBL		
SIZE	DWG. NO.	REV
B	MCVWF-19MFP-ZZ	B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	150V
AMPS	10A/1A OR 9A/2A
TEMP:	90°C