

PIN #	COLOR
1	NOT USED
2	NOT USED
3	BROWN
4	BLUE
5	NOT USED

D

D

C

C


B

B

MATERIALS	
SHELL:	STAINLESS STEEL
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	22/2
JACKET:	PVC
VOLTAGE:	300V
INSERT:	POLYAMIDE
O-RING:	FPM & NBR
NUT:	STAINLESS STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

A

A

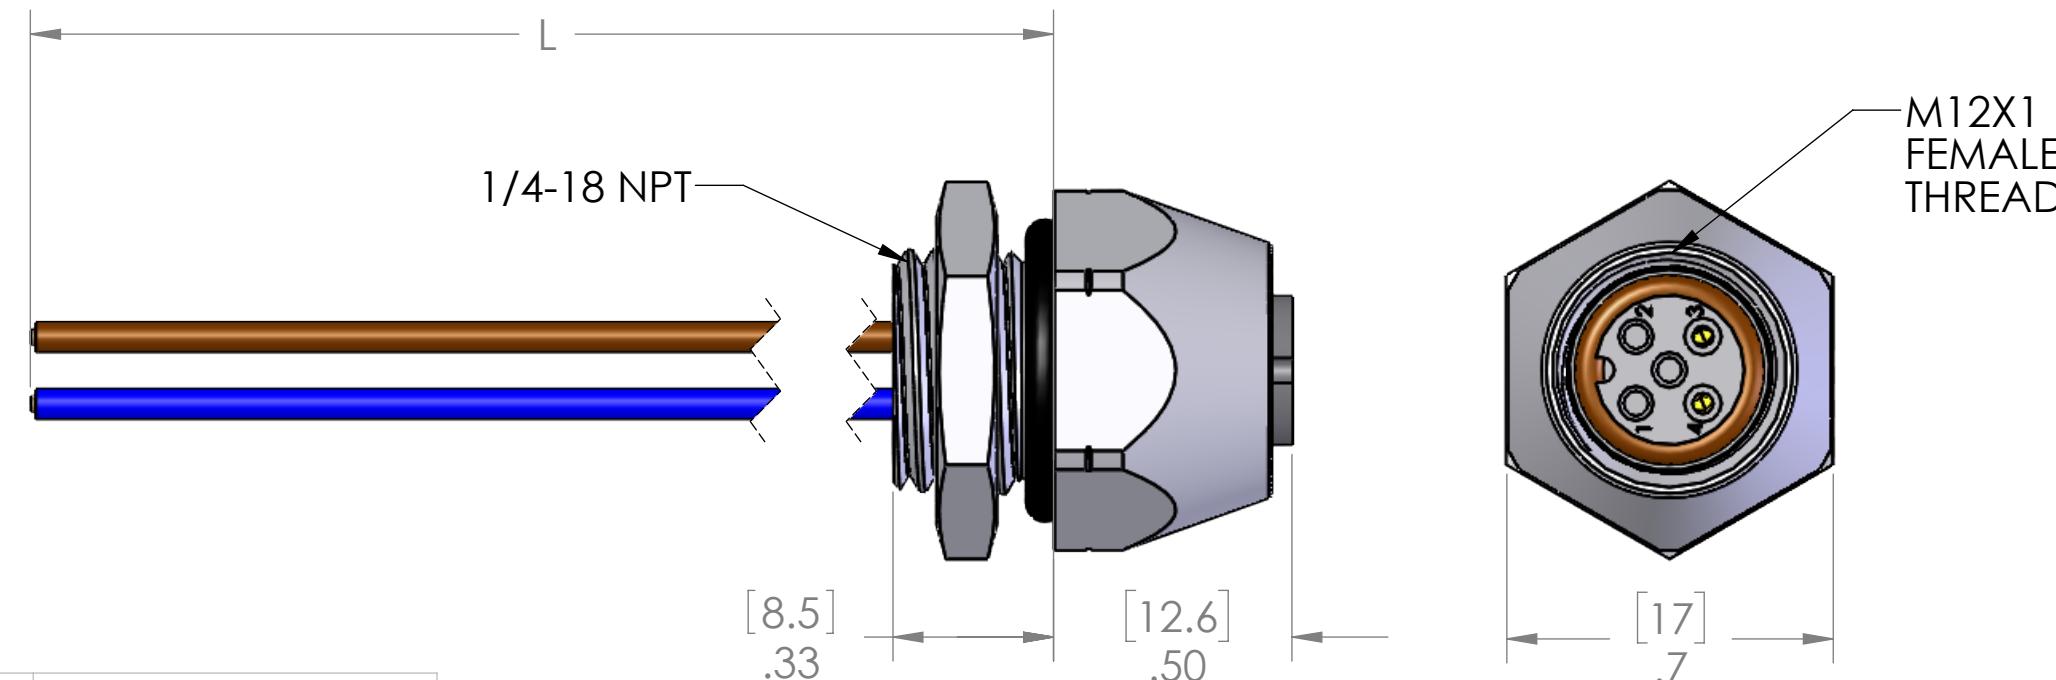

P/N	L
MDC-2FR-4-SS	12" [0.3m]
MDC-2FR-4-0.5M-SS	20" [0.5m]
MDC-2FR-4-1M-SS	40" [1m]
MDC-2FR-4-2M-SS	79" [2m]
MDC-2FR-4-3M-SS	118" [3m]
MDC-2FR-4-5M-SS	197" [5m]
MDC-2FR-4-10M-SS	393" [10m]

OTHER LENGTHS AVAILABLE
PLEASE CONSULT FACTORY

MENCOM CORPORATION

TITLE:
2 PL FM RECP 1/4" NPT

SIZE DWG. NO. REV
B MDC-2FR-4-ZZ-SS B
SCALE: 5:2 WEIGHT: SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	