| PIN # | COLOR |
|---|---|
| | |
| 1 | BROWN |
| 2 | NOT USED |
| 3 | BLUE |
| 4 | BLACK |
| 5 | NOT USED |

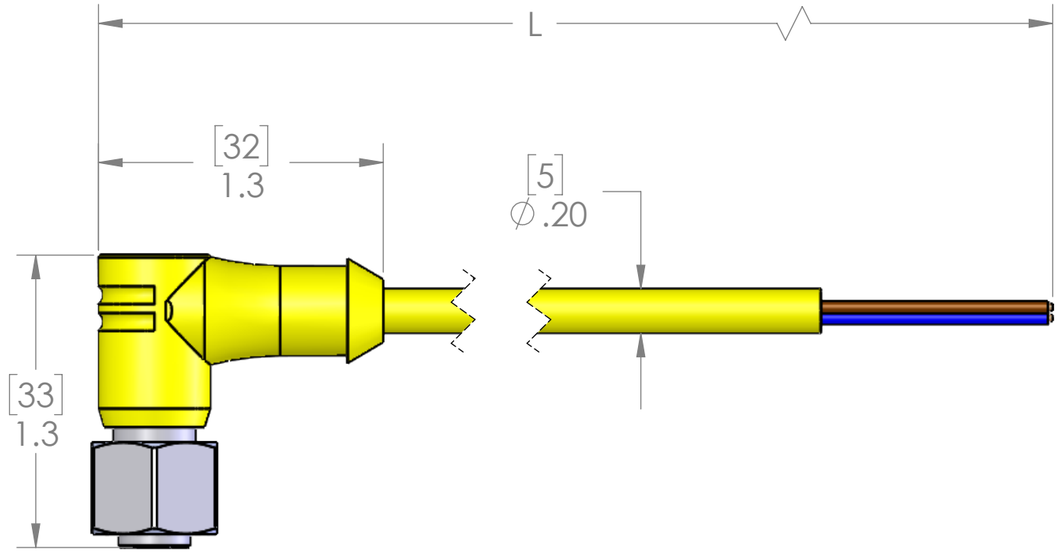


| P/N | L | STD? |
|---|---|---|
| MDC-3FP-1M-R-SS | 40" [1m] | YES |
| MDC-3FP-2M-R-SS | 79" [2m] | YES |
| MDC-3FP-3M-R-SS | 118" [3m] | YES |
| MDC-3FP-4M-R-SS | 157" [4m] | YES |
| MDC-3FP-5M-R-SS | 197" [5m] | YES |
| MDC-3FP-6M-R-SS | 236" [6m] | NO |
| MDC-3FP-8M-R-SS | 315" [8m] | NO |
| MDC-3FP-10M-R-SS | 393" [10m] | YES |
| MDC-3FP-15M-R-SS | 591" [15m] | NO |
| MDC-3FP-20M-R-SS | 787" [20m] | NO |
| MDC-3FP-30M-R-SS | 1181" [30m] | NO |
| MDC-3FP-50M-R-SS | 1968" [50m] | NO |

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

| MATERIALS | |
|---|---|
| BODY: | YELLOW PVC |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| CABLE: | |
| STYLE: | AWM |
| AWG: | 22/3 |
| JACKET: | YELLOW PVC |
| VOLTAGE: | 600V |
| SHIELD: | NO |
| COUPLING: | STAINLESS STEEL |
| INSERT: | POLYAMIDE |
| O-RING: | FPM |
| | |
| APPROVALS | |
| US: | UL LISTED |
| CANADA: | C-UL LISTED |
| ROHS: | YES |
| CE: | YES |
| | |
| RATINGS | |
| PROTECTION CLASS: | UL TYPE 4 & 12, IEC IP69 |


**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.


| | |
|---|---|
| VOLTS | 300V |
| AMPS | 4A |
| TEMP: | 105°C |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | GO |
| DRAWN DATE | 08/04/2021 |
| CHECKED BY | JJH |
| CHECK DATE | 08/04/2021 |

COMMENTS:

MENCOM CORPORATION

TITLE:

3 PL RA MDC FM PLG

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | MDC-3FP-ZZ-R-SS | B |

SCALE: 1.5:1 | WEIGHT: | SHEET 1 OF 1