

WIRING				
FEM #1		MALE		FEM #2
PIN 1	-----	PIN 1	-----	PIN 1
		PIN 2	-----	PIN 4
PIN 3	-----	PIN 3	-----	PIN 3
PIN 4	-----	PIN 4		

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/23/2011	

D

C

B

A

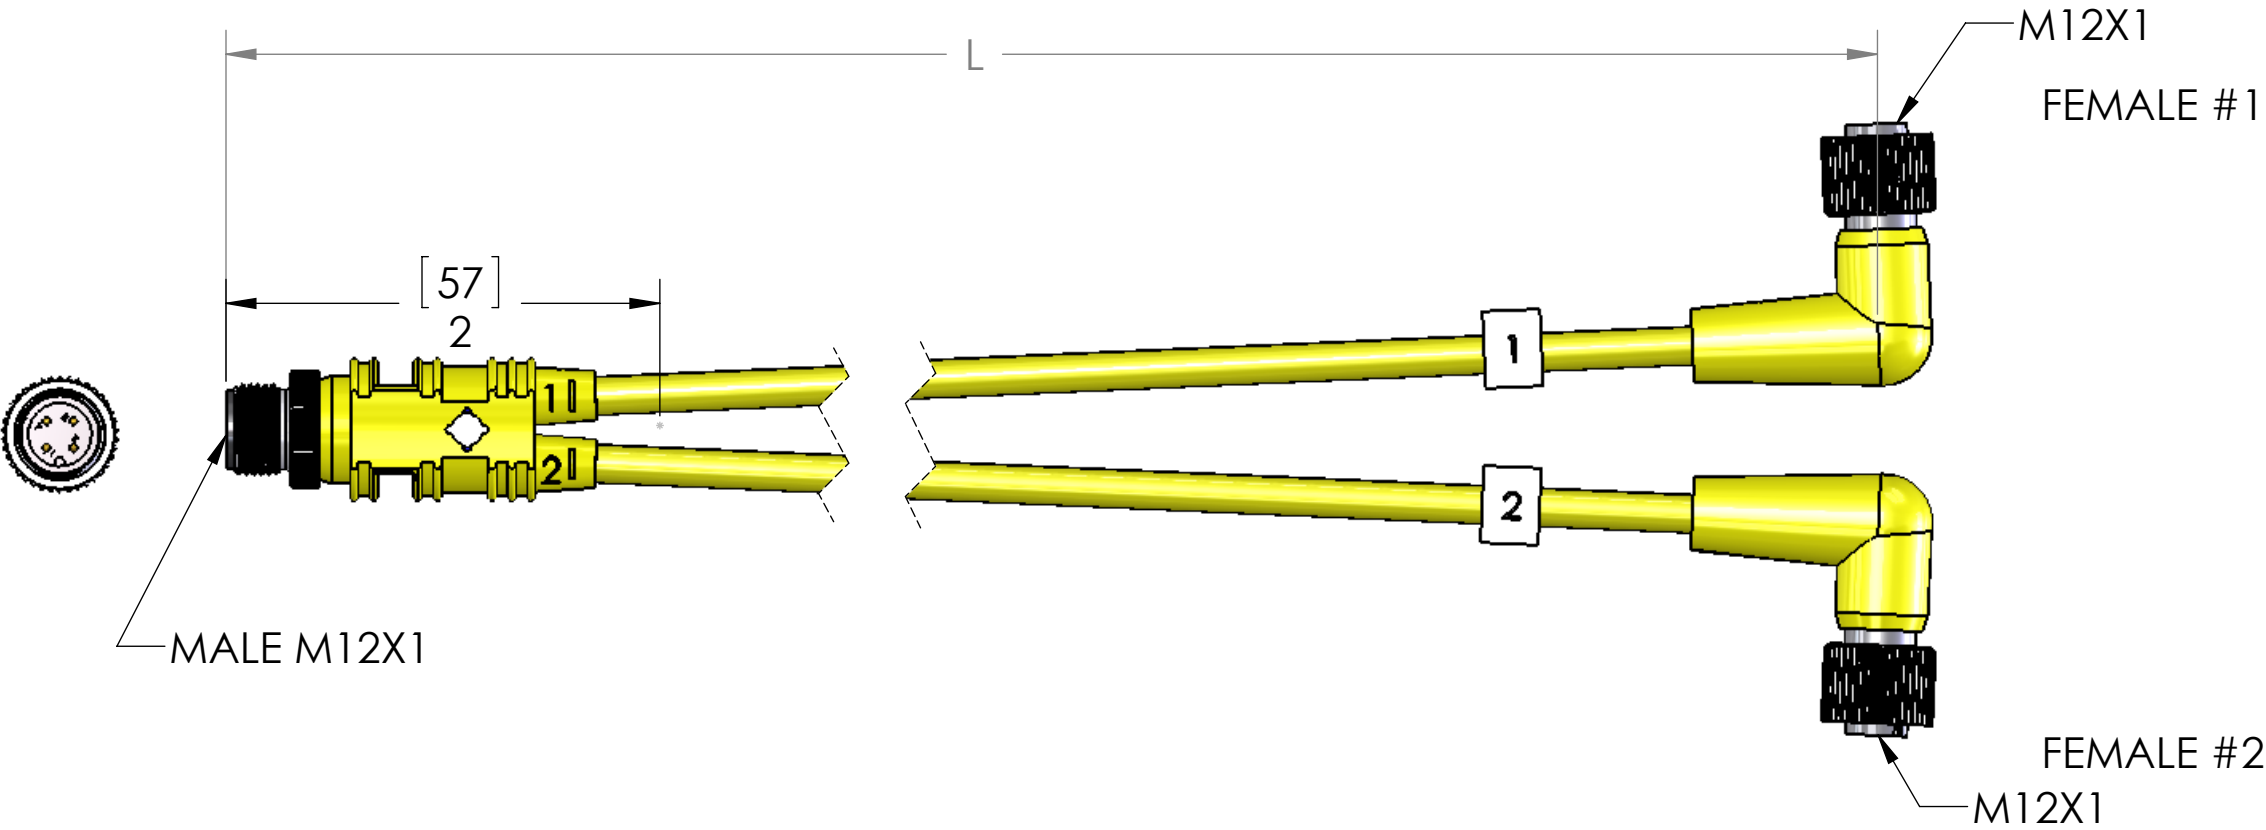


TABLE A	
P/N	L
MDC-3YFF-0.3M-R	12" [0.3m]
MDC-3YFF-0.5M-R	19" [0.5m]
MDC-3YFF-0.6M-R	24" [0.6m]
MDC-3YFF-1M-R	40" [1m]
MDC-3YFF-1.5M-R	59" [1.5m]
MDC-3YFF-2M-R	79" [2m]
MDC-3YFF-3M-R	118" [3m]
MDC-3YFF-4M-R	157" [4m]
MDC-3YFF-5M-R	197" [5m]
MDC-3YFF-6M-R	236" [6m]
MDC-3YFF-8M-R	315" [8m]
MDC-3YFF-10M-R	393" [10m]

MATERIALS	
BODIES:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	22/4 AWM 2661 YELLOW JACKET
COUPLINGS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
O-RINGS:	BUNA-N

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	2A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES & [MM]		DRAWN
		CHECKED
		ENG APPR.
		MFG APPR.
		Q.A.
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MDC-3YFF-ZZ-R	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

D

C

B

A