



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/9/2005	

M12x1
FEMALE
THREAD



[20.6]
.81

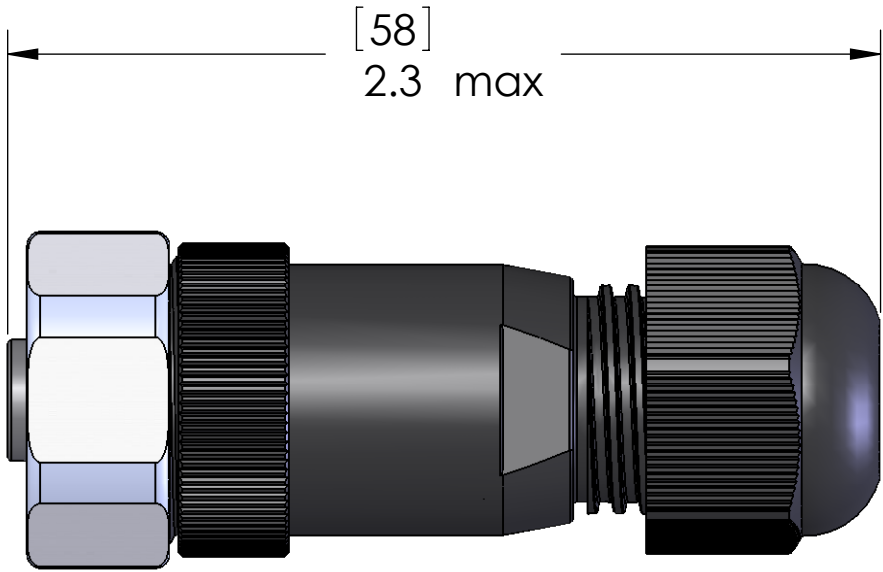

[58]
2.3 max

CABLE RANGE: 0.157" - 0.315" (4 - 8mm)

WIRES ARE TERMINATED VIA
SCREW TERMINALS

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	STAINLESS STEEL
INSERT:	POLYAMIDE

APPROVALS:	
U.S.:	UL RECOGNIZED
CANADA:	C-UL RECOGNIZED

SPECIFICATIONS:	
VOLTS:	250V
AMPS:	4A
SEALING:	IP67
WIRE RANGE:	18 - 24AWG (1.0 - 0.34sqmm)

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM
			CHECKED	
			ENG APPR.	
			MFG APPR.	
			Q.A.	
			COMMENTS:	
		MATERIAL		
		FINISH		
		DO NOT SCALE DRAWING		

MENCOM CORPORATION			
TITLE:			
SIZE	DWG. NO.	REV	
B	MDC-4FP-FW09-SS	A	
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1	