


PIN #	COLOR
1	BROWN
2	WHITE
3	BLUE
4	BLACK
5	NOT USED

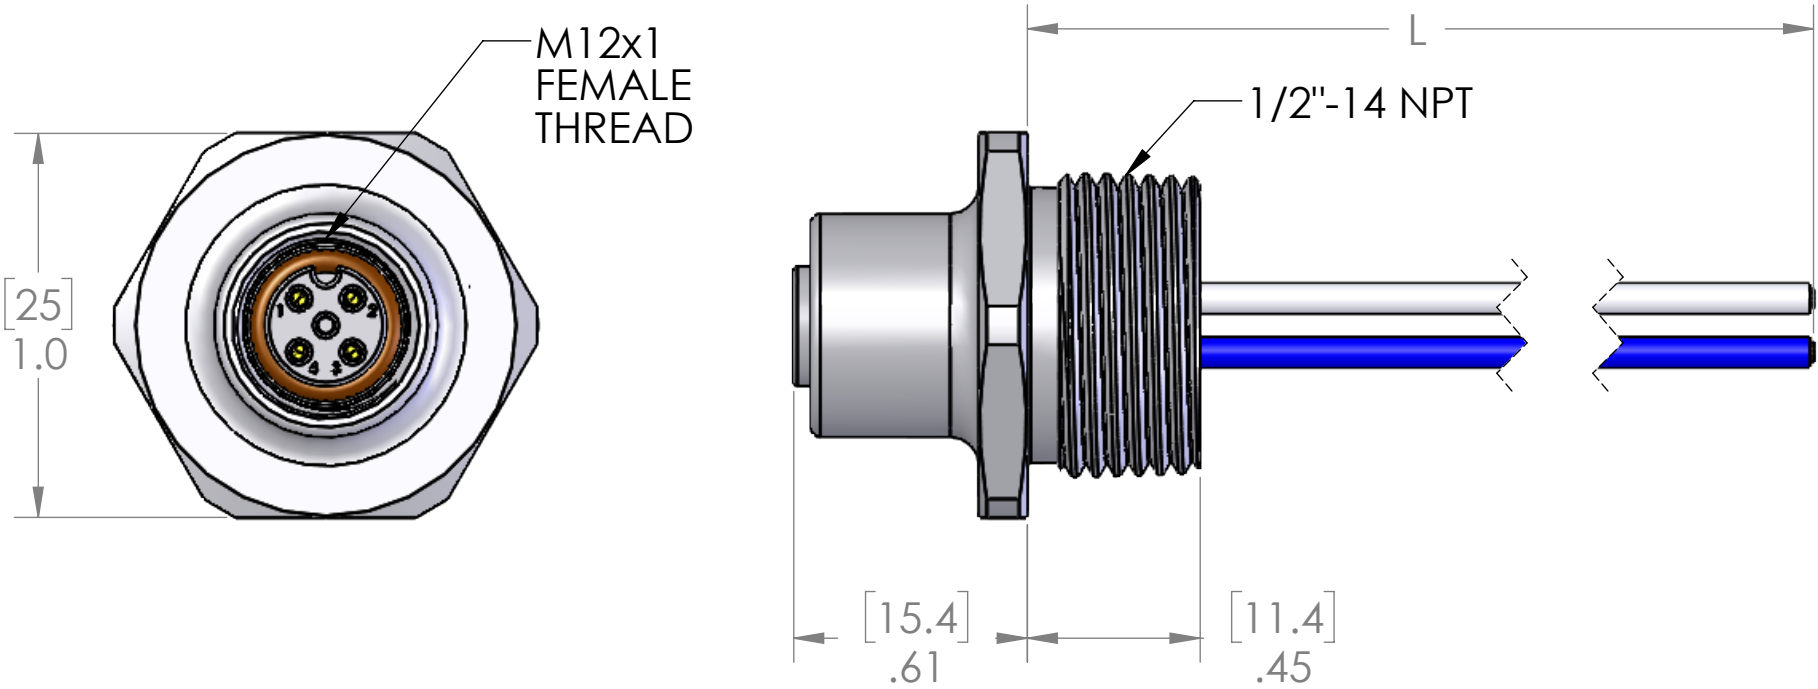

MATERIALS	
SHELL:	ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18/4
JACKET:	PVC
VOLTAGE:	300V
INSERT:	POLYAMIDE
O-RING:	NBR & FPM
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

AN O-RING AND LOCKNUT ARE INCLUDED ON LENGTHS OF 20" AND LONGER.

TABLE A	
P/N	L
MDC-4FR-2-18	12" [0.3m]
MDC-4FR-2-0.5M-18	20" [0.5m]
MDC-4FR-2-1M-18	40" [1m]
MDC-4FR-2-2M-18	79" [2m]
MDC-4FR-2-3M-18	118" [3m]
MDC-4FR-2-5M-18	197" [5m]
MDC-4FR-2-10M-18	393" [10m]

OTHER LENGTHS AVAILABLE  
PLEASE CONSULT FACTORY

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	10/27/2021
	CHECKED BY	JJH
	CHECK DATE	10/27/2021
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 4 PL FM M12 MDC RECP 18 AWG		
SIZE B	DWG. NO. MDC-4FR-2-ZZ-18	REV B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1