



WIRING	
MALE	FEMALE
PIN #	PIN #
1	1
2	2
3	3
4	4



MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
ARMOR:	SILICONE TUBING

APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

NOTE: TUBING WILL NOT BE OVERRMOLDED. EXPOSED CABLE ON ONE END COULD BE AS HIGH AS 0.25", BUT THIS MEANS THE CABLE WILL BE BUTTING UP AGAINST THE CONNECTOR ON THE OTHER END. IF TUBING IS CENTERED BETWEEN CONNECTORS, THE MAXIMUM EXPOSED CABLE WILL BE 0.125".

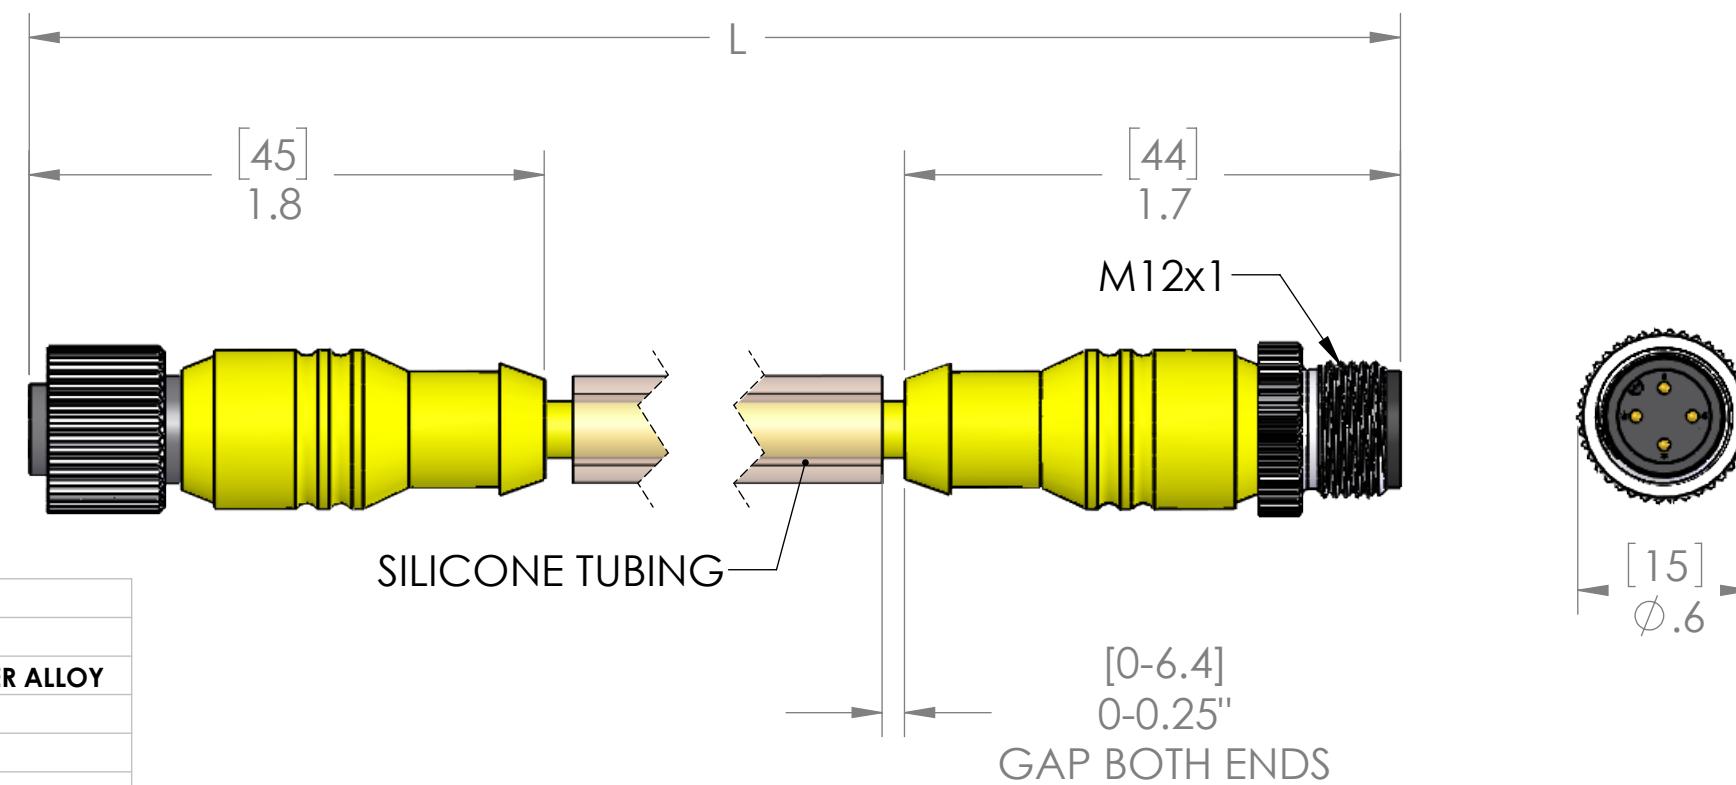

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS 300V
AMPS 4A
TEMP: 105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	07/07/2023
	CHECKED BY	JJH
	CHECK DATE	07/07/2023
COMMENTS:		
SIZE	DWG. NO.	
B	MDC-4MFP-ZZ-A50	
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1

TABLE A	
P/N	L
MDC-4MFP-0.5M-A50	20" [0.5M]
MDC-4MFP-1M-A50	40" [1M]
MDC-4MFP-1.5M-A50	59" [1.5M]
MDC-4MFP-2M-A50	79" [2M]
MDC-4MFP-3M-A50	118" [3M]
MDC-4MFP-4M-A50	157" [4M]
MDC-4MFP-5M-A50	197" [5M]
MDC-4MFP-6M-A50	236" [6M]
MDC-4MFP-8M-A50	315" [8M]
MDC-4MFP-10M-A50	393" [10M]
MDC-4MFP-15M-A50	590" [15M]
MDC-4MFP-20M-A50	786" [20M]
MDC-4MFP-25M-A50	983" [25M]
MDC-4MFP-30M-A50	1179" [30M]

MENCOM CORPORATION

TITLE:

REV C

C