


D
C
B
A

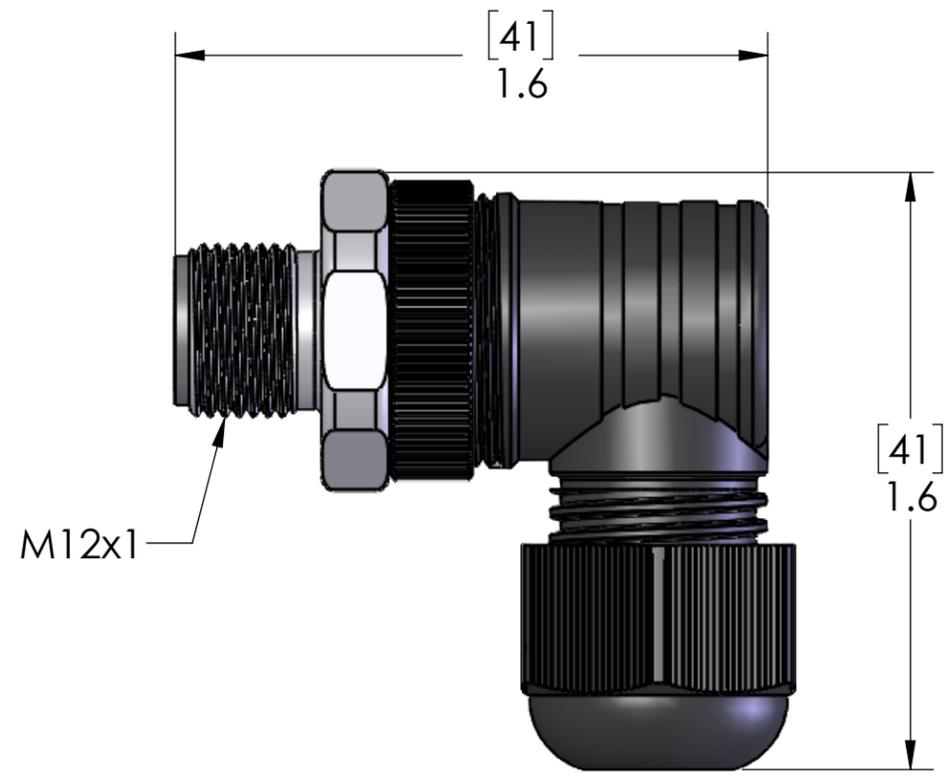

M12x1

WIRES ARE TERMINATED VIA SCREW TERMINALS

Voltage rating is 250V or the rating of the cable, whichever is less.

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	STAINLESS STEEL
INSERT:	POLYAMIDE
SEALS:	NBR
GLAND SEAL	NBR
SPECIFICATIONS:	
RATED CURRENT (A)	4A MAX
RATED VOLTAGE (V)	250V MAX
MAX WIRE SIZE:	18AWG
MIN WIRE SIZE:	24AWG
CABLE GRIP RANGE:	.157 - .315" [4mm - 8mm]
TEMP RATING:	-13°F - 185°F [-25°C - 85°C]
PROTECTION:	NEMA 1, 3, 4, 6P IEC IP67
APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED
RoHS:	YES
CE:	YES

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	GO
	DRAWN DATE	11/05/2020
	CHECKED BY	GO
	CHECK DATE	11/06/2020
COMMENTS:		
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 4 POLE R/A MALE M12 FIELD WIREABLE CONNECTOR		
SIZE	DWG. NO.	REV
B	MDC-4MP-FW09-R-SS	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1