



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/9/2005	

D

C

B

A

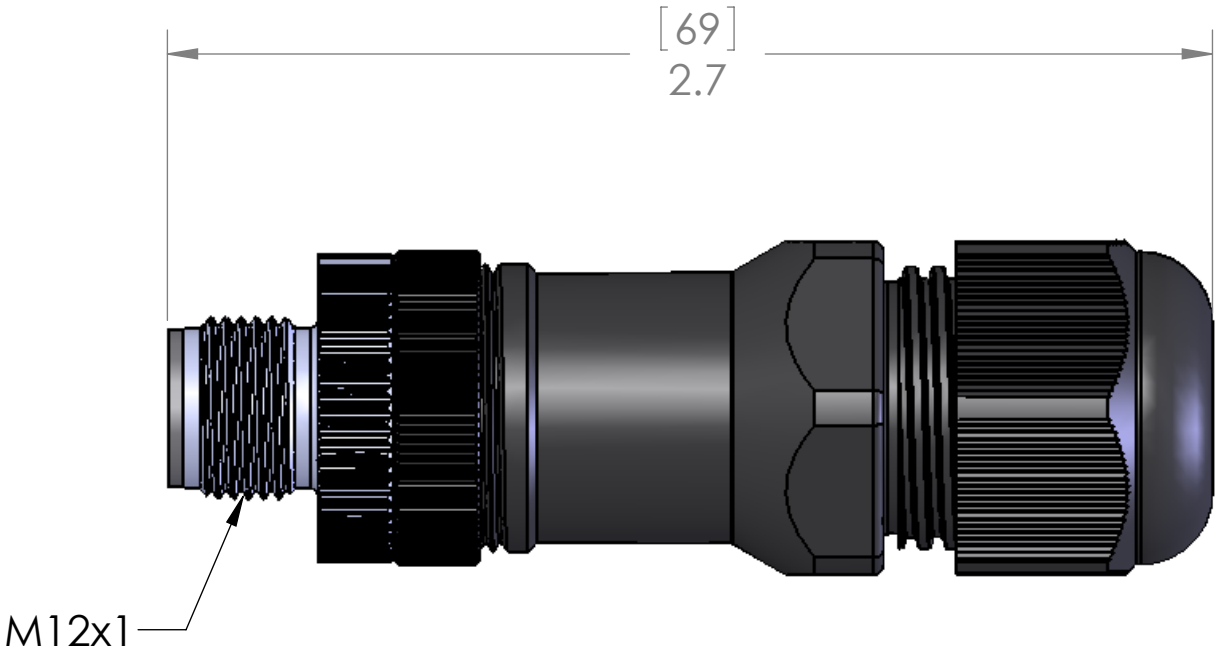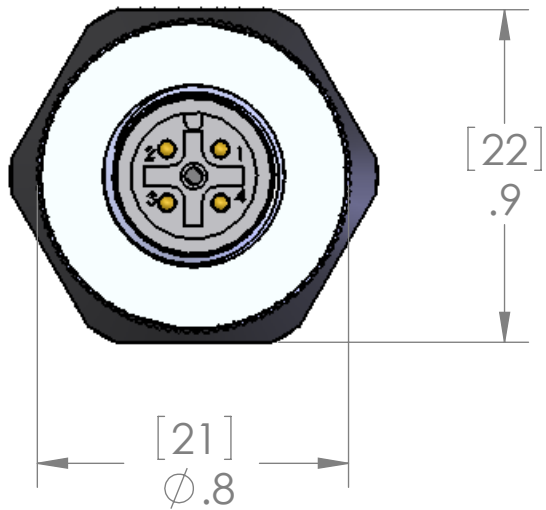

WIRES ARE TERMINATED VIA
SCREW TERMINALS

SPECIFICATIONS:

RATED CURRENT (A)	4A
RATED VOLTAGE (V)	250V
MAX WIRE SIZE:	18AWG [1.0sqmm]
MIN WIRE SIZE:	24AWG [0.25sqmm]
CABLE GRIP RANGE:	.197 - .393" [5 - 10mm]
TEMP RATING:	-40°F - 185°F [-40°C - 85°C]
SEAL RATING:	IP 67

MATERIALS

BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	NICKEL PLATED BRASS
SEALS:	NBR

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:			NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN		BEM
	CHECKED		
	ENG APPR.		
	MFG APPR.		
	Q.A.		
MATERIAL	COMMENTS:		
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MDC-4MP-FW11-2X5	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1