


WIRING		
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5

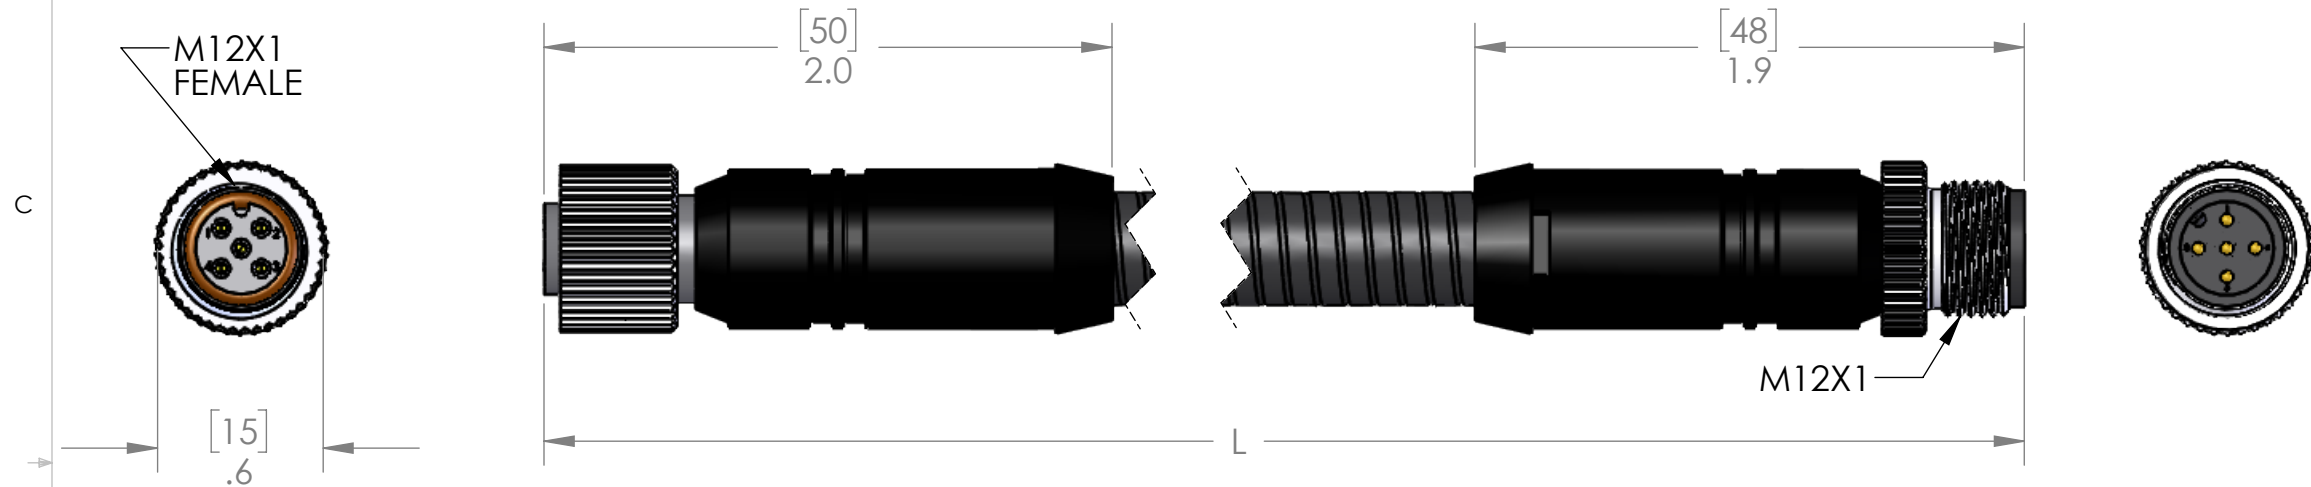

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
ARMOR:	PVC COATED SS FLEX TUBE
HEAT SHRINK:	
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MDC-5MFP-0.5M-A03	20"[0.5M]
MDC-5MFP-1M-A03	40"[1M]
MDC-5MFP-2M-A03	79"[2M]
MDC-5MFP-4M-A03	157"[4M]
MDC-5MFP-5M-A03	197"[5M]
MDC-5MFP-6M-A03	236"[6M]
MDC-5MFP-8M-A03	315"[8M]
MDC-5MFP-10M-A03	393"[10M]

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	JJH	MENCOM CORPORATION		
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	03/21/2022	TITLE: 5 PL MDC M-F EXT PVC ARMRD		
	CHECKED BY	ADM			
	CHECK DATE	03/21/2022			
	COMMENTS:				
MATERIAL			SIZE	DWG. NO.	REV
FINISH			B	MDC-5MFP-ZZ-A03	A
DO NOT SCALE DRAWING			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.</p>	VOLTS	300V
	AMPS	4A
	TEMP:	105°C