

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	3/15/2006	
B	UL AND SPEC CHANGES	11/10/2014	JJH

D

D

C

C


B

B

A

A

MATERIALS:	
BODY:	POLYAMIDE
COUPLING:	NICKEL PLATED ZINC
CONTACTS:	GOLD PLATED COPPER ALLOY
GROMMET:	NBR
O-RING:	NBR
SPECIFICATIONS:	
WIRE RANGE:	18-24AWG [1.0 - 0.25sqmm]
CABLE RANGE:	0.157 - 0.315" [4.0 - 8.0mm]
CONNECTION:	SCREW TERMINALS
VOLTS:	125V
AMPS:	4A
SEAL:	IP67
TEMP RANGE:	STATIC: -40°C - +100°C
	DYNAMIC: -20°C - +100°C
APPROVALS:	
US:	UL LISTED
CANADA:	C-UL LISTED

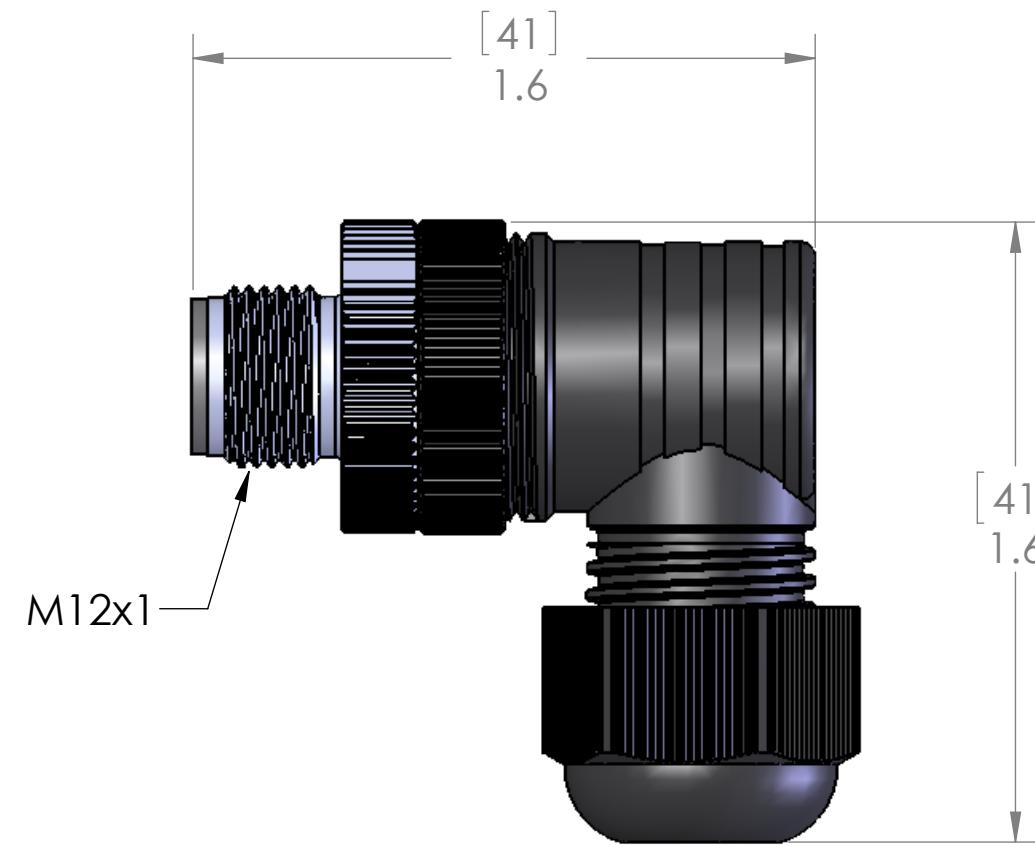

CONNECTION MADE VIA SCREW TERMINALS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	
			CHECKED		
			ENG APPR.		
			MFG APPR.		
			Q.A.	COMMENTS:	
		MATERIAL			TITLE: 5 POLE MALE FW
		FINISH			
		DO NOT SCALE DRAWING			
SIZE	DWG. NO.			REV	
B	MDC-5MP-FW09-R			B	
SCALE: 2:1	WEIGHT:			SHEET 1 OF 1	