

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	Redrawn	9/6/2007	
B	UL & SPEC CHANGES	11/10/2014	JJH

D

D

C

C

B

B

A

A


## MATERIALS:

BODY:	POLYAMIDE
COUPLING:	NICKEL PLATED ZINC
CONTACTS:	GOLD PLATED COPPER ALLOY
GROMMET:	NBR
O-RING:	NBR

## SPECIFICATIONS:

WIRE RANGE:	18-24AWG [1.0 - 0.25sqmm]
CABLE RANGE:	0.157 - 0.315" [4.0 - 8.0mm]
CONNECTION:	SCREW TERMINALS
VOLTS:	125V
AMPS:	4A
SEAL:	IP67
TEMP RANGE:	STATIC: -40°C - +100°C
	DYNAMIC: -20°C - +100°C

APPROVALS:	
US:	UL LISTED
CANADA:	C-UL LISTED

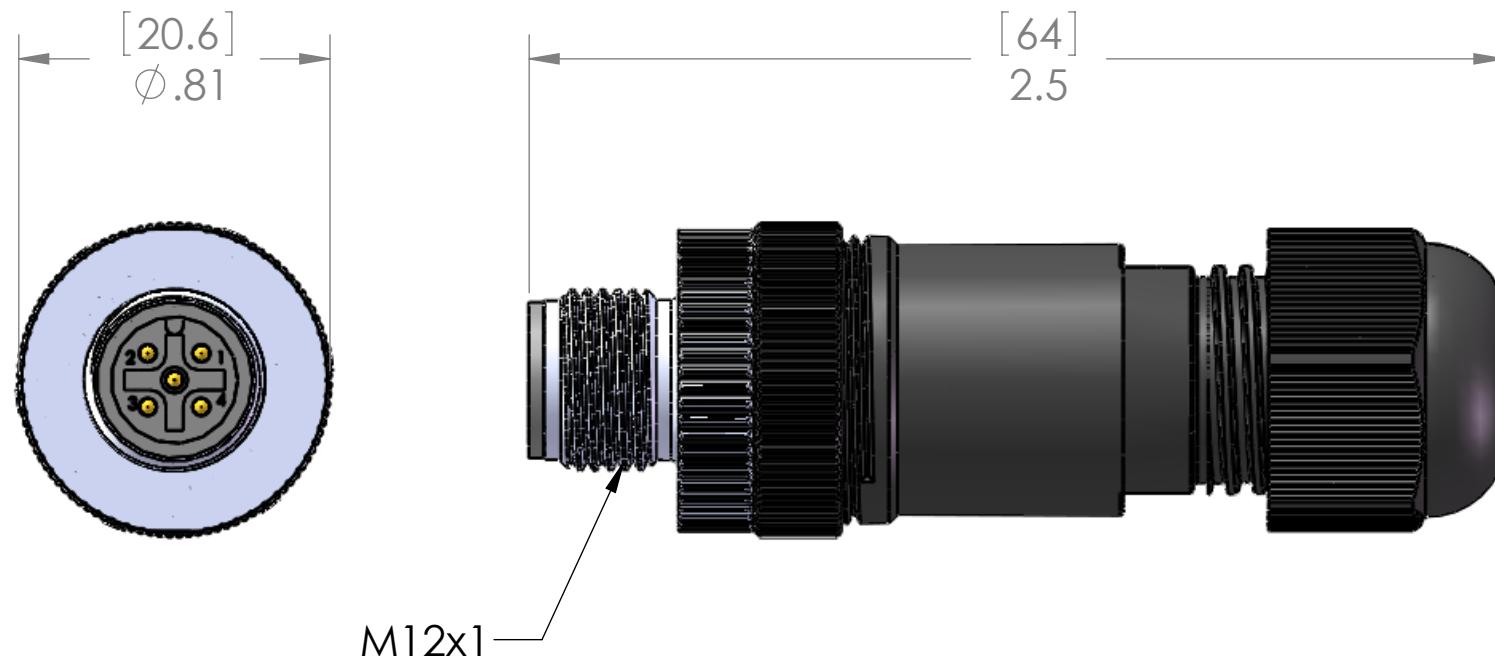

All connections made via Screw Terminals.

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
MATERIAL	COMMENTS:	
FINISH	DO NOT SCALE DRAWING	
SIZE	DWG. NO.	REV
<b>B</b>	MDC-5MP-FW09	<b>B</b>
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1