| PIN # | COLOR |
|---|---|
| | |
| 1 | BROWN |
| 2 | WHITE |
| 3 | BLUE |
| 4 | BLACK |
| 5 | GRAY |

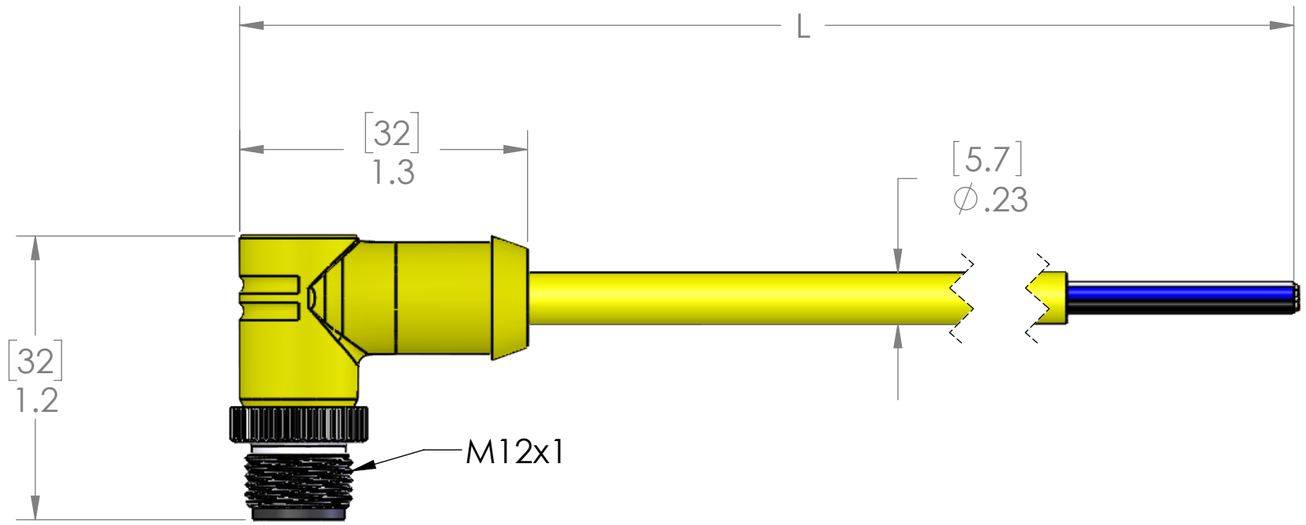


| P/N | L | STD? |
|---|---|---|
| | | |
| MDC-5MP-1M-R | 40" [1M] | YES |
| MDC-5MP-2M-R | 79" [2M] | YES |
| MDC-5MP-3M-R | 118" [3M] | NO |
| MDC-5MP-4M-R | 157" [4M] | YES |
| MDC-5MP-5M-R | 197" [5M] | YES |
| MDC-5MP-6M-R | 236" [6M] | NO |
| MDC-5MP-8M-R | 315" [8M] | NO |
| MDC-5MP-10M-R | 393" [10M] | YES |
| MDC-5MP-15M-R | 590" [15M] | YES |
| MDC-5MP-20M-R | 786" [20M] | NO |
| MDC-5MP-30M-R | 1179" [30M] | NO |
| MDC-5MP-50M-R | 1969" [50M | NO |

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

| MATERIALS | |
|---|---|
| BODY: | YELLOW PVC |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| CABLE: | |
| STYLE: | AWM |
| AWG: | 22 AWG |
| JACKET: | YELLOW PVC |
| VOLTAGE: | 600V |
| SHIELD: | NO |
| COUPLING: | NICKEL PLATED BRASS |
| INSERT: | POLYAMIDE |
| O-RING: | N/A |
| | |
| APPROVALS | |
| US: | UL LISTED |
| CANADA: | C-UL LISTED |
| ROHS: | YES |
| CE & UKCA: | YES |
| | |
| RATINGS | |
| PROTECTION CLASS: | UL TYPE 4 & 12, IEC IP69 |

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

| | |
|---|---|
| VOLTS | 300V |
| AMPS | 4A |
| TEMP: | 105°C |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | ADM |
| DRAWN DATE | 06/15/2023 |
| CHECKED BY | JJH |
| CHECK DATE | 06/15/2023 |

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MDC-5MP-ZZ-R | REV B

SCALE: 3:2 | WEIGHT: | SHEET 1 OF 1