



PIN #	COLOR
1	GRAY (SHIELD)
2	RED (V+)
3	BLACK (V-)
4	WHITE (CAN_H)
5	BLUE (CAN_L)

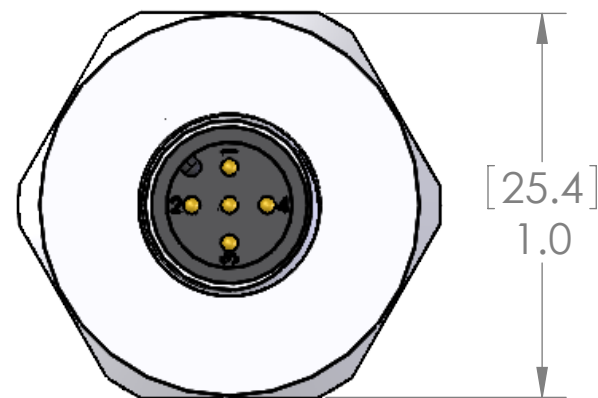

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	22 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	POLYAMIDE
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

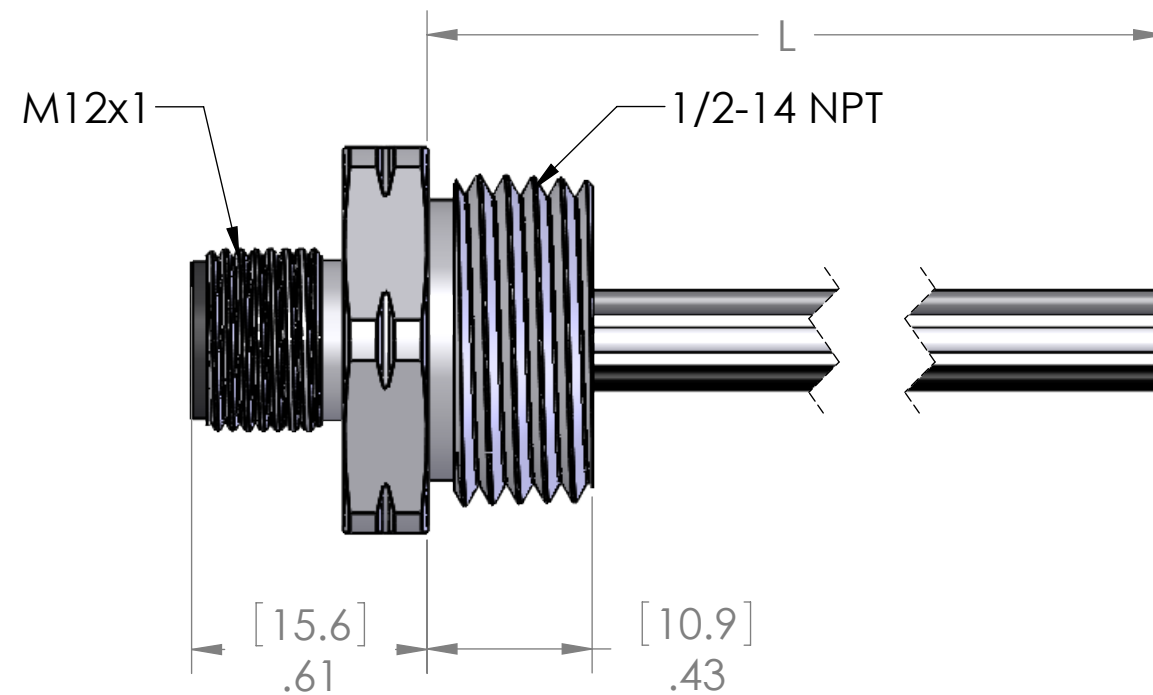

AN O-RING AND LOCKNUT ARE INCLUDED
FOR LENGTHS OF 20" [0.5M] AND LONGER

TABLE A	
P/N	L
MDC-5MR-2-22-DN	12" [0.3m]
MDC-5MR-2-0.5M-22-DN	20" [0.5m]
MDC-5MR-2-0.6M-22-DN	24" [0.6m]
MDC-5MR-2-1M-22-DN	40" [1m]
MDC-5MR-2-2M-22-DN	79" [2m]
MDC-5MR-2-3M-22-DN	118" [3m]
MDC-5MR-2-5M-22-DN	197" [5m]
MDC-5MR-2-10M-22-DN	393" [10m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		DRAWN BY		ADM		MENCOM CORPORATION TITLE:					
		DRAWN DATE		08/28/2023							
		CHECKED BY		JJH							
		CHECK DATE		08/29/2023							
MATERIAL		COMMENTS:				SIZE		DWG. NO.		REV	
FINISH						B		MDC-5MR-2-ZZ-22-DN		B	
DO NOT SCALE DRAWING						SCALE: 2:1		WEIGHT:		SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C