
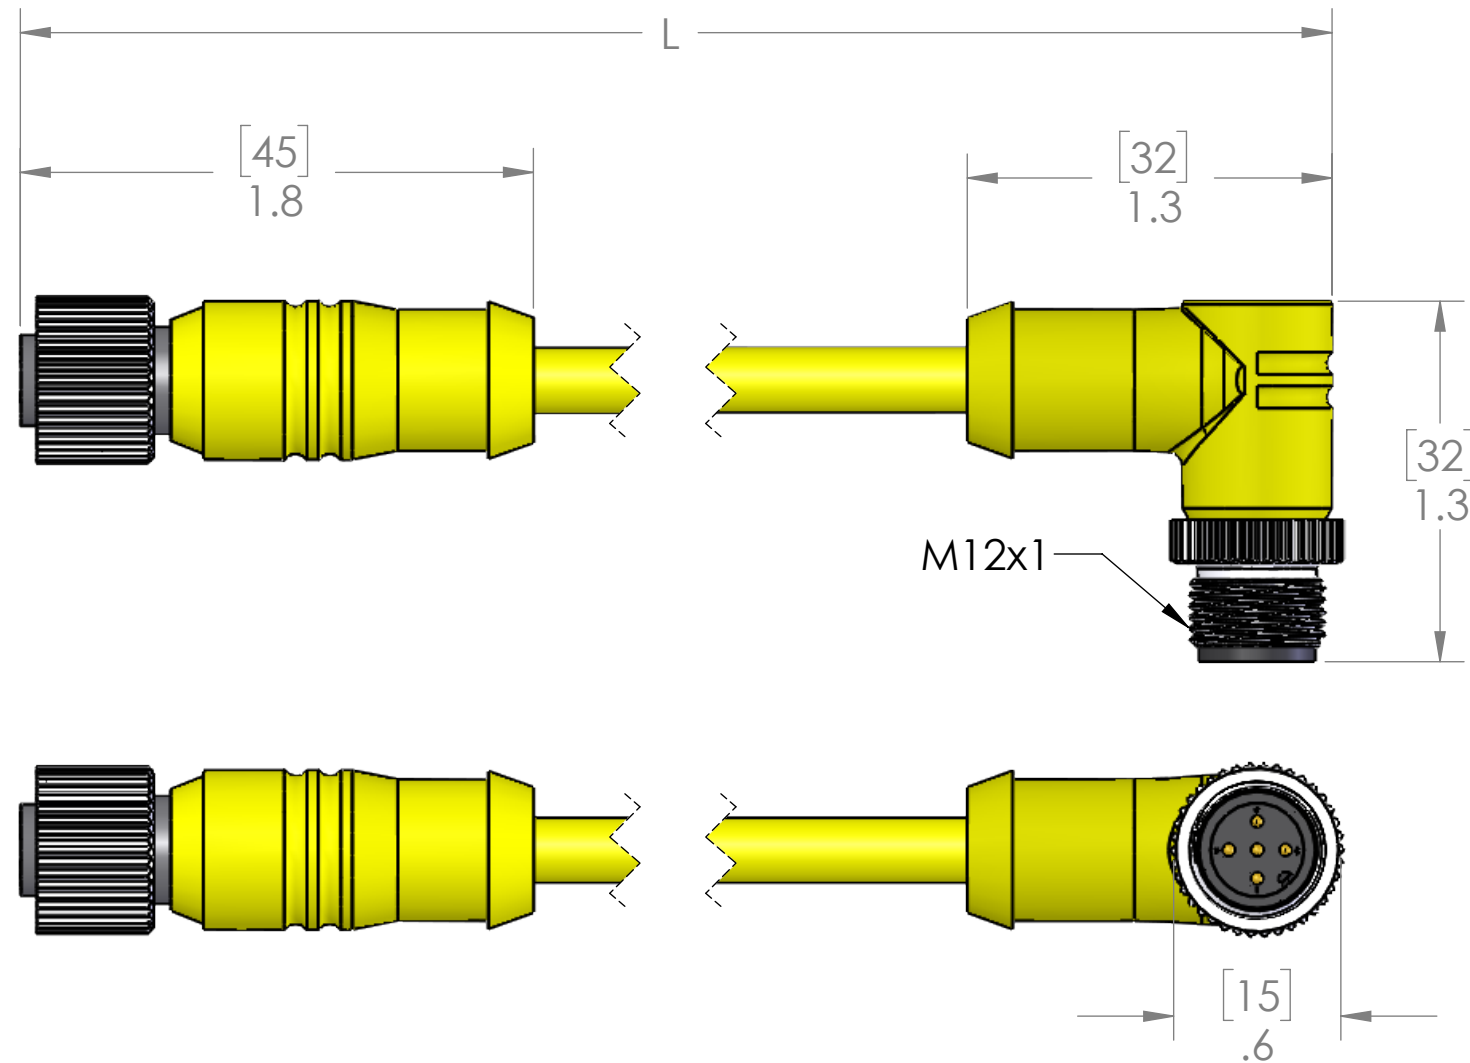


WIRING		
FEMALE		MALE
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5

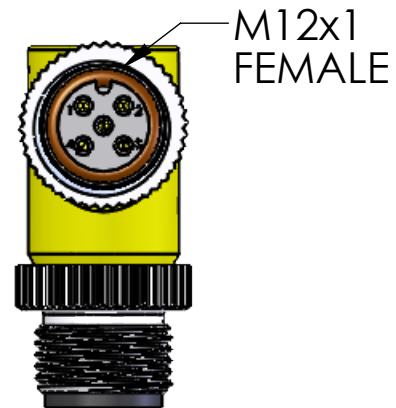

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

P/N	L	STD?
MDC-5MRFP-1M	40" [1m]	YES
MDC-5MRFP-2M	79" [2m]	YES
MDC-5MRFP-3M	118" [3m]	YES
MDC-5MRFP-4M	157" [4m]	YES
MDC-5MRFP-5M	197" [5m]	YES
MDC-5MRFP-6M	236" [6m]	NO
MDC-5MRFP-8M	315" [8m]	NO
MDC-5MRFP-10M	393" [10m]	YES
MDC-5MRFP-15M	591" [15m]	YES
MDC-5MRFP-20M	787" [20m]	YES
MDC-5MRFP-30M	1181" [30m]	NO
MDC-5MRFP-50M	1968" [50m]	NO

PARTS LISTED AS NOT BEING STANDARD  
MAY HAVE MINIMUM ORDER QUANTITIES

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM	MENCOM CORPORATION  TITLE:  5 PL M-F EXT		
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	06/19/2023			
		CHECKED BY	JJH			
		CHECK DATE	06/20/2023			
		COMMENTS:		SIZE	DWG. NO.	REV
MATERIAL				<b>B</b>	MDC-5MRFP-ZZ	<b>B</b>
FINISH						
DO NOT SCALE DRAWING				SCALE: 3:2	WEIGHT:	SHEET 1 OF 1