


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/2/2007	

D

D

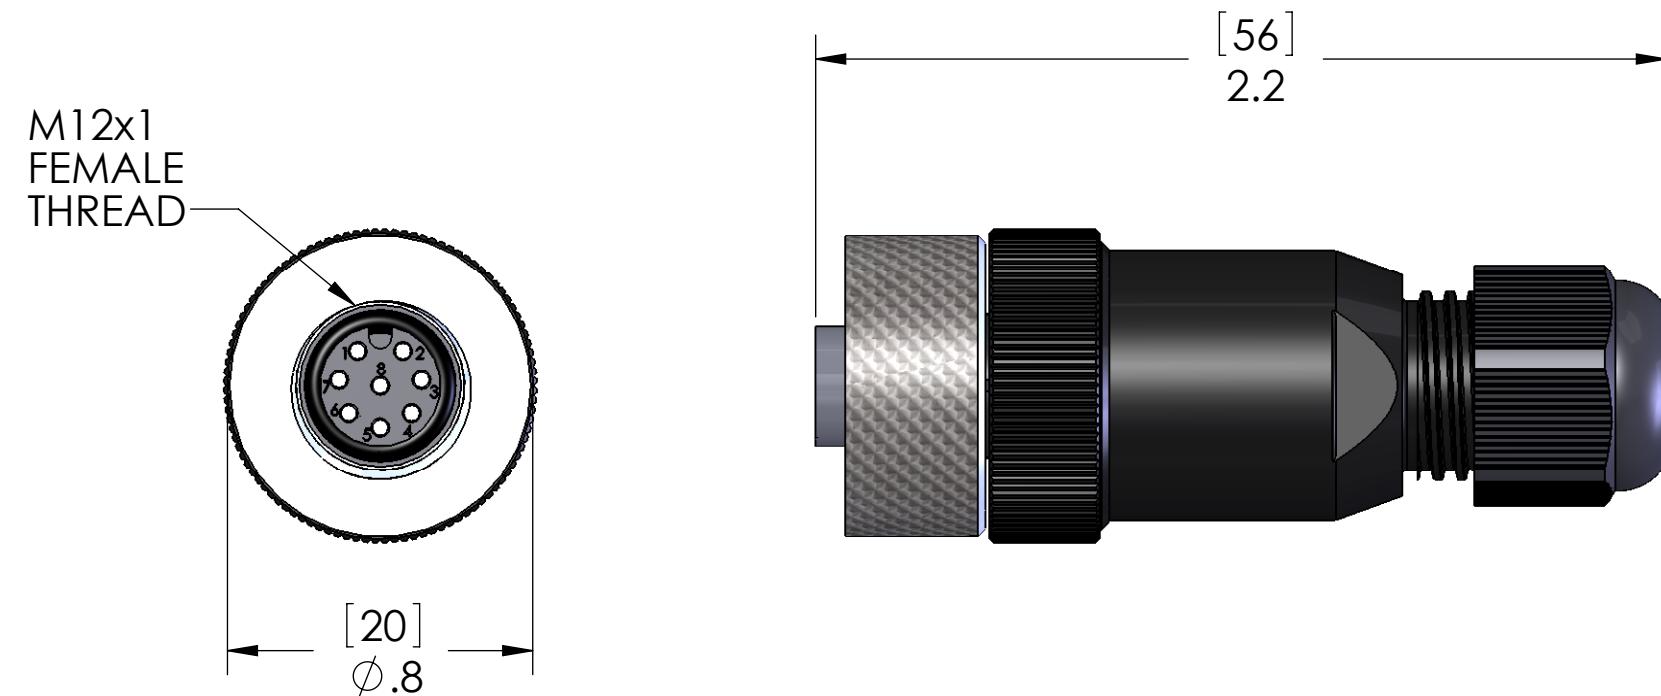

WIRES ARE TERMINATED VIA
SCREW TERMINALS

SPECIFICATIONS	
RATED CURRENT (A)	2A
RATED VOLTAGE (V)	60V
MAX WIRE SIZE:	20AWG [0.5sqmm]
MIN WIRE SIZE:	26AWG [0.14sqmm]
CABLE GRIP RANGE:	.117 - .256" [3 - 6.5mm]
TEMP RATING:	-40°F - 185°F [-40°C - 85°C]
MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
SEALS:	NBR

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION TITLE: COMMENTS:
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	
			CHECKED		
			ENG APPR.		
			MFG APPR.		
			Q.A.		
		MATERIAL		SIZE B DWG. NO. MDC-8FP-FW07	
		FINISH			
		DO NOT SCALE DRAWING	SCALE: 2:1	WEIGHT:	SHEET 1 OF 1