
REVISIONS REV. DESCRIPTION APPROVED DATE Redrawn 9/6/2007 Α

[20.6] \emptyset .81

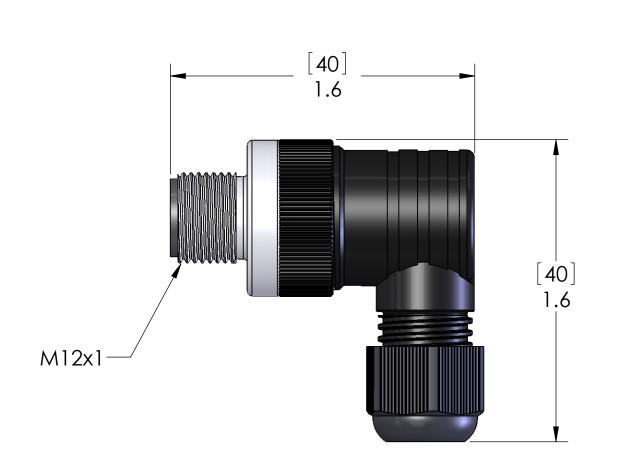

All connections made via Screw Terminals. Keyway is positionable at 90° intervals

UNLESS OTHERWISE SPECIFIED:		NAME			00000	- · - · - · ·		
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	WFN(MENCOM CORPORATION				
	CHECKED		TITLE:					
	ENG APPR.							
	MFG APPR.							
	Q.A.							
MATERIAL	COMMENTS:		SIZE DWG			_	REV •	V
FINISH			В	MDC-8MP-FW		-R	A	
DO NOT SCALE DRAWING			SCALE: 2:1	WEIGHT:		SHEE	T 1 OF 1	
	DIMENSIONS ARE IN INCHES AND [MM] MATERIAL FINISH	DIMENSIONS ARE IN INCHES AND [MM] CHECKED ENG APPR. MFG APPR. Q.A. MATERIAL COMMENTS:	DIMENSIONS ARE IN INCHES AND [MM] DRAWN CHECKED ENG APPR. MFG APPR. Q.A. MATERIAL COMMENTS:	DIMENSIONS ARE IN INCHES AND [MM] DRAWN CHECKED ENG APPR. MFG APPR. Q.A. COMMENTS: SIZE DWG B	DIMENSIONS ARE IN INCHES AND [MM] DRAWN CHECKED ENG APPR. MFG APPR. Q.A. COMMENTS: SIZE DWG. NO. MDC-	DIMENSIONS ARE IN INCHES AND [MM] DRAWN CHECKED ENG APPR. MFG APPR. Q.A. COMMENTS: SIZE DWG. NO. MDC-8MP-FW07-	DIMENSIONS ARE IN INCHES AND [MM] DRAWN CHECKED ENG APPR. MFG APPR. Q.A. COMMENTS: SIZE DWG. NO. B MDC-8MP-FW07-R	DIMENSIONS ARE IN INCHES AND [MM] DRAWN CHECKED ENG APPR. MATERIAL MATERIAL DRAWN BEM MENCOM CORPORATION TITLE: ENG APPR. Q.A. COMMENTS: SIZE DWG. NO. MDC-8MP-FW07-R A MDC-8MP-FW07-R

SPECIFICATIONS: RATED CURRENT (A) 2A RATED VOLTAGE (V) 60V 20AWG [0.5sqmm] **MAX WIRE SIZE:** MIN WIRE SIZE: 24AWG [0.25sqmm] CABLE GRIP RANGE: .157 - .315" [4 - 8mm] -40°F - 185°F [-40°C - 85°C] **TEMP RATING:**

MATERIALS POLYAMIDE BODY: CONTACTS: **GOLD PLATED COPPER ALLOY** O-RINGS: NBR COUPLING: **NICKEL PLATED BRASS**