


8 7 6 5 4 3 2 1

D

D

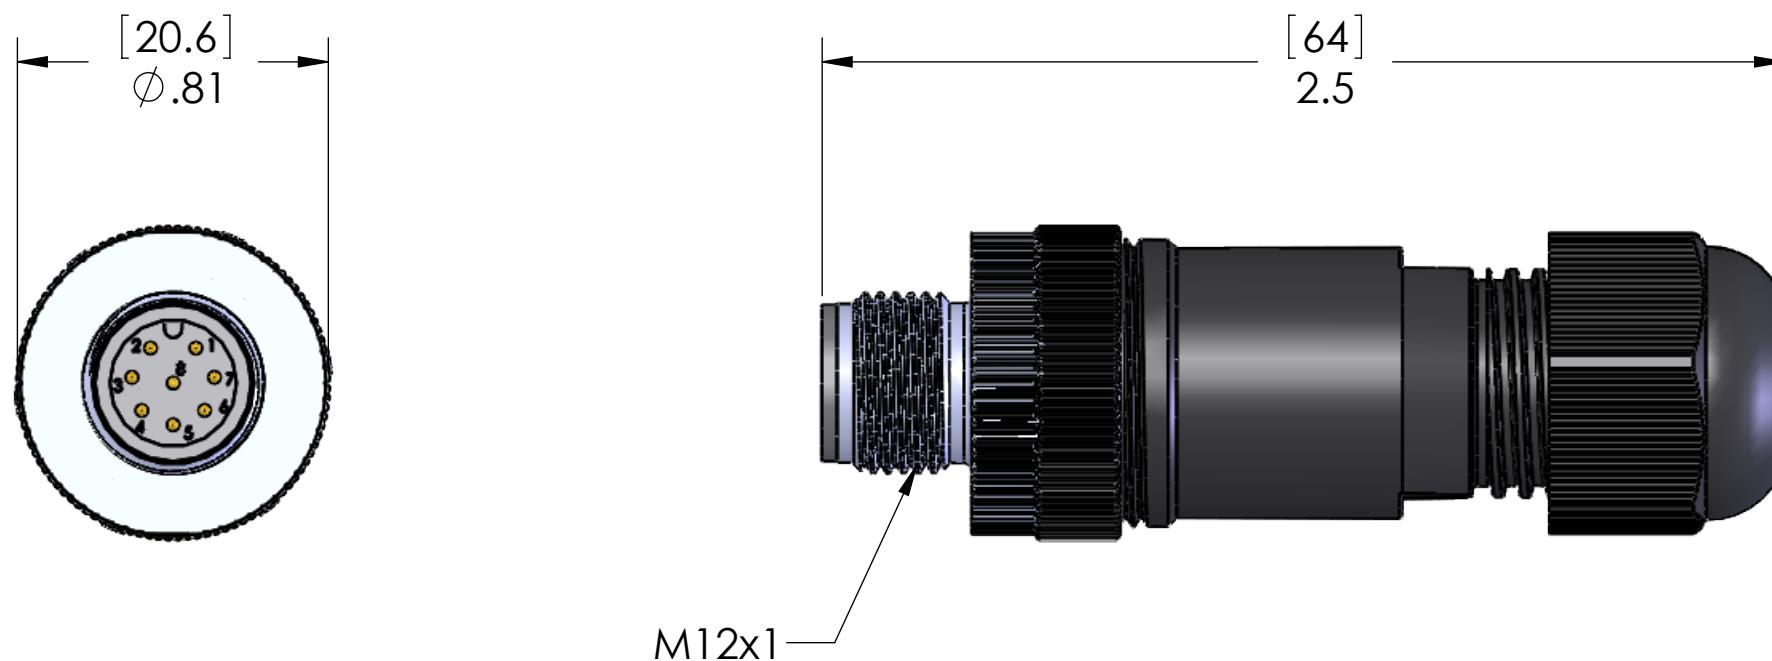

Cable range: 0.157" - 0.315" [4 - 8mm]

All connections made via Screw Terminals.

SPECIFICATIONS:	
RATED CURRENT (A)	2A
RATED VOLTAGE (V)	60VAC / 75VDC
MAX WIRE SIZE:	18AWG [1.0sqmm]
MIN WIRE SIZE:	24AWG [0.25sqmm]
TEMP RATING:	-40°F - 185°F [-40°C - 85°C]
PROTECTION:	NEMA 1, 3, 4, 6P IEC IP67

MATERIALS	
BODY:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
COUPLING:	NICKEL PLATED BRASS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		
SIZE	DWG. NO.	REV
B	MDC-8MP-FW09	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1

A