

MIN		MDC
PIN #	WIRING	PIN #
4	-----	1
5	-----	2
2	-----	3
1	-----	4
3	-----	5

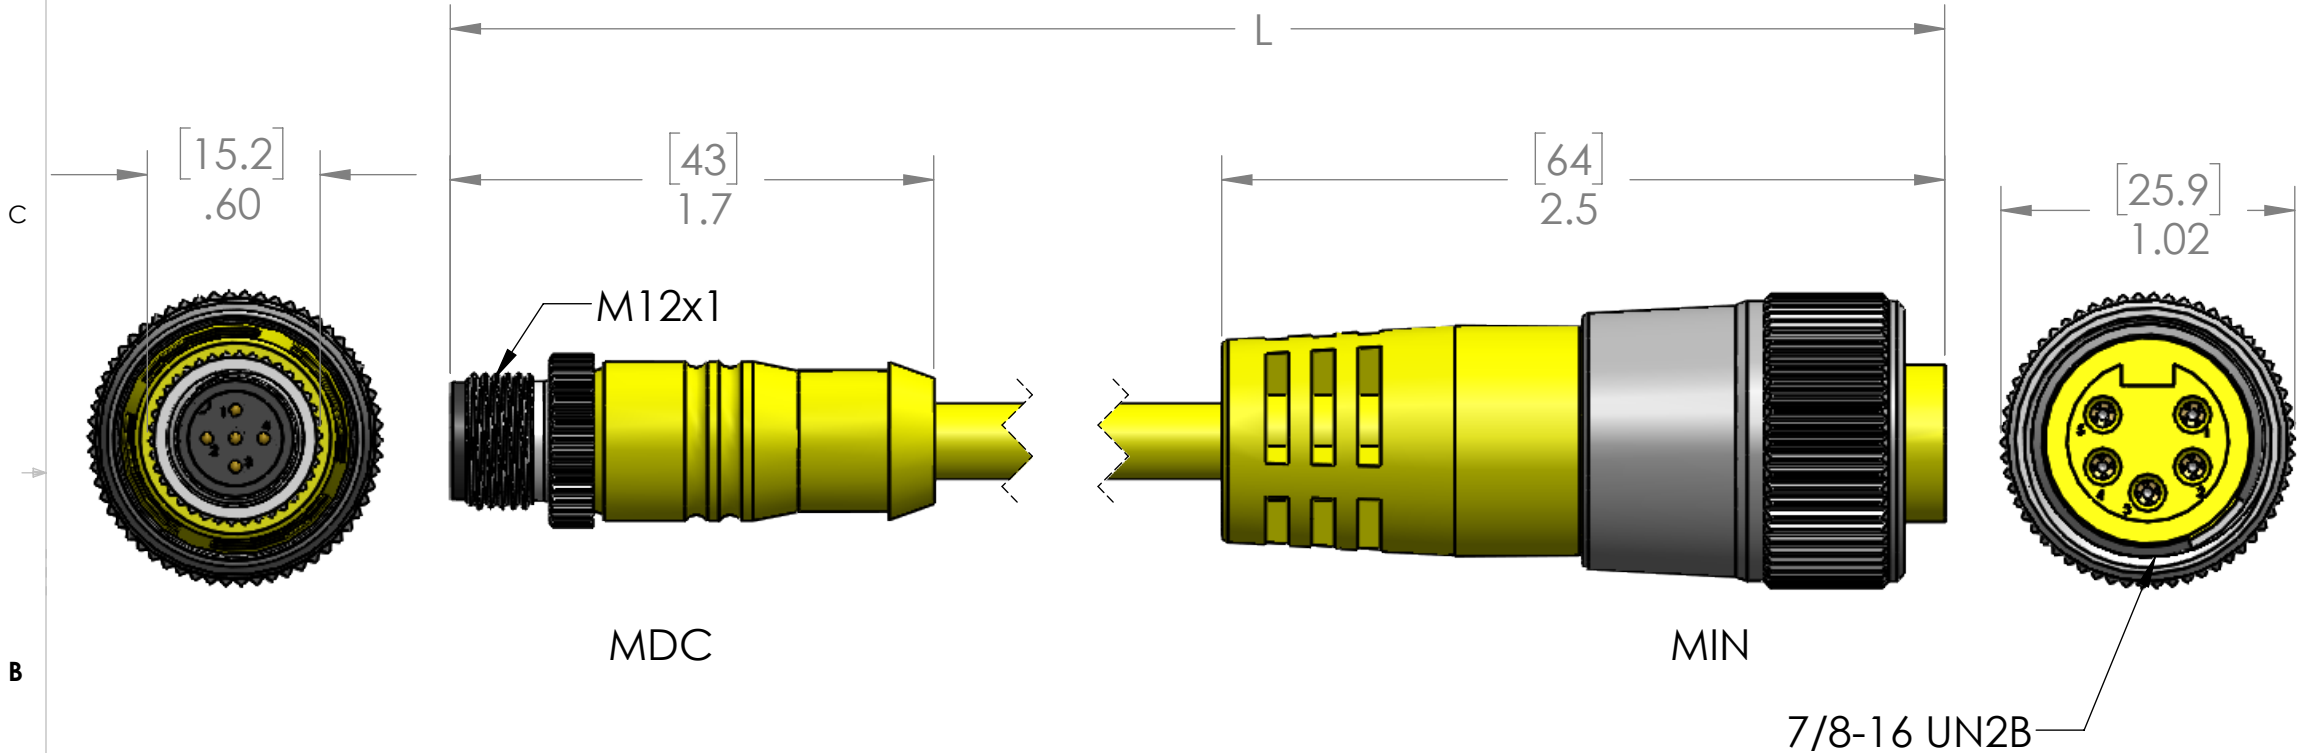


TABLE A		
P/N	L	STD?
MDCIN-4MFPX-0.5M	20" [0.5m]	NO
MDCIN-4MFPX-1M	40" [1m]	YES
MDCIN-4MFPX-2M	79" [2m]	YES
MDCIN-4MFPX-3M	118" [3m]	NO
MDCIN-4MFPX-4M	157" [4m]	NO
MDCIN-4MFPX-5M	197" [5m]	YES
MDCIN-4MFPX-10M	393" [10m]	YES
MDCIN-4MFPX-20M	786" [15m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	18 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE & YELLOW PVC
O-RING:	N/A
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	08/29/2023
	CHECKED BY	JJH
	CHECK DATE	08/29/2023
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MDCIN-5MFPX-ZZ	B
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1