MALE PIN#	WIRING	FEMALE PIN#
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
6	-----	6
7	-----	7
8	-----	8
9	-----	9
10	-----	10
11	-----	11
12	-----	12

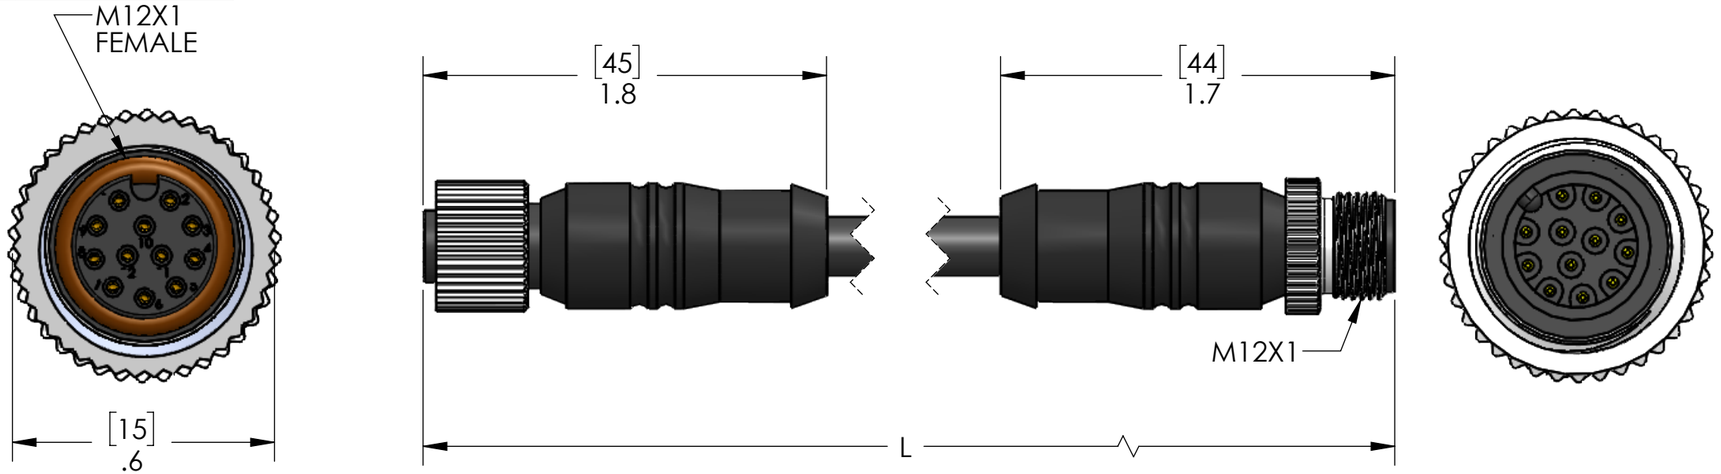

P/N	L	STD?
MDCM-12MFP-1M-B	40" [1m]	YES
MDCM-12MFP-2M-B	79" [2m]	YES
MDCM-12MFP-3M-B	118" [3m]	YES
MDCM-12MFP-4M-B	157" [4m]	YES
MDCM-12MFP-5M-B	197" [5m]	YES
MDCM-12MFP-8M-B	315" [8m]	NO
MDCM-12MFP-10M-B	393" [10m]	YES
MDCM-12MFP-15M-B	590" [15m]	YES
MDCM-12MFP-20M-B	787" [20m]	YES

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	24 AWG
JACKET:	PVC
VOLTAGE:	600V
SHIELD:	MYLAR W/DRAIN
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	IEC IP69

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	30V
AMPS	2A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	JJH
DRAWN DATE	03/16/2023
CHECKED BY	ADM
CHECK DATE	03/16/2023

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MDCM-12MFP-ZZ-B | REV B

SCALE: 3:2 | WEIGHT: | SHEET 1 OF 1