REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	6/4/2013	DCT

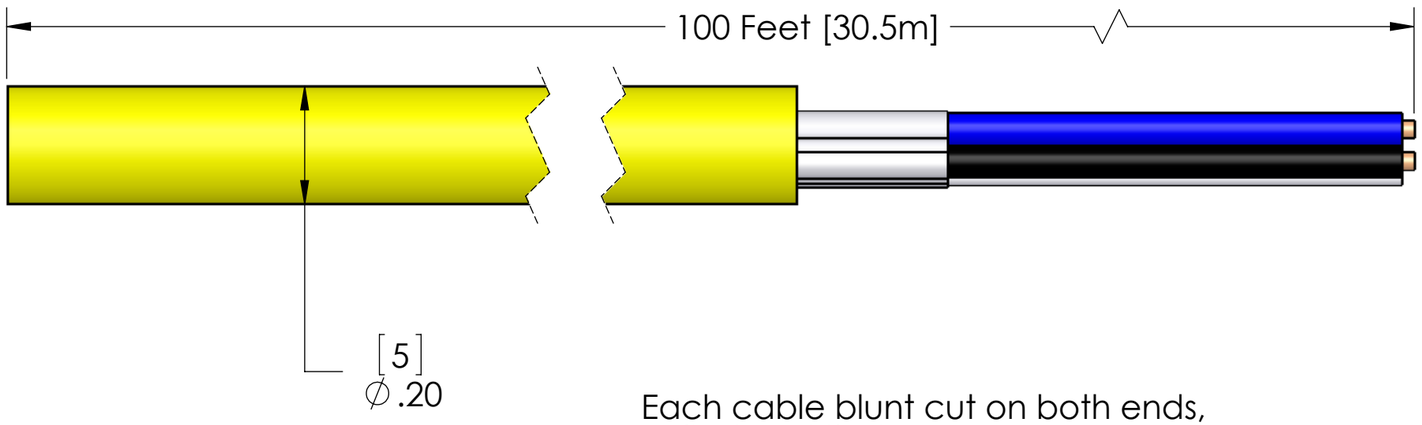

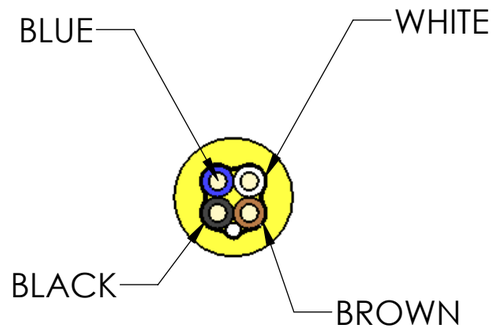

Each cable blunt cut on both ends, coiled and tied.

SPECIFICATIONS:	
UL STYLE:	AWM 2661
CSA STYLE:	I / II AB
CABLE JACKET MATERIAL:	Yellow PVC
CABLE JACKET THICKNESS:	.035" nom., .024" min.
COND. JACKET MATERIAL:	PVC
COND. JACKET THICKNESS:	.01" nom.
COND. STRANDING:	22AWG - 19x.0058 TC
COND. DIAMETER:	.05" nom.
FILLER:	None
DRAIN WIRE:	24AWG TC, stranded
SEPARATOR:	Foil Mylar (foil facing in)
ELECTRICAL REQUIREMENTS:	
VOLTAGE:	300V
MECHANICAL REQUIREMENTS:	
EXTRUSION STYLE:	PRESSURE EXTRUSION
JACKET PRINTING:	INDENT PRINTING OF UL / CSA INFORMATION. NO COMPANY NAMES ALLOWED
REEL SIZE:	24"
TEMPERATURE:	105°C

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME
DRAWN	JJH
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MDCM-4CBL-C	A

SCALE: 3:1	WEIGHT:	SHEET 1 OF 1