

8 7 6 5 4 3 2 1

D

D

C


C

B


B

A

A

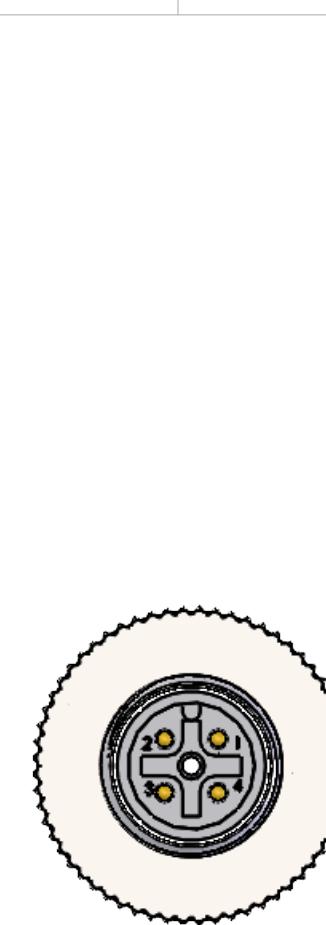

M12x1  
MALE  
THREAD

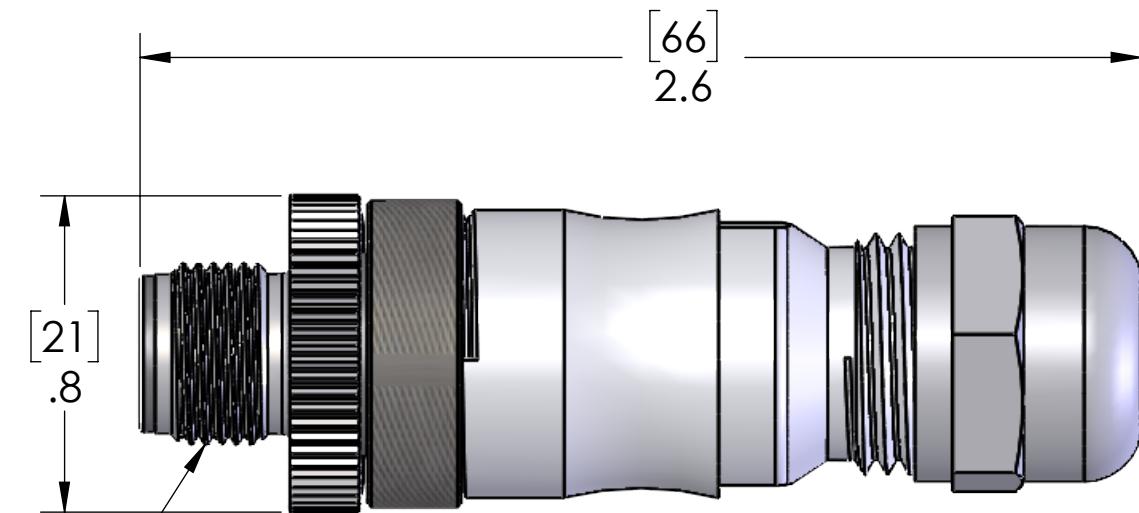

WIRES ARE TERMINATED VIA  
SCREW TERMINALS

MATERIALS	
BODY:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	POLYAMIDE
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	4A max
VOLTS:	250V max
SEAL:	IP67
CABLE RANGE:	18AWG - 24AWG 0.118" - 0.354" (3mm - 9mm) OD

Voltage rating is 250V or the rating of the cable, whichever is less.

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM	MENCOM CORPORATION
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	09/22/2016	
CHECKED BY	CHECK DATE		
COMMENTS:			
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			
SIZE	DWG. NO.	REV	
B	MDCM-4MP-FW	B	
SCALE: 2:1	WEIGHT:		SHEET 1 OF 1

8 7 6 5 4 3 2 1