


PIN #	WIRING	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
6	-----	6
7	NOT USED	7
8	NOT USED	8

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	7/27/2005	
B	UPDATED OVERMOLD	4/6/2022	APR

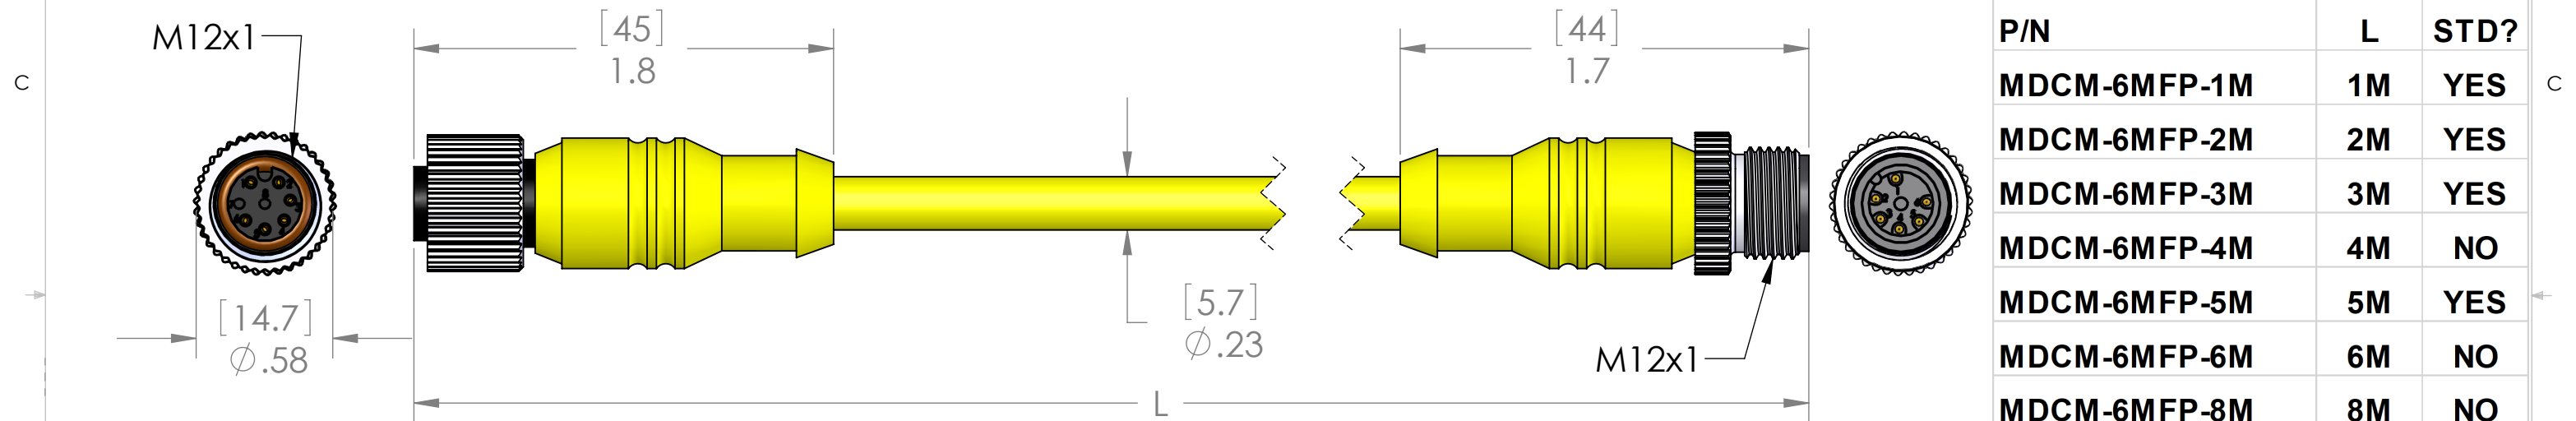

P/N	L	STD?
MDCM-6MFP-1M	1M	YES
MDCM-6MFP-2M	2M	YES
MDCM-6MFP-3M	3M	YES
MDCM-6MFP-4M	4M	NO
MDCM-6MFP-5M	5M	YES
MDCM-6MFP-6M	6M	NO
MDCM-6MFP-8M	8M	NO
MDCM-6MFP-10M	10M	YES
MDCM-6MFP-15M	15M	NO
MDCM-6MFP-20M	20M	NO
MDCM-6MFP-30M	30M	NO
MDCM-6MFP-50M	50M	NO

B	MATERIALS	
	BODY:	YELLOW PVC
	CONTACTS:	GOLD PLATED COPPER ALLOY
	CABLE:	
	STYLE:	AWM
	AWG:	24/6
	JACKET:	YELLOW PVC
	VOLTAGE:	600V
	SHIELD:	MYLAR W/DRAIN
	COUPLING:	NICKEL PLATED BRASS
A	INSERT:	POLYAMIDE
	O-RING:	FPM
	APPROVALS	
	US:	UL LISTED
	CANADA:	C-UL LISTED
	ROHS:	YES
	CE:	YES
	RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69	

PARTS LISTED AS NOT BEING STANDARD  
MAY HAVE MINIMUM ORDER QUANTITIES

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	DCG		MENCOM CORPORATION							
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	04/06/2022						TITLE:			
		CHECKED BY	DCG									
		CHECK DATE	04/06/2022									
					SIZE DWG. NO. REV							
MATERIAL		COMMENTS:		B			MDCM-6MFP-ZZ			B		
FINISH												
DO NOT SCALE DRAWING				SCALE: 1.5:1			WEIGHT:			SHEET 1 OF 1		

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	60V
AMPS	2A
TEMP:	80°C