



REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	2/28/2012	JJH

D

D

M12x1
MALE
THREAD

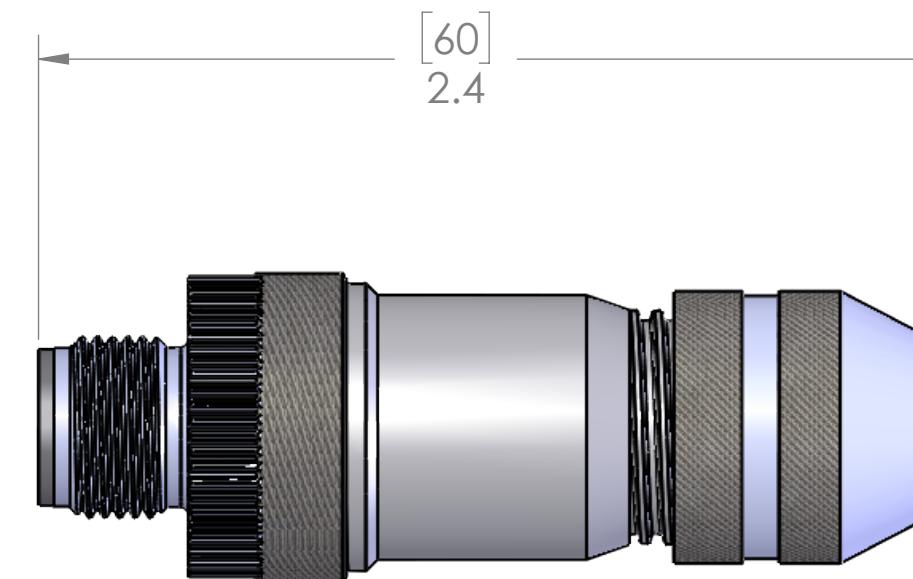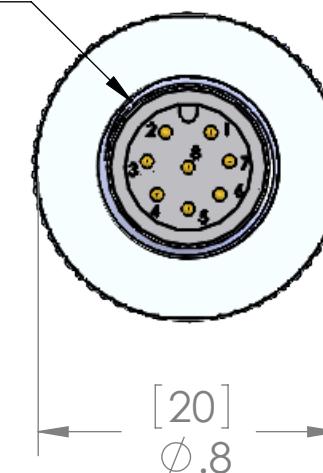

WIRES ARE TERMINATED VIA
SCREW TERMINALS

SPECIFICATIONS:

RATED CURRENT (A)	2A
RATED VOLTAGE (V)	60V
MAX WIRE SIZE:	20AWG [0.5sqmm]
MIN WIRE SIZE:	26AWG [0.14sqmm]
CABLE GRIP RANGE:	.236 - .315" [6 - 8mm]
TEMP RATING:	-40°F - 185°F [-40°C - 85°C]

MATERIALS	
BODY:	NICKEL PLATED ZINC DIE CAST
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	NICKEL PLATED ZINC DIE CAST
INSERT:	POLYAMIDE
SEALS:	NBR

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS
AMPS
TEMP:

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	09/22/2016
	CHECKED BY	
	CHECK DATE	

COMMENTS:

MATERIAL

FINISH

DO NOT SCALE DRAWING

MENCOM CORPORATION

TITLE:

8 PL FLD WIRE MAL PLG
SHLDDED

SIZE	DWG. NO.	REV
B	MDCM-8MP-FW	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1