| FEMALE | | MALE |
|---|---|---|
| PIN # | | PIN # |
| | | |
| 1 | ------- | 1 |
| 2 | ------- | 2 |
| 3 | ------- | 3 |
| 4 | ------- | 4 |

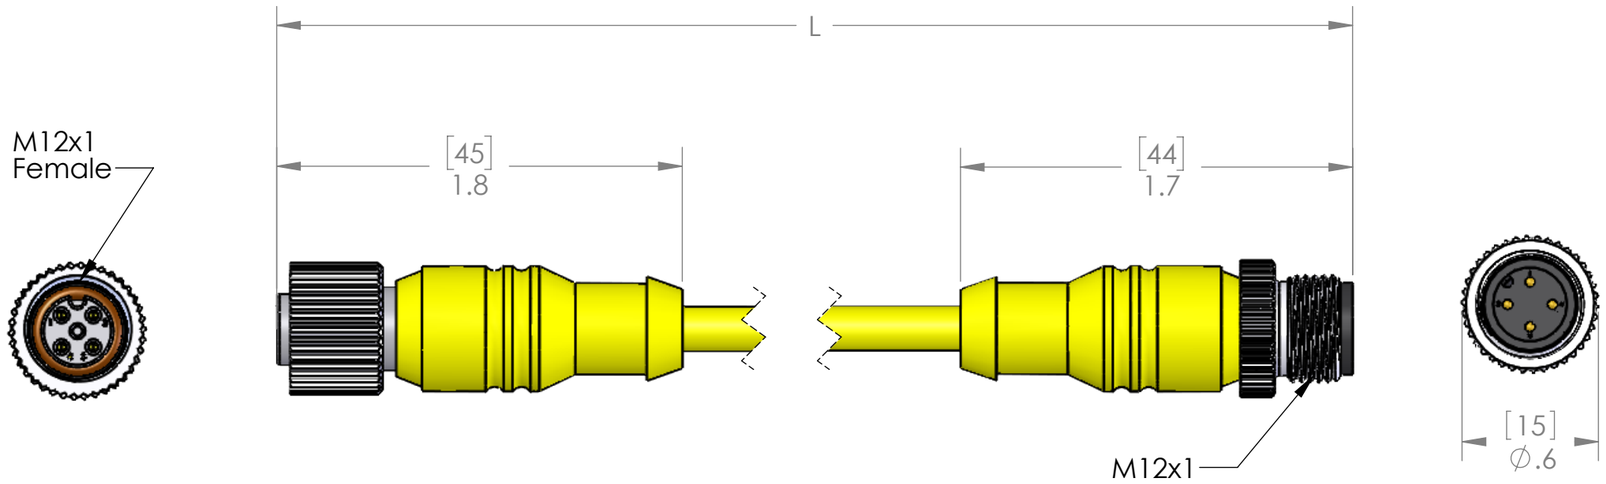


| P/N | L | STD? |
|---|---|---|
| | | |
| MDCP-4MFP-1M | 40" [1M] | YES |
| MDCP-4MFP-2M | 79" [2M] | YES |
| MDCP-4MFP-3M | 118" [3M] | NO |
| MDCP-4MFP-4M | 157" [4M] | NO |
| MDCP-4MFP-5M | 197"[5M] | YES |
| MDCP-4MFP-6M | 236" [6M] | NO |
| MDCP-4MFP-10M | 393" [10M] | YES |
| MDCP-4MFP-15M | 590" [15M] | YES |
| MDCP-4MFP-20M | 786" [20M] | NO |
| MDCP-4MFP-30M | 1179" [30M] | NO |

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

| | |
|---|---|
| MATERIALS | |
| BODY: | YELLOW PUR |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| CABLE: | |
| STYLE: | AWM |
| AWG: | 22 AWG |
| JACKET: | YELLOW PUR |
| VOLTAGE: | 300V |
| SHIELD: | NO |
| COUPLING: | NICKEL PLATED BRASS |
| INSERT: | POLYAMIDE |
| O-RING: | FPM |
| | |
| APPROVALS | |
| US: | UL LISTED |
| CANADA: | C-UL LISTED |
| ROHS: | YES |
| CE & UKCA: | YES |
| | |
| RATINGS | |
| PROTECTION CLASS: | IEC IP69 |

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

| | |
|---|---|
| VOLTS | 300V |
| AMPS | 4A |
| TEMP: | 80°C |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | ADM |
| DRAWN DATE | 06/28/2023 |
| CHECKED BY | JJH |
| CHECK DATE | 06/29/2023 |

COMMENTS:

MENCOM CORPORATION

TITLE:
4 PL PUR M-F EXT.

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | MDCP-4MFP-ZZ | B |

SCALE: 3:2 | WEIGHT: | SHEET 1 OF 1