
8	7	6	5	4	3	
		100 FEE	Г [30.5M] ———			
SPECIFICATIONS:	[6] ∅.24	Each coile	n cable blunt cut or ed and tied.	n both ends,		
UL STYLE:	AWM 21209 or 20233					
CSA STYLE:	I / II AB					
CABLE JACKET MATERIAL:	Lubrizol 58202 Yellow PUF	R				
CABLE JACKET THICKNESS:	.03" nom.					
COND. JACKET MATERIAL:	PVC					
COND. JACKET THICKNESS:	.01" nom.					
COND. STRANDING:	24AWG - 19x36 TC		_			
FILLER:	Solid flexible PVC		_			
SEPARATOR:	Foil Mylar, foil side toward	conductors	_			
DRAIN WIRE:	24AWG - 7x32 TC					
ELECTRICAL REQUIREMENTS:					UNLESS OTHERWISE SPECIFIED	D:
VOLTAGE	300V				DIMENSIONS ARE IN INCHES AND [MM]	DRAW
			-			CHEC
MECHANICAL REQUIREMENTS:						ENG A
			_			MFG .
EXTRUSION STYLE:	PRESSURE EXTRUSION		PROPRIETARY AND CONFIDENTIAL			Q.A.
	INDENT PRINTING OF UL	/ CSA INFORMATION. NO	THE INFORMATION CONTAINED IN THIS		MATERIAL	СОМ
JACKET PRINTING:	COMPANY NAMES ALLO		DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY			
CONVOLUTIONS:	NONE ALLOWED. LEVEL		REPRODUCTION IN PART OR AS A WHOL WITHOUT THE WRITTEN PERMISSION OF	E	FINISH	
REEL SIZE:	24"		MENCOM CORPORATION IS			_
			PROHIBITED.		DO NOT SCALE DRAWING	
8	7	6	5	4	3	

	2	1				
REVISIONS						
REV.	DESCRIPTION	DATE	APPROVED			
A	DRAWN IN SW	10/16/2013	ΗLΓ			



D

В

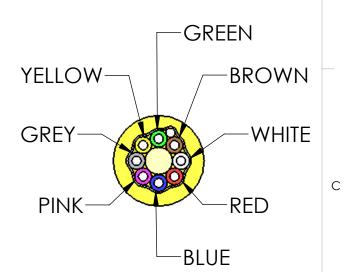