
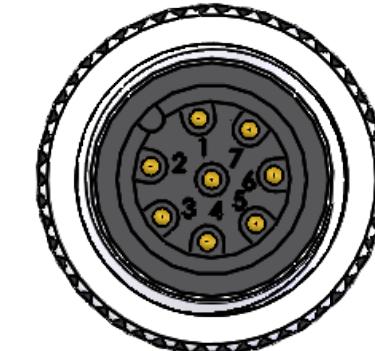
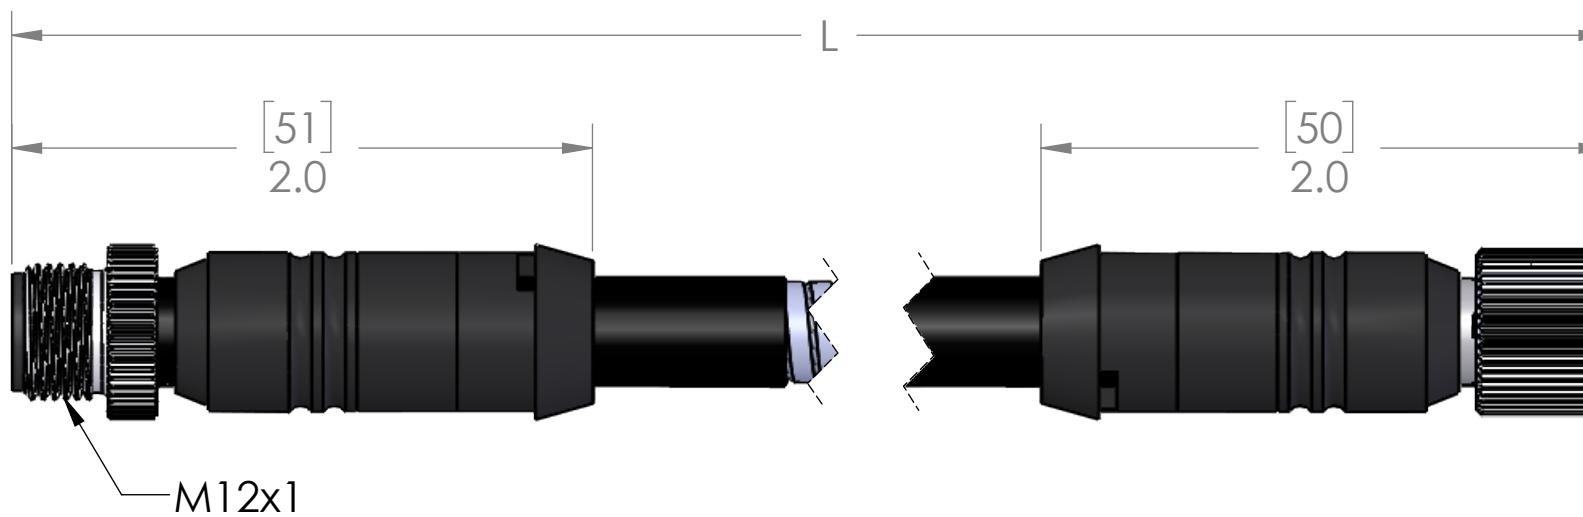


| MALE PIN # | WIRING | FEMALE PIN # |
|------------|--------|--------------|
| 1 | ---- | 1 |
| 2 | ---- | 2 |
| 3 | ---- | 3 |
| 4 | ---- | 4 |
| 5 | ---- | 5 |
| 6 | ---- | 6 |
| 7 | ---- | 7 |
| 8 | ---- | 8 |
| COUPLING | SHIELD | COUPLING |

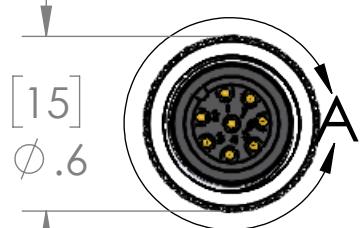

**DETAIL A
SCALE 3 : 1**

DETAIL B
SCALE 3 : 1

| | |
|--------------------------|---------------------------------|
| MATERIALS | |
| BODY: | BLACK PUR |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| CABLE: | |
| STYLE: | AWM |
| AWG: | 24 AWG |
| JACKET: | BLACK PUR |
| VOLTAGE: | 600V |
| SHIELD: | MYLAR W/DRAIN |
| COUPLING: | NICKEL PLATED BRASS |
| INSERT: | POLYAMIDE |
| O-RING: | FPM |
| ARMOR: | SS FLEX TUBE |
| HEAT SHRINK: | POLYOLEFIN |
| | |
| APPROVALS | |
| A US: | UL LISTED |
| CANADA: | C-UL LISTED |
| ROHS: | YES |
| CE: | YES |
| | |
| RATINGS | |
| PROTECTION CLASS: | IEC IP69 |

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

| | |
|-------|------|
| VOLTS | 60V |
| AMPS | 2A |
| TEMP: | 80°C |

| | |
|--------------------------------------|------------|
| UNLESS OTHERWISE SPECIFIED: | DRAWN BY |
| DIMENSIONS ARE IN INCHES AND [MM] | DRAWN DATE |
| | CHECKED BY |
| | CHECK DATE |
| | COMMENT |
| MATERIAL | |
| FINISH | |
| DO NOT SCALE DRAWING | |

ITS LISTED AS NOT BEING STANDARD
HAVE MINIMUM ORDER QUANTITIES

MENCOM CORPORATION

TITLE

| | | |
|--------------|--------------------------|------------|
| SIZE | DWG. NO. | REV |
| B | MDCP-8MFPS-ZZ-A01 | B |
| SCALE: 1:5:1 | WEIGHT: | SHEET 1 OF |