WIRING		
PIN #		PIN #
1	----------	1
2	----------	2
3	----------	3
4	----------	4
5	----------	5
6	----------	6
7	----------	7
8	----------	8
9	----------	9
10	----------	10
11	----------	11
12	----------	12

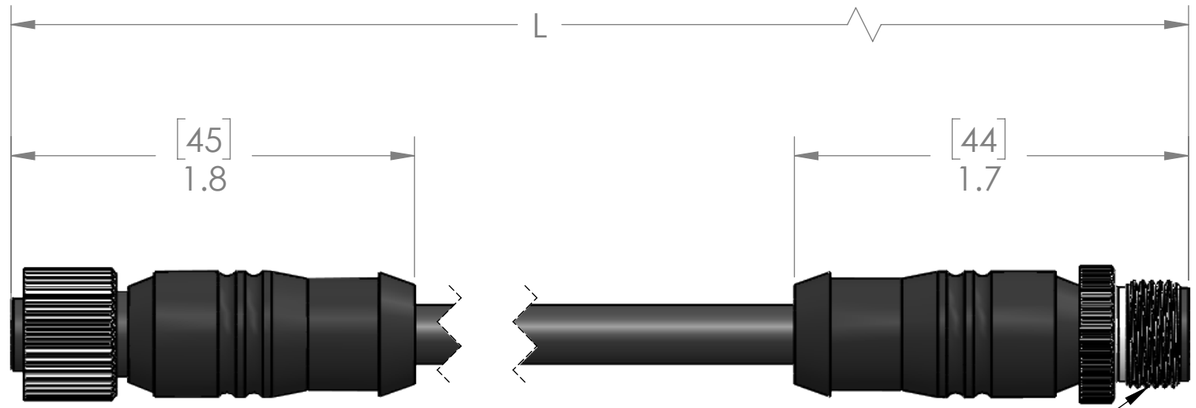

P/N	L	STD?
MDCPM-12MFP-1M-B	40" [1m]	YES
MDCPM-12MFP-2M-B	79" [2m]	YES
MDCPM-12MFP-3M-B	118" [3m]	YES
MDCPM-12MFP-4M-B	157" [4m]	YES
MDCPM-12MFP-5M-B	197" [5m]	YES
MDCPM-12MFP-8M-B	315" [8m]	NO
MDCPM-12MFP-10M-B	393" [10m]	YES
MDCPM-12MFP-15M-B	590" [15m]	YES
MDCPM-12MFP-20M-B	787" [20m]	YES

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS

MATERIALS	
BODY:	BLACK PUR
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	24 AWG
JACKET:	BLACK PUR
VOLTAGE:	300V
SHIELD:	MYLAR W/DRAIN
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	30V
AMPS	2A
TEMP:	80°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	03/16/2023
CHECKED BY	ADM
CHECK DATE	03/16/2023

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MDCPM-12MFP-ZZ-B	C

SCALE: 3:2 | WEIGHT: | SHEET 1 OF 1