


MALE		FEMALE
PIN #	Wiring	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4

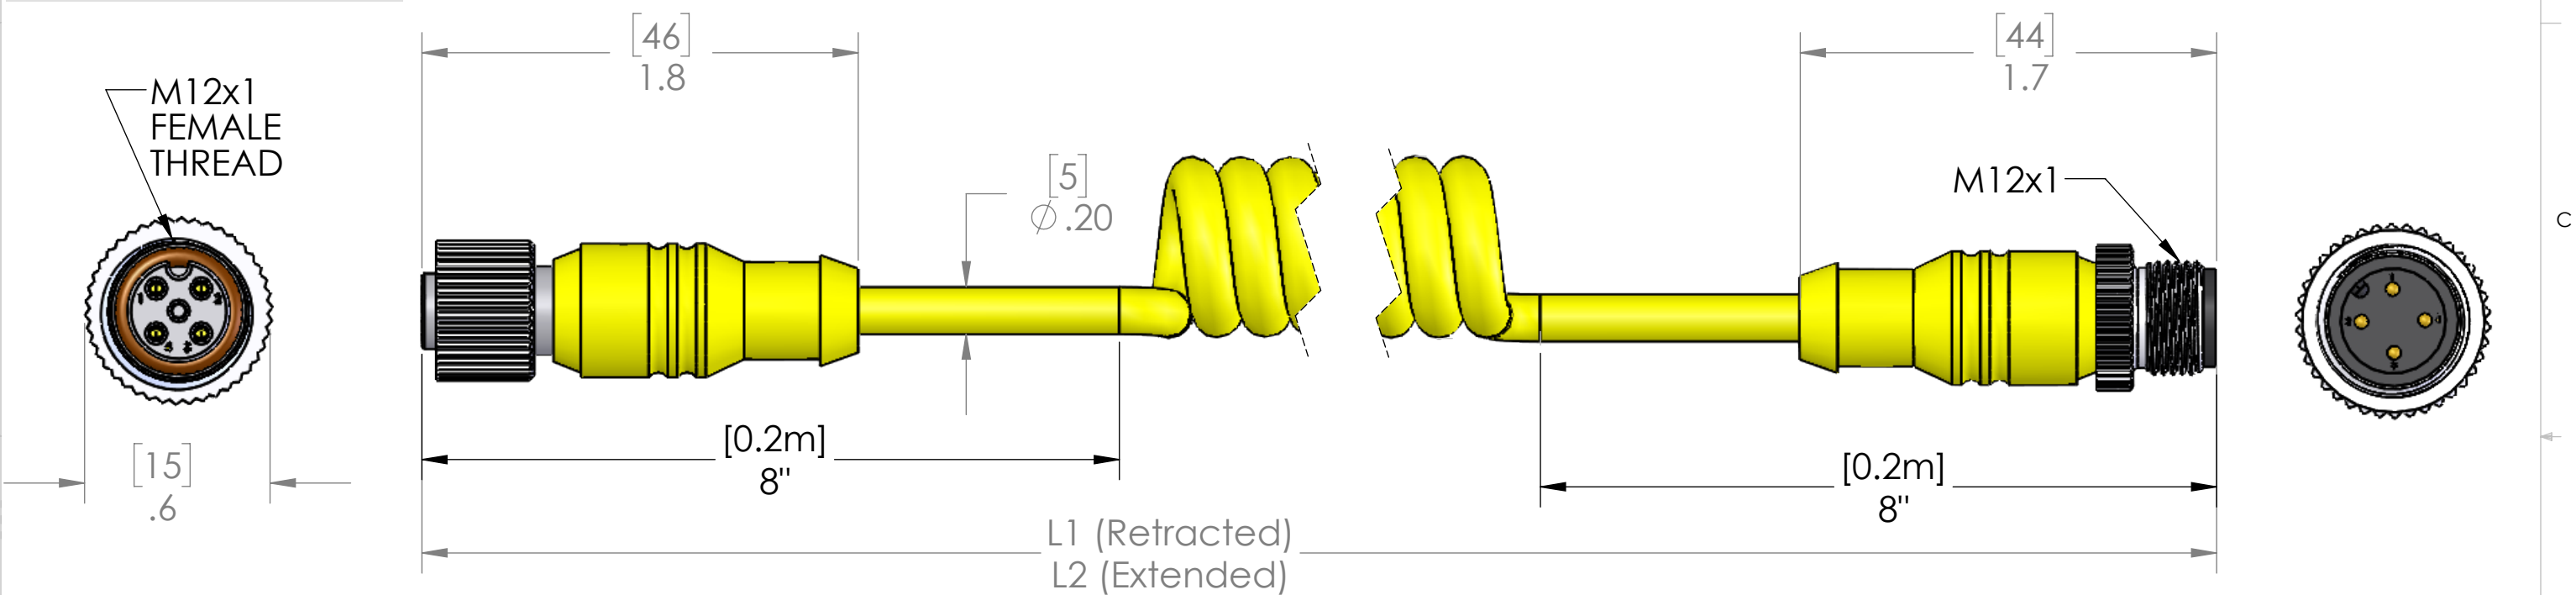

B MATERIALS	
BODY:	YELLOW PUR
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	YELLOW PUR
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
A APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	IEC IP69

P/N	L1	L2
MDCPQ-4MFP-1M	21" [0.5m]	40" [1m]
MDCPQ-4MFP-2M	29" [0.7m]	79" [2m]
MDCPQ-4MFP-3.3M	39" [1m]	120" [3.3m]

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM	MENCOM CORPORATION		
	DRAWN DATE	07/20/2023			
	CHECKED BY	JJH			
	CHECK DATE	07/20/2023			
			TITLE: 4 PL MDC M-F EXT 22AWG		
MATERIAL	COMMENTS:		SIZE	DWG. NO.	REV
FINISH			B	MDCPQ-4MFP-ZZ	C
DO NOT SCALE DRAWING			SCALE: 3:2	WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	80°C