WIRING		
MALE PIN #		FEMALE PIN #
1	-------	1
2	-------	2
3	-------	3
4	-------	4

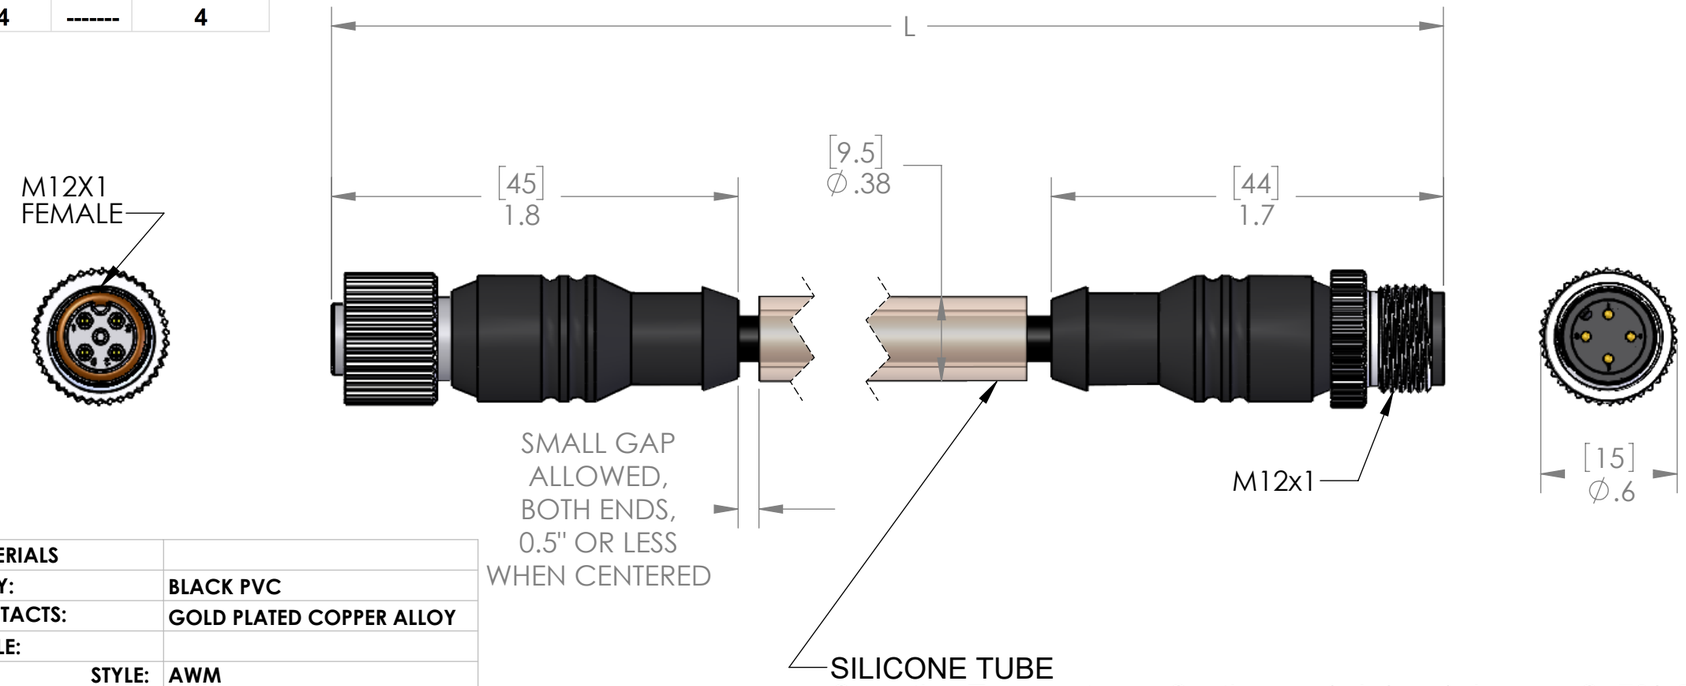

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	BLACK TPE, HIGH FLEX
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
ARMOR:	SILICONE TUBING
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MDCWF-4MFP-0.5M-A50	20" [0.5M]
MDCWF-4MFP-1M-A50	40" [1M]
MDCWF-4MFP-1.5M-A50	59" [1.5M]
MDCWF-4MFP-2M-A50	79" [2M]
MDCWF-4MFP-3M-A50	118" [3M]
MDCWF-4MFP-4M-A50	157" [4M]

** Longer length runs will require a larger OD silicone tube. Please consult factory

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	06/28/2023
CHECKED BY	JJH
CHECK DATE	06/29/2023

COMMENTS:

MENCOM CORPORATION

TITLE:
4 POL M-F EXT, TPE

SIZE	DWG. NO.	REV
B	MDCWF-4MFP-ZZ-A50	B

SCALE: 3:2 WEIGHT: SHEET 1 OF 1