WIRING		
MALE		FEMALE
PIN #		PIN #
1	-------	1
2	-------	2
3	-------	3
4	-------	4



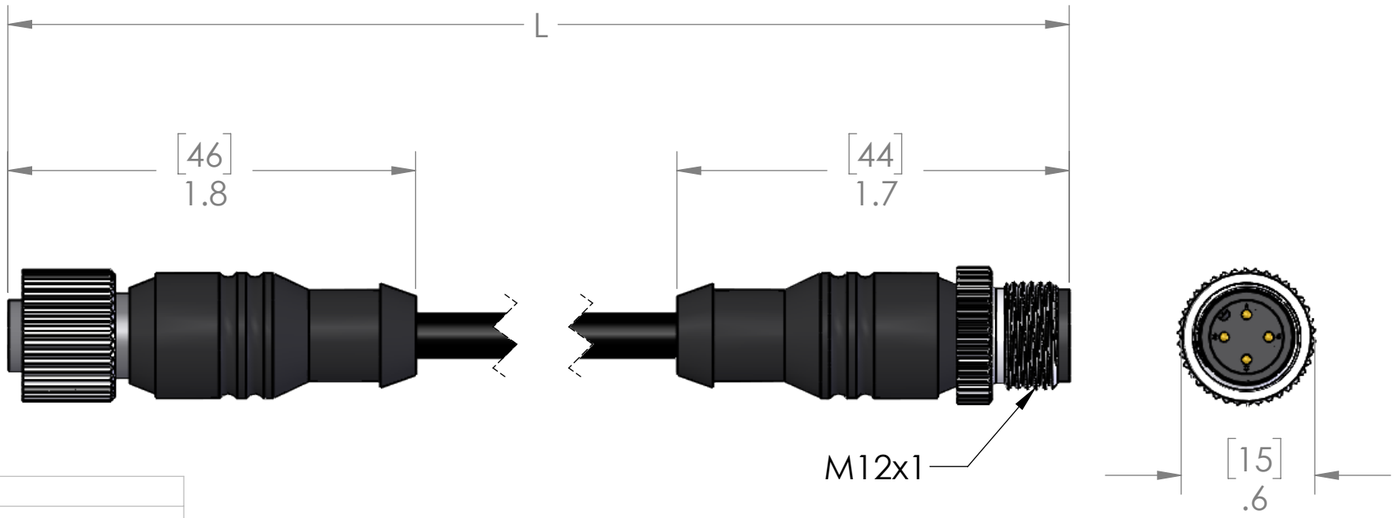

TABLE A		
P/N	L	STD?
MDCWF-4MFP-0.3M	12" [0.3m]	NO
MDCWF-4MFP-0.5M	20" [0.5m]	NO
MDCWF-4MFP-1M	40" [1m]	YES
MDCWF-4MFP-2M	79" [2m]	YES
MDCWF-4MFP-3M	118" [3m]	NO
MDCWF-4MFP-4M	157" [4m]	NO
MDCWF-4MFP-5M	197" [5m]	YES
MDCWF-4MFP-6M	236" [6m]	NO
MDCWF-4MFP-8M	315" [8m]	NO
MDCWF-4MFP-10M	393" [10m]	YES
MDCWF-4MFP-15M	590" [15m]	YES
MDCWF-4MFP-20M	786" [20m]	NO
MDCWF-4MFP-25M	983" [25m]	NO
MDCWF-4MFP-30M	1179" [30m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	BLACK TPE
VOLTAGE:	600V
SHIELD:	NO
FLEX CYCLES:	10 MILLION
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	07/21/2023
CHECKED BY	JJH
CHECK DATE	07/24/2023

COMMENTS:

MENCOM CORPORATION

TITLE:
4 POL M-F EXT, TPE

SIZE	DWG. NO.	REV
B	MDCWF-4MFP-ZZ	C

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1