



MATERIALS			
BODY:	BLACK PVC GOLD PLATED COPPER ALLOY		
CONTACTS:			
CABLE:			
STYLE:	AWM CAT 5e 24 AWG TEAL PVC		
AWG:			
JACKET:			
VOLTAGE:	600V		
SHIELD:	NO		
COUPLING:	NICKEL PLATED BRASS		
INSERT:	POLYAMIDE		
O-RING:	N/A		
APPROVALS			
US:	UL LISTED		
CANADA:	C-UL LISTED		
ROHS:	YES		
CE & UKCA:	YES		
RATINGS			
DROTECTION OF ACC.	UL TYPE 4 & 12, IEC IP69		

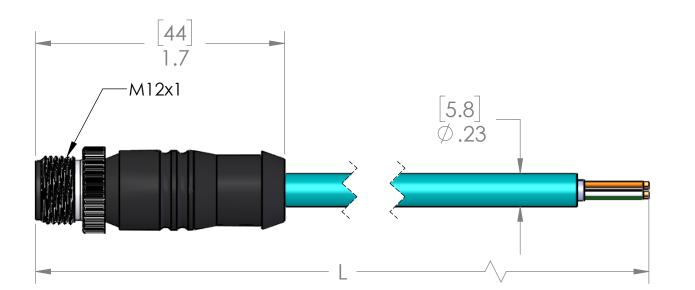


TABLE A							
P/N	L	STD?					
MDE45-4MP-1M	40" [1m]	YES					
MDE45-4MP-2M	79" [2m]	YES					
MDE45-4MP-3M	118" [3m]	NO					
MDE45-4MP-4M	157" [4m]	NO					
MDE45-4MP-5M	197" [5m]	YES					
MDE45-4MP-6M	236" [6m]	NO					
MDE45-4MP-8M	315" [8m]	NO					
MDE45-4MP-10M	393" [10m]	YES					
MDE45-4MP-15M	591" [15m]	YES					
MDE45-4MP-20M	787" [20m]	NO					
MDE45-4MP-30M	1181" [30m]	NO					
MDE45-4MP-50M	1969" [50m]	NO					

PARTS LISTED AS NOT BEING STANDARD MAY REQUIRE A MINIMUM ORDER QTY

				, <u>_</u>		<u>.</u>	· ·
	UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM	MENIC	COM CORPORATI	ON	
	DIMENSIONS ARE IN INCHES	DRAWN DATE	08/14/2023	IVILINO		OIN	
AND [MM]	CHECKED BY	JJH	TITLE:				
		CHECK DATE	08/15/2023				
)V							
) V			:				
	MATERIAL			SIZE DWG.	NO.		REV
C.	FINISH			В	MDE45-4MP-Z	Z	В
	DO NOT SCALE DRAWING			SCALE: 3:2	WEIGHT:	SHEET	I OF 1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS 300 **AMPS** 4A TEMP: 80°C