


MALE		FEMALE
PIN #	Wiring	PIN #
1	WHITE w/ORANGE	1
2	WHITE w/GREEN	2
3	ORANGE	3
4	GREEN	4

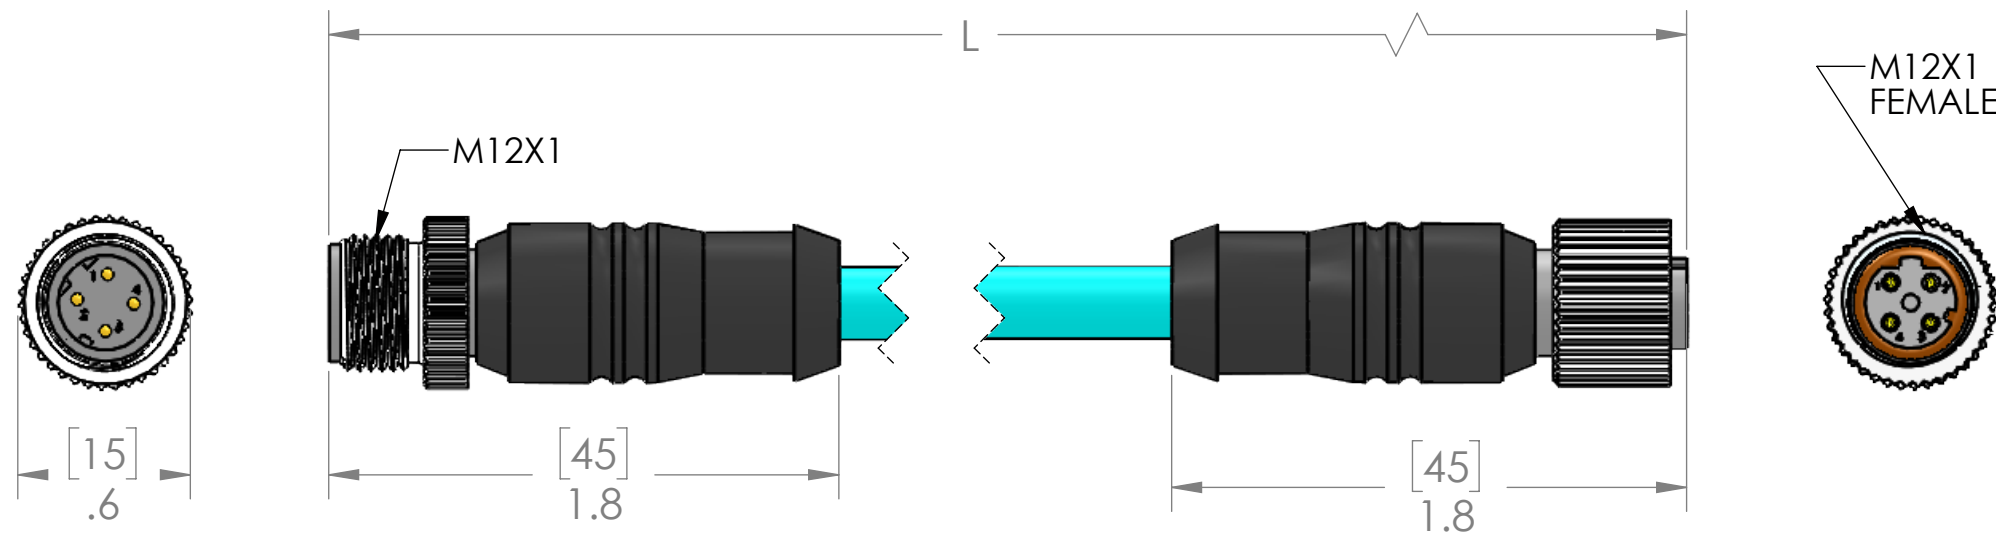

P/N	L	STD?
MDE45PB-4MFP-1M	40" [1m]	YES
MDE45PB-4MFP-2M	79" [2m]	YES
MDE45PB-4MFP-3M	118" [3m]	NO
MDE45PB-4MFP-4M	157" [4m]	NO
MDE45PB-4MFP-5M	197" [5m]	YES
MDE45PB-4MFP-6M	236" [6m]	NO
MDE45PB-4MFP-8M	315" [8m]	NO
MDE45PB-4MFP-10M	393" [10m]	YES
MDE45PB-4MFP-15M	590" [15m]	YES

PARTS LISTED AS NOT BEING STANDARD  
MAY REQUIRE MINIMUM ORDERS

MATERIALS	
BODY:	BLACK PUR
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM CAT 5e
AWG:	24 AWG
JACKET:	TEAL PUR
VOLTAGE:	600V
SHIELD:	BRAIDED
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	IEC IP69

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	80°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	08/24/2023
	CHECKED BY	JJH
	CHECK DATE	08/24/2023
COMMENTS:		
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
<b>B</b>	MDE45PB-4MFP-ZZ	<b>B</b>
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1