
	WIRING	
MALE		FEMALE
PIN#		PIN#
1	WHITE w/ORANGE	1
2	WHITE w/GREEN	2
3	ORANGE	3
4	GREEN	4

-M12x1 Female



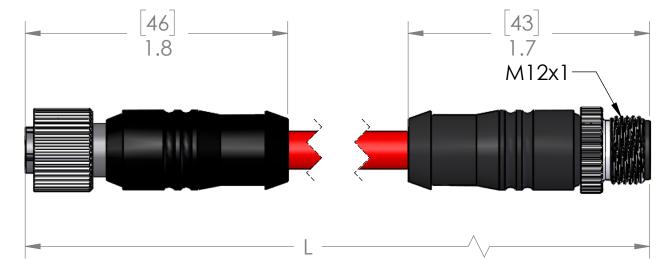

MATERIALS BODY: **BLACK PVC CONTACTS: GOLD PLATED COPPER ALLOY** CABLE: STYLE: AWM CAT 5e AWG: 24 AWG JACKET: RED TPE VOLTAGE: 600V SHIELD: BRAIDED FLEX CYCLES: 1MM COUPLING: **NICKEL PLATED BRASS** INSERT: POLYAMIDE O-RING: FPM **APPROVALS** A US: **UL LISTED** CANADA: C-UL LISTED ROHS: YES **VOLTS** PROPRIETARY AND CONFIDENTIAL CE: YES THE INFORMATION CONTAINED IN THIS **AMPS** DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF TEMP: **RATINGS** MENCOM CORPORATION IS PROHIBITED. PROTECTION CLASS: UL TYPE 4 & 12, IEC IP69

TABLE A							
P/N	L	STD?					
MDE45WB-4MFP-0.5M-RD	20" [0.5M]	NO					
MDE45WB-4MFP-1M-RD	40" [1M]	YES					
MDE45WB-4MFP-1.5M-RD	59" [1.5M]	NO					
MDE45WB-4MFP-2M-RD	79" [2M]	YES					
MDE45WB-4MFP-3M-RD	118" [3M]	NO					
MDE45WB-4MFP-4M-RD	157" [4M]	NO					
MDE45WB-4MFP-5M-RD	197" [5M]	YES					
MDE45WB-4MFP-6M-RD	236" [6M]	NO					
MDE45WB-4MFP-8M-RD	315" [8M]	NO					
MDE45WB-4MFP-10M-RD	393" [10M]	YES					
MDE45WB-4MFP-15M-RD	591" [15M]	YES					
MDE45WB-4MFP-20M-RD	786" [20M]	NO					
MDE45WB-4MFP-25M-RD	983" [25M]	NO					
MDE45WB-4MFP-30M-RD	1179" [30M]	NO					
DARTS LISTED AS NOT BEING STANDARD							

PARTS LISTED AS NOT BEING STANDARD MAY HAVE MINIMUM ORDER QUANTITIES

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM	A A ENICONA CODDODATIONI							
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	08/23/2023	MENCOM CORPORATION					אוי		
	CHECKED BY	JJH	TITLE	:						
	CHECK DATE	08/24/2023	10010000001					A		
			4 POL D-CODED MAL- FEM EXT							
	COMMENTS:									
MATERIAL			SIZE	DWG.	NO.			REV		
FINISH			B MDE45WB-4MFP-ZZ-					Z-RD	В	
DO NOT SCALE DRAWING			SCAL	E: 3:2	WEIGHT:		SHEET 1	OF 1		

6 5 4 3 2

300V

80°C

4A