WIRING		
MALE PIN #		MALE PIN #
1	WHITE w/ORANGE	1
2	WHITE w/GREEN	2
3	ORANGE	3
4	GREEN	4

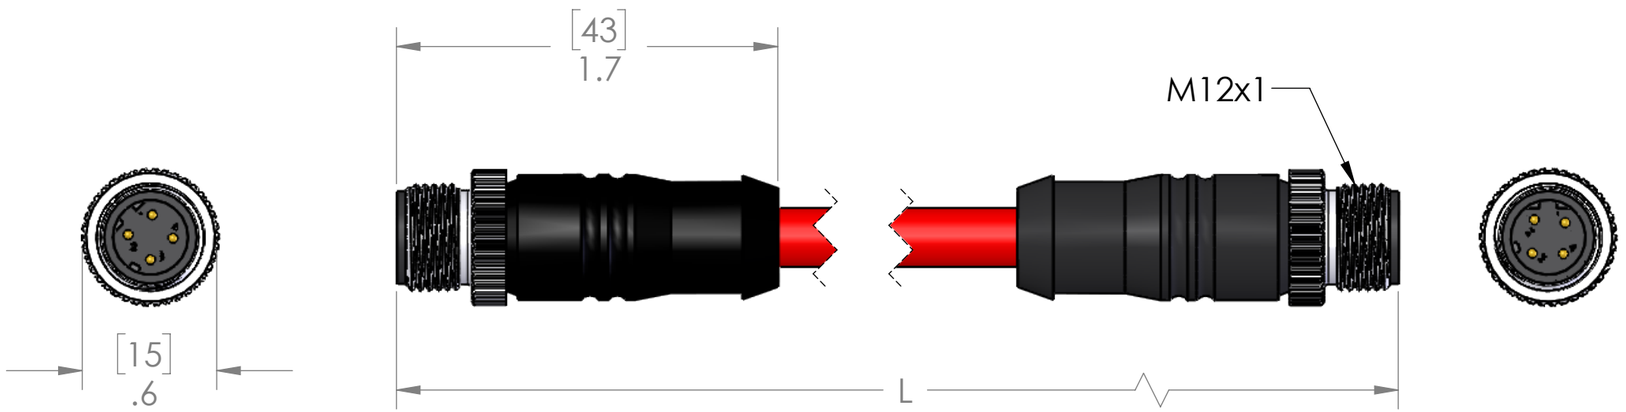

TABLE A		
P/N	L	STD?
MDE45WB-4MMP-0.5M-RD	20" [0.5M]	NO
MDE45WB-4MMP-1M-RD	40" [1M]	YES
MDE45WB-4MMP-1.5M-RD	59" [1.5M]	NO
MDE45WB-4MMP-2M-RD	79" [2M]	YES
MDE45WB-4MMP-3M-RD	118" [3M]	NO
MDE45WB-4MMP-4M-RD	157" [4M]	NO
MDE45WB-4MMP-5M-RD	197" [5M]	YES
MDE45WB-4MMP-6M-RD	236" [6M]	NO
MDE45WB-4MMP-8M-RD	315" [8M]	NO
MDE45WB-4MMP-10M-RD	393" [10M]	YES
MDE45WB-4MMP-15M-RD	591" [15M]	YES
MDE45WB-4MMP-20M-RD	786" [20M]	NO
MDE45WB-4MMP-25M-RD	983" [25M]	NO
MDE45WB-4MMP-30M-RD	1179" [30M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM CAT 5e
AWG:	24 AWG
JACKET:	RED TPE
VOLTAGE:	600V
SHIELD:	BRAIDED
FLEX CYCLES:	1MM @ 10X CABLE OD, MIN RADIUS
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	N/A
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	80°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	08/25/2023
CHECKED BY	JJH
CHECK DATE	08/25/2023

COMMENTS:

MENCOM CORPORATION

TITLE:
4 POL D-CODED MAL-MAL EXT

SIZE	DWG. NO.	REV
B	MDE45WB-4MMP-ZZ-RD	B

SCALE: 3:2 | WEIGHT: | SHEET 1 OF 1